



TRANSMITTAL LETTER

TO: Librarian
Joe A. Guerra Laredo Public Library
1120 East Calton Road
Laredo, Texas 78041

PROJECT CODE: LAR-LAR-WWRNW25 | 26328

FROM: Ms. Hailey Cofty

RE: Public notice library copy of Industrial Wastewater Permit Renewal Application for Permit No. WQ0001200000 for City Public Service Board

DATE: August 25, 2025

PLEASE REVIEW	☐
FOR YOUR FILES	☒
CALL ME	☐
PER YOUR REQUEST	☐
FORWARD TO	☐
OTHER	☐

Enclosed is a copy of the Industrial Wastewater Permit Renewal Application for Permit Number WQ0001200000 for the above referenced facility. Please place this document on your shelves before August 28, 2025 for public review and copying at your library. The document must be available during the entire permitting process. We will contact you at the conclusion of the permitting process to let you know that the binder may be removed from your shelves.

Please call if you have any questions. Thank you in advance for your assistance.

Thanks,
Hailey Cofty
hcofty@wcmgroup.com

Enclosures

Transmittal Approval: 
UPS: 1Z07479R0393439092



Dear Customer,

This notice serves as proof of delivery for the shipment listed below.

Tracking Number

1Z07479R0393439092

Service

UPS Ground

Shipped / Billed On

08/25/2025

Delivered On

08/26/2025 2:50 P.M.

Delivered To

1Z07479R0393439092

Received By

Tuesday, August 26 at 2:50 P.M. at Front Desk

Left At

Front Desk

Delivered To

LAREDO, TX, US

For more information on your records as photo and details are only available for a limited time.

Received By:

REYES

Tracking results provided by UPS: 08/29/2025 12:38 P.M. EST

[Print this page](#)

- ✓ **Label Created**
United States
08/25/2025, 2:06 P.M.
- ✓ **Dropped off at UPS Store by Customer**
Houston, TX, United States
08/25/2025, 5:06 P.M.
- ✓ **We Have Your Package**
Houston, TX, United States
08/25/2025, 10:21 P.M.
- ✓ **On the Way**
Laredo, TX, United States
08/26/2025, 6:30 A.M.
- ✓ **Out for Delivery**
Laredo, TX, United States
08/26/2025, 9:54 A.M.
- **Delivered**
LAREDO, TX, US
08/26/2025, 2:50 P.M.

[View All Shipping Details](#) >

Get Answers Fast

If you need help, use the [Virtual Assistant](#). Still stuck? Try our [Tracking Support](#) for more specific guidance.

Notify Me

File a Claim

Track Another Package

Track

Shipping

Tracking

Products & Services

The UPS Store

UPS Assistant

11:38 AM

I'm the UPS Virtual Assistant.

If you have a question about how we manage personal data, see our [Privacy Notice](#).

End Chat

Are you sure you want to end your chat?

Yes >

No >

Select an option or type here to continue

[Terms and Conditions](#)

[Website Terms of Use](#)

[Proof of Delivery](#)

[Your California Privacy Rights](#)

[Privacy Notice](#)

Dear Customer,

This document serves as proof of delivery for the shipment listed below.

[Cookie Settings](#)

Tracking Number

Do Not Sell or Share My Personal Information

1Z07475R0393439992

Copyright ©1994-2025 United Parcel Service of America, Inc. All rights reserved.

UPS Ground

Shipped / Billed On

08/25/2025

Delivered On

08/26/2025 2:50 P.M.

Delivered To

LAREDO, TX, US

Received By

REYES

Left At

Front Desk

Please print for your records as photo and details are only available for a limited time.

Sincerely,

UPS

Tracking results provided by UPS: 08/29/2025 12:38 P.M. EST

UPS Assistant



11:38 AM

I'm the UPS Virtual Assistant.

If you have a question about how we manage personal data, see our Privacy Notice.

End Chat

Are you sure you want to end your chat?

›

›



THE WCM GROUP, INC.
110 S. Bender Ave., Humble, TX 77338
P.O. Box 3247, Humble, TX 77347

July 14, 2025

Executive Director
Applications Review and Processing Team, MC-148
Texas Commission on Environmental Quality
12100 Park 35 Circle
Austin, Texas 78753

UPS NUMBER
1Z07479R4293907824

REFERENCE: Industrial Wastewater Permit Renewal Application
TPDES Permit No. WQ0001200000; NPDES Permit No. TX0001627
City Public Service Board
Laredo Power Station
Laredo, Webb County, Texas
CN600129019; RN100213909

Dear Sir or Madam,

On behalf of City Public Service Board, Laredo Power Station, The WCM Group Inc. is submitting this application for the renewal of Texas Commission on Environmental Equality (TCEQ) TPDES Permit No. WQ0001200000.

The application fee of \$1,215.00 has been paid via TCEQ ePay, a copy of the voucher receipt is provided in Attachment A of the enclosed application.

Should you have any questions, or require additional information regarding this matter, please feel free to contact me at (281) 446-7070.

Sincerely,

Hailey J. Cofty
Project Manager
hcofty@wcmgroup.com

HJC/ala
ENCLOSURE

TEXAS COMMISSION ON ENVIRONMENTAL QUALITY
PERMIT RENEWAL TO DISCHARGE, DEPOSIT
OR DISPOSE OF WASTE(S) INTO OR
ADJACENT TO WATER IN THE STATE
TPDES PERMIT NO. WQ0001200000

Prepared for
CITY PUBLIC SERVICE BOARD
LAREDO POWER STATION
Laredo, Texas

June 2025



THE WCM GROUP, INC.
110 S. Bender Ave., Humble, TX 77338
P.O. Box 3247, Humble, TX 77347
phone 281.446.7070 | fax 281.446.3348
wcmgroup.com

TABLE OF CONTENTS

EXECUTIVE SUMMARY

ADMINISTRATIVE REPORT 1.0

TECHNICAL REPORT 1.0

WORKSHEET 1.0 - EPA CATEGORICAL EFFLUENT GUIDELINES

WORKSHEET 2.0 - POLLUTANT ANALYSIS

WORKSHEET 4.0 - RECEIVING WATERS

FIGURES

- 1 - SITE LOCATION USGS MAP (ADMINISTRATIVE REPORT 1.0, p. 8, Item 11.b)
- 2 - FACILITY LAYOUT MAP (TECHNICAL REPORT 1.0, p. 2, Item 1.d)
- 3 - WASTEWATER PROCESS FLOW DIAGRAM (TECHNICAL REPORT 1.0, p. 3 Item 2.b; TECHNICAL REPORT WORKSHEET 1.0, p. 17, Item 3)

ATTACHMENTS

- A - COPY OF EPAY VOUCHER (ADMINISTRATIVE REPORT 1.0, p. 3, Item 1.h)
- B - CORE DATA FORM (ADMINISTRATIVE REPORT 1.0, p. 4, Item 4.a)
- C - PLAIN LANGUAGE SUMMARY (ADMINISTRATIVE REPORT, p. 7, Item 9.f)
- D - SUPPLEMENTAL PERMIT INFORMATION FORM (SPIF) (ADMINISTRATIVE REPORT, p. 14)
- E - SAFETY DATA SHEETS (TECHNICAL REPORT 1.0, p. 2, Item 1.c; TECHNICAL REPORT 1.0, p. 8, Item 5.b)
- F - CONTRACT LABORATORY INFORMATION (TECHNICAL REPORT WORKSHEET 2.0, p. 19, Item 1.c)

EXECUTIVE SUMMARY

EXECUTIVE SUMMARY
TPDES WASTEWATER PERMIT RENEWAL APPLICATION
LAREDO POWER STATION
LAREDO, TEXAS

BACKGROUND

City Public Service Board owns and operates the Laredo Power Station (LPS), located at 7300 CPL Road in Laredo, Webb County, Texas, a natural gas-fired electric power generation facility. The facility operates two natural gas-fired combustion turbines (Unit 4 and Unit 5) which are operated in simple cycle mode. The combined nominal generating capacity of the simple cycle operation is approximately 177 megawatts (MW). The facility is authorized by the Texas Commission on Environmental Quality (TCEQ) to discharge cooling tower blowdown commingled with low volume wastewater, previously monitored chemical metal cleaning waste, and stormwater into waters of the state via Outfall 001 in accordance with TPDES Permit No. WQ0001200000. LPS is hereby submitting this renewal application for TPDES Permit No. WQ0001200000 (EPA ID No. TX0001627).

The current permit was issued on January 29, 2021 and expires on January 29, 2026. LPS primarily discharges cooling tower blowdown which requires minimal to no treatment. Wastewater generated on-site includes cooling tower blowdown, low volume wastes, stormwater run-off, and chemical metal cleaning wastes. Sanitary sewage generated on site is disposed of at the City of Laredo Zacate Creek WWTP.

Chemical metal cleaning waste is intermittently discharged via Internal Outfall 101, which subsequently discharges through Outfall 001.

Cooling tower blowdown, low volume waste, stormwater run-off, and previously monitored chemical metal cleaning waste from Internal Outfall 101 is discharged via Outfall 001 directly to the Rio Grande Below Amistad Reservoir in Segment No 2304.

ADMINISTRATIVE REPORT 1.0



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

INDUSTRIAL WASTEWATER PERMIT APPLICATION CHECKLIST

Complete and submit this checklist with the industrial wastewater permit application.

APPLICANT NAME: City Public Service Board

PERMIT NUMBER (If new, leave blank): WQ00 01200000

Indicate if each of the following items is included in your application.

	Y	N		Y	N
Administrative Report 1.0	☒	☐	Worksheet 8.0	☐	☒
Administrative Report 1.1	☐	☒	Worksheet 9.0	☐	☒
SPIF	☒	☐	Worksheet 10.0	☐	☒
Core Data Form	☒	☐	Worksheet 11.0	☐	☒
Public Involvement Plan Form	☐	☒	Worksheet 11.1	☐	☒
Plain Language Summary	☒	☐	Worksheet 11.2	☐	☒
Technical Report 1.0	☒	☐	Worksheet 11.3	☐	☒
Worksheet 1.0	☒	☐	Original USGS Map	☒	☐
Worksheet 2.0	☒	☐	Affected Landowners Map	☐	☒
Worksheet 3.0	☐	☒	Landowner Disk or Labels	☐	☒
Worksheet 3.1	☐	☒	Flow Diagram	☒	☐
Worksheet 3.2	☐	☒	Site Drawing	☒	☐
Worksheet 3.3	☐	☒	Original Photographs	☒	☐
Worksheet 4.0	☒	☐	Design Calculations	☐	☒
Worksheet 4.1	☐	☒	Solids Management Plan	☐	☒
Worksheet 5.0	☐	☒	Water Balance	☐	☒
Worksheet 6.0	☐	☒			
Worksheet 7.0	☐	☐			

For TCEQ Use Only

Segment Number _____ County _____
Expiration Date _____ Region _____
Permit Number _____



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

INDUSTRIAL WASTEWATER PERMIT APPLICATION

ADMINISTRATIVE REPORT 1.0

This report is required for all applications for TPDES permits and TLAPs, except applications for oil and gas extraction operations subject to 40 CFR Part 435. Contact the Applications Review and Processing Team at 512-239-4671 with any questions about completing this report.

Applications for oil and gas extraction operations subject to 40 CFR Part 435 must use the Oil and Gas Exploration and Production Administrative Report ([TCEQ Form-20893 and 20893-inst¹](#)).

Item 1. Application Information and Fees (Instructions, Page 26)

- a. Complete each field with the requested information, if applicable.

Applicant Name: City Public Service Board

Permit No.: WQ00001200000

EPA ID No.: TX0001627

Expiration Date: 1/29/2026

- b. Check the box next to the appropriate authorization type.

☒ Industrial Wastewater (wastewater and stormwater)

☐ Industrial Stormwater (stormwater only)

- c. Check the box next to the appropriate facility status.

☒ Active

☐ Inactive

- d. Check the box next to the appropriate permit type.

☒ TPDES Permit

☐ TLAP

☐ TPDES with TLAP component

- e. Check the box next to the appropriate application type.

☐ New

☐ Renewal with changes

☒ Renewal without changes

☐ Major amendment with renewal

☐ Major amendment without renewal

☐ Minor amendment without renewal

☐ Minor modification without renewal

- f. If applying for an amendment or modification, describe the request: N/A

For TCEQ Use Only

Segment Number _____ County _____

Expiration Date _____ Region _____

Permit Number _____

¹ https://www.tceq.texas.gov/publications/search_forms.html

g. Application Fee

EPA Classification	New	Major Amend. (with or without renewal)	Renewal (with or without changes)	Minor Amend. / Minor Mod. (without renewal)
Minor facility not subject to EPA categorical effluent guidelines (40 CFR Parts 400-471)	☐ \$350	☐ \$350	☐ \$315	☐ \$150
Minor facility subject to EPA categorical effluent guidelines (40 CFR Parts 400-471)	☐ \$1,250	☐ \$1,250	☒ \$1,215	☐ \$150
Major facility	N/A ²	☐ \$2,050	☐ \$2,015	☐ \$450

h. Payment Information

Mailed

Check or money order No.: [Click to enter text.](#)

Check or money order amt.: [Click to enter text.](#)

Named printed on check or money order: [Click to enter text.](#)

Epay

Voucher number: 774715 / 774716

Copy of voucher attachment: A

Item 2. Applicant Information (Instructions, Pages 26)

a. Customer Number, if applicant is an existing customer: CN600129019

Note: Locate the customer number using the [TCEQ's Central Registry Customer Search](#)³.

b. Legal name of the entity (applicant) applying for this permit: City Public Service Board

Note: The owner of the facility must apply for the permit. The legal name must be spelled exactly as filed with the TX SOS, Texas Comptroller of Public Accounts, County, or in the legal documents forming the entity.

c. Name and title of the person signing the application. (**Note:** The person must be an executive official that meets signatory requirements in 30 TAC § 305.44.)

Prefix: Mr. Full Name (Last/First Name): Gregg Tieken

Title: Director Environmental Planning and Compliance Credential: [Click to enter text.](#)

d. Will the applicant have overall financial responsibility for the facility?

☒ Yes ☐ No

² All facilities are designated as minors until formally classified as a major by EPA.

³ <https://www15.tceq.texas.gov/crpub/index.cfm?fuseaction=cust.CustSearch>

Note: The entity with overall financial responsibility for the facility must apply as a co-applicant, if not the facility owner.

Item 3. Co-applicant Information (Instructions, Page 27)

☒ Check this box if there is no co-applicant.; otherwise, complete the below questions.

a. Legal name of the entity (co-applicant) applying for this permit:

Note: The legal name must be spelled exactly as filed with the TX SOS, Texas Comptroller of Public Accounts, County, or in the legal documents forming the entity.

b. Customer Number (if applicant is an existing customer): CN

Note: Locate the customer number using the TCEQ's Central Registry Customer Search.

c. Name and title of the person signing the application. (**Note:** The person must be an executive official that meets signatory requirements in 30 TAC § 305.44.)

Prefix: Full Name (Last/First Name):

Title: Credential:

d. Will the co-applicant have overall financial responsibility for the facility?

☐ Yes ☐ No

Note: The entity with overall financial responsibility for the facility must apply as a co-applicant, if not the facility owner.

Item 4. Core Data Form (Instructions, Pages 27)

a. Complete one Core Data Form (TCEQ Form 10400) for each customer (applicant and co-applicant(s)) and include as an attachment. If the customer type selected on the Core Data Form is Individual, complete Attachment 1 of the Administrative Report. Attachment: B

Item 5. Application Contact Information (Instructions, Page 27)

Provide names of two individuals who can be contact for additional information about this application. Indicate if the individual can be contact about administrative or technical information, or both.

a. ☒ Administrative Contact . ☒ Technical Contact

Prefix: Ms. Full Name (Last/First Name): Summer Johnson

Title: Environmental Analyst Credential:

Organization Name: CPS Energy

Mailing Address: 500 McCullough Avenue / MD: RT0601 City/State/Zip: San Antonio, TX 78215

Phone No: 210-353-2770 Email: SLJohnson@cpsenergy.com

b. ☐ Administrative Contact ☒ Technical Contact

Prefix: Ms. Full Name (Last/First Name): Hailey Cofty

Title: Senior Project Manager Credential:

Organization Name: The WCM Group, Inc.

Mailing Address: PO Box 3247

City/State/Zip: Humble, TX 773347-3247

Phone No: 281-446-7070

Email: hcofty@wcmgroup.com

Attachment: Click to enter text.

Item 6. Permit Contact Information (Instructions, Page 28)

Provide two names of individuals that can be contacted throughout the permit term.

a. Prefix: Mr. Full Name (Last/First Name): Gregg Tieken

Title: Director Environmental Planning and Compliance Credential:

Organization Name: CPS Energy

Mailing Address: 500 McCullough Avenue / MD: 231007 / RT0601
Antonio, TX 78215

City/State/Zip: San

Phone No: 210-353-2158

Email: Grtieken@cpsenergy.com

b. Prefix: Mr. Full Name (Last/First Name): Rick Urrutia

Title: VP General Operations Credential:

Organization Name: CPS Energy

Mailing Address: 500 McCullough Avenue / MD: CT0401 City/State/Zip: San Antonio, TX
78215

Phone No: 210-353-3604

Email: Rjurrutia@cpsenergy.com

Attachment:

Item 7. Billing Contact Information (Instructions, Page 28)

The permittee is responsible for paying the annual fee. The annual fee will be assessed for permits **in effect on September 1 of each year**. The TCEQ will send a bill to the address provided in this section. The permittee is responsible for terminating the permit when it is no longer needed (form TCEQ-20029).

Provide the complete mailing address where the annual fee invoice should be mailed and the name and phone number of the permittee's representative responsible for payment of the invoice.

Prefix: Mr. Full Name (Last/First Name): Gregg Tieken

Title: Director Environmental Planning and Compliance Credential:

Organization Name: CPS Energy

Mailing Address: 500 McCullough Avenue / MD: 231007/RT0601
Antonio, TX 78215

City/State/Zip: San

Phone No: 210-353-2158

Email: Grtieken@cpsenergy.com

Item 8. DMR/MER Contact Information (Instructions, Page 28)

Provide the name and mailing address of the person delegated to receive and submit DMRs or MERs. **Note:** DMR data must be submitted through the NetDMR system. An electronic reporting account can be established once the facility has obtained the permit number.

Prefix: Mr. Full Name (Last/First Name): Gregg Tieken

Title: Director Environmental Planning and Compliance Credential:

Organization Name: CPS Energy

Mailing Address: 500 McCullough Avenue / MD: 231007 / RT0601
Antonio, TX 78215

City/State/Zip: San

Phone No: 210-353-2158

Email: Grtieken@cpsenergy.com

Item 9. Notice Information (Instructions, Pages 28)

a. Individual Publishing the Notices

Prefix: Ms. Full Name (Last/First Name): Hailey Cofty

Title: Senior Project Manager Credential: Click to enter text.

Organization Name: The WCM Group, Inc.

Mailing Address: PO Box 3247

City/State/Zip: Humble, TX 77347-3247

Phone No: 281-446-7070

Email: hcofty@wcmgroup.com

b. Method for Receiving Notice of Receipt and Intent to Obtain a Water Quality Permit Package (only for NORI, NAPD will be sent via regular mail)

☒ E-mail: hcofty@wcmgroup.com

☐ Fax: Click to enter text.

☐ Regular Mail (USPS)

Mailing Address: Click to enter text.

City/State/Zip Code: Click to enter text.

c. Contact in the Notice

Prefix: Ms. Full Name (Last/First Name): Summer Johnson

Title: Environmental Analyst Credential: Click to enter text.

Organization Name: City Public Service Board

Phone No: 210-353-2770

Email: SLJohnson@cpsenergy.com

d. Public Viewing Location Information

Note: If the facility or outfall is located in more than one county, provide a public viewing place for each county.

Public building name: Joe A. Guerra Laredo Public Library
building: Reference Department, 2nd Floor

Location within the

Physical Address of Building: 1120 E. Calton Road

City: Laredo

County: Webb

e. Bilingual Notice Requirements

This information is required for new, major amendment, minor amendment or minor modification, and renewal applications.

This section of the application is only used to determine if alternative language notices will be needed. Complete instructions on publishing the alternative language notices will be in your public notice package.

Call the bilingual/ESL coordinator at the nearest elementary and middle schools and obtain the following information to determine if an alternative language notice(s) is required.

1. Is a bilingual education program required by the Texas Education Code at the elementary or middle school nearest to the facility or proposed facility?

☒ Yes ☐ No

If no, publication of an alternative language notice is not required; skip to Item 8 (Regulated Entity and Permitted Site Information.)

2. Are the students who attend either the elementary school or the middle school enrolled in a bilingual education program at that school?

☒ Yes ☐ No

3. Do the students at these schools attend a bilingual education program at another location?

☐ Yes ☒ No

4. Would the school be required to provide a bilingual education program, but the school has waived out of this requirement under 19 TAC §89.1205(g)?

☐ Yes ☒ No ☐ N/A

5. If the answer is yes to question 1, 2, 3, or 4, public notices in an alternative language are required. Which language is required by the bilingual program? Spanish

- f. Plain Language Summary Template – Complete the Plain Language Summary (TCEQ Form 20972) and include as an attachment. Attachment: C

- g. Complete one Public Involvement Plan (PIP) Form (TCEQ Form 20960) for each application for a new permit or major amendment and include as an attachment. Attachment: N/A

Item 10. Regulated Entity and Permitted Site Information (Instructions Page 29)

- a. TCEQ issued Regulated Entity Number (RN), if available: RN100212909

Note: If your business site is part of a larger business site, a Regulated Entity Number (RN) may already be assigned for the larger site. Use the RN assigned for the larger site. Search the TCEQ's Central Registry to determine the RN or to see if the larger site may already be registered as a Regulated Entity. If the site is found, provide the assigned RN.

- b. Name of project or site (the name known by the community where located): Laredo Power Station

- c. Is the location address of the facility in the existing permit the same?

☒ Yes ☐ No ☐ N/A (new permit)

Note: If the facility is located in Bexar, Comal, Hays, Kinney, Medina, Travis, Uvalde, or Williamson County, additional information concerning protection of the Edwards Aquifer may be required.

- d. Owner of treatment facility:

Prefix: Mr. Full Name (Last/First Name): Gregg Tieken

or Organization Name: City Public Service Board

Mailing Address: 500 McCullough Avenue / MD: 231007/RT0601
Antonio, TX 78215

City/State/Zip: San

Phone No: 210-353-2158

Email: Grtieken@cpsenergy.com

e. Ownership of facility: ☐ Public ☒ Private ☐ Both ☐ Federal

f. Owner of land where treatment facility is or will be:

Prefix: Full Name (Last/First Name):

or Organization Name: City Public Service Board

Mailing Address: 500 McCullough Avenue / MD: 231007/RT0601
Antonio, TX 78215

City/State/Zip: San

Phone No: 210-353-2158

Email: Grtieken@cpsenergy.com

Note: If not the same as the facility owner, attach a long-term lease agreement in effect for at least six years (In some cases, a lease may not suffice - see instructions). Attachment: N/A

g. Owner of effluent TLAP disposal site (if applicable): N/A

Prefix: Full Name (Last/First Name):

or Organization Name:

Mailing Address: City/State/Zip:

Phone No:

Email:

Note: If not the same as the facility owner, attach a long-term lease agreement in effect for at least six years. Attachment:

h. Owner of sewage sludge disposal site (if applicable):

Prefix: Full Name (Last/First Name):

or Organization Name:

Mailing Address: City/State/Zip:

Phone No:

Email:

Note: If not the same as the facility owner, attach a long-term lease agreement in effect for at least six years. Attachment:

Item 11. TDPES Discharge/TLAP Disposal Information (Instructions, Page 31)

a. Is the facility located on or does the treated effluent cross Native American Land?

☐ Yes ☒ No

b. Attach an original full size USGS Topographic Map (or an 8.5"×11" reproduced portion for renewal or amendment applications) with all required information. Check the box next to each item below to confirm it has been included on the map.

☒ One-mile radius

☐ Three-miles downstream information

☒ Applicant's property boundaries

☒ Treatment facility boundaries

☒ Labeled point(s) of discharge

☒ Highlighted discharge route(s)

- ☐ Effluent disposal site boundaries ☐ All wastewater ponds
☐ Sewage sludge disposal site ☐ New and future construction

Attachment: Figure 1

- c. Is the location of the sewage sludge disposal site in the existing permit accurate?

☐ Yes ☐ No or New Permit

If no, or a new application, provide an accurate location description: N/A

- d. Are the point(s) of discharge in the existing permit correct?

☒ Yes ☐ No or New Permit

If no, or a new application, provide an accurate location description:

- e. Are the discharge route(s) in the existing permit correct?

☒ Yes ☐ No or New Permit

If no, or a new permit, provide an accurate description of the discharge route:

- f. City nearest the outfall(s): Laredo

- g. County in which the outfalls(s) is/are located: Webb

- h. Is or will the treated wastewater discharge to a city, county, or state highway right-of-way, or a flood control district drainage ditch?

☐ Yes ☒ No

If yes, indicate by a check mark if: ☐ Authorization granted ☐ Authorization pending

For new and amendment applications, attach copies of letters that show proof of contact and provide the approval letter upon receipt. Attachment: N/A

For all applications involving an average daily discharge of 5 MGD or more, provide the names of all counties located within 100 statute miles downstream of the point(s) of discharge: N/A

- i. For TLAPs, is the location of the effluent disposal site in the existing permit accurate?

☐ Yes ☐ No or New Permit ☐ N/A

If no, or a new application, provide an accurate location description: N/A

- j. City nearest the disposal site: N/A

- k. County in which the disposal site is located: N/A

- l. For TLAPs, describe how effluent is/will be routed from the treatment facility to the disposal site: N/A

- m. For TLAPs, identify the nearest watercourse to the disposal site to which rainfall runoff might flow if not contained: N/A

Item 12. Miscellaneous Information (Instructions, Page 33)

- a. Did any person formerly employed by the TCEQ represent your company and get paid for service regarding this application?

☒ Yes ☐ No

If yes, list each person: Hailey Jett Cofty

- b. Do you owe any fees to the TCEQ?

☐ Yes ☒ No

If yes, provide the following information:

Account no.:

Total amount due:

- c. Do you owe any penalties to the TCEQ?

☐ Yes ☒ No

If yes, provide the following information:

Enforcement order no.:

Amount due:

Item 13. Signature Page (Instructions, Page 33)

Permit No: WQ0001200000

Applicant Name: City Public Service Board

Certification: I, Gregg Tieken, certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

I further certify that I am authorized under 30 Texas Administrative Code §305.44 to sign and submit this document and can provide documentation in proof of such authorization upon request.

Signatory name (typed or printed): Gregg Tieken


Signatory title: Director Environmental Planning and Compliance

Signature:  Date: July 4, 2025
(Use blue ink)

Subscribed and Sworn to before me by the said Gregg Tieken
on this 3 day of July, 20 25.
My commission expires on the 18 day of May, 20 26.

Eileen N Heaney
Notary Public

Bexar
County, Texas



[SEAL]

Note: If co-applicants are necessary, each entity must submit an original, separate signature page.

INDUSTRIAL WASTEWATER PERMIT APPLICATION

SUPPLEMENTAL PERMIT INFORMATION FORM (SPIF)

This form applies to TPDES permit applications only. Complete and attach the Supplemental Permit information Form (SPIF) (TCEQ Form 20971).

Attachment: D

TECHNICAL REPORT 1.0



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

INDUSTRIAL WASTEWATER PERMIT APPLICATION

TECHNICAL REPORT 1.0

The following information **is required** for all applications for a TLAP or an individual TPDES discharge permit.

For **additional information** or clarification on the requested information, please refer to the [Instructions for Completing the Industrial Wastewater Permit Application](#)¹ available on the TCEQ website. Please contact the Industrial Permits Team at 512-239-4671 with any questions about this form.

If more than one outfall is included in the application, provide applicable information for each individual outfall. **If an item does not apply to the facility, enter N/A** to indicate that the item has been considered. Include separate reports or additional sheets as **clearly cross-referenced attachments** and provide the attachment number in the space provided for the item the attachment addresses.

NOTE: This application is for an industrial wastewater permit only. Additional authorizations from the TCEQ Waste Permits Division or the TCEQ Air Permits Division may be needed.

Item 1. Facility/Site Information (Instructions, Page 39)

- a. Describe the general nature of the business and type(s) of industrial and commercial activities. Include all applicable SIC codes (up to 4).

Laredo Power Station (LPS) is a natural gas-fired electric power generation facility (SIC 4911). LPS operates two natural gas-fired combustion turbines (Units 4 and 5) which are operated in simple cycle mode. The combined nominal generating capacity of the simple cycle operation is approximately 177 megawatts (MW).

- b. Describe all wastewater-generating processes at the facility.

Wastewater generated on-site includes cooling tower blowdown, low volume wastes, storm water run-off, and chemical metal cleaning wastes. The discharge from LPS primarily consists of cooling tower blowdown water which requires minimal to no treatment. Chemical metal cleaning waste is intermittently discharged from internal Outfall 101 which subsequently discharges through Outfall 001. Cooling tower blowdown, low volume waste, stormwater runoff, and previously monitored chemical metal cleaning waste is discharged via Outfall 001 directly to the Rio Grande Below Amistad Reservoir in Segment No. 2304. Sanitary sewage generated on-site is disposed of at the City of Laredo Zacate Creek WWTP.

¹
https://www.tceq.texas.gov/permitting/wastewater/industrial/TPDES_industrial_wastewater_steps.html

- c. Provide a list of raw materials, major intermediates, and final products handled at the facility.

Materials List

Raw Materials	Intermediate Products	Final Products
See Attachment E	N/A	N/A

Attachment: E

- d. Attach a facility map (drawn to scale) with the following information:

- Production areas, maintenance areas, materials-handling areas, waste-disposal areas, and water intake structures.
- The location of each unit of the WWTP including the location of wastewater collection sumps, impoundments, outfalls, and sampling points, if significantly different from outfall locations.

Attachment: Figure 2

- e. Is this a new permit application for an existing facility?

☐ Yes ☒ No

If **yes**, provide background discussion: N/A

- f. Is/will the treatment facility/disposal site be located above the 100-year frequency flood level.

☒ Yes ☐ No

List source(s) used to determine 100-year frequency flood plain: Flood Insurance Rate Map: Webb County, TX; Map ID No. 48479C1185C, effective April 2, 2008 (Updated versions from 2010, 2013, 2022, and 2024 were also reviewed; however, revisions were not made to the flood plain designation at the facility location.)

If **no**, provide the elevation of the 100-year frequency flood plain and describe what protective measures are used/proposed to prevent flooding (including tail water and rainfall run-on controls) of the treatment facility and disposal area:

Attachment:

- g. For **new** or **major amendment** permit applications, will any construction operations result in a discharge of fill material into a water in the state?

☐ Yes ☐ No ☒ N/A (renewal only)

- h. If **yes** to Item 1.g, has the applicant applied for a USACE CWA Chapter 404 Dredge and Fill permit?

☐ Yes ☐ No

If **yes**, provide the permit number:

If **no**, provide an approximate date of application submittal to the USACE:

Item 2. Treatment System (Instructions, Page 40)

- a. List any physical, chemical, or biological treatment process(es) used/proposed to treat wastewater at this facility. Include a description of each treatment process, starting with initial treatment and finishing with the outfall/point of disposal.

See Figure 3 – Process Flow Diagram

- b. Attach a flow schematic **with a water balance** showing all sources of water and wastewater flow into the facility, wastewater flow into and from each treatment unit, and wastewater flow to each outfall/point of disposal.

Attachment: Figure 3

Item 3. Impoundments (Instructions, Page 40)

Does the facility use or plan to use any wastewater impoundments (e.g., lagoons or ponds?)

☒ Yes ☐ No

If **no**, proceed to Item 4. If **yes**, complete **Item 3.a** for **existing** impoundments and **Items 3.a - 3.e** for **new or proposed** impoundments. **NOTE:** See instructions, Pages 40-42, for additional information on the attachments required by Items 3.a – 3.e.

- a. Complete the table with the following information for each existing, new, or proposed impoundment. Attach additional copies of the Impoundment Information table, if needed.

Use Designation: Indicate the use designation for each impoundment as Treatment (T), Disposal (D), Containment (C), or Evaporation (E).

Associated Outfall Number: Provide an outfall number if a discharge occurs or will occur.

Liner Type: Indicate the liner type as Compacted clay liner (C), In-situ clay liner (I), Synthetic/plastic/rubber liner (S), or Alternate liner (A). **NOTE:** See instructions for further detail on liner specifications. If an alternate liner (A) is selected, include an attachment that provides a description of the alternate liner and any additional technical information necessary for an evaluation.

Leak Detection System: If any leak detection systems are in place/planned, enter Y for yes. Otherwise, enter N for no.

Groundwater Monitoring Wells and Data: If groundwater monitoring wells are in place/planned, enter Y for yes. Otherwise, enter N for no. Attach any existing groundwater monitoring data.

Dimensions: Provide the dimensions, freeboard, surface area, storage capacity of the impoundments, and the maximum depth (not including freeboard). For impoundments with irregular shapes, submit surface area instead of length and width.

Compliance with 40 CFR Part 257, Subpart D: If the impoundment is required to be in compliance with 40 CFR Part 257, Subpart D, enter Y for yes. Otherwise, enter N for no.

Date of Construction: Enter the date construction of the impoundment commenced (mm/dd/yy).

Impoundment Information

Parameter	Pond #
Use Designation: (T) (D) (C) or (E)	Supplied water reservoir (cooling water makeup which includes low volume wastestreams generated onsite. See Figure 3)
Associated Outfall Number	001
Liner Type (C) (I) (S) or (A)	S
Alt. Liner Attachment Reference	N/A
Leak Detection System, Y/N	N
Groundwater Monitoring Wells, Y/N	N
Groundwater Monitoring Data Attachment	N/A
Pond Bottom Located Above The Seasonal High-Water Table, Y/N	Y
Length (ft)	395
Width (ft)	350
Max Depth From Water Surface (ft), Not Including Freeboard	36.66
Freeboard (ft)	2
Surface Area (acres)	3.25
Storage Capacity (gallons)	37,913,105.45

Parameter	Pond #
40 CFR Part 257, Subpart D, Y/N	N
Date of Construction	1950

Attachment: [Click to enter text.](#)

The following information (**Items 3.b – 3.e**) is required only for **new or proposed** impoundments.

- b. For new or proposed impoundments, attach any available information on the following items. If attached, check **yes** in the appropriate box. Otherwise, check **no** or **not yet designed**.

1. Liner data

☐ Yes ☐ No ☐ Not yet designed

2. Leak detection system or groundwater monitoring data

☐ Yes ☐ No ☐ Not yet designed

3. Groundwater impacts

☐ Yes ☐ No ☐ Not yet designed

NOTE: Item b.3 is required if the bottom of the pond is not above the seasonal high-water table in the shallowest water-bearing zone.

Attachment: [Click to enter text.](#)

For TLAP applications: Items 3.c – 3.e are not required, continue to Item 4.

- c. Attach a USGS map or a color copy of original quality and scale which accurately locates and identifies all known water supply wells and monitor wells within ½-mile of the impoundments.

Attachment: N/A

- d. Attach copies of State Water Well Reports (e.g., driller's logs, completion data, etc.), and data on depths to groundwater for all known water supply wells including a description of how the depths to groundwater were obtained.

Attachment: N/A

- e. Attach information pertaining to the groundwater, soils, geology, pond liner, etc. used to assess the potential for migration of wastes from the impoundments or the potential for contamination of groundwater or surface water.

Attachment: N/A

Item 4. Outfall/Disposal Method Information (Instructions, Page 42)

Complete the following tables to describe the location and wastewater discharge or disposal operations for each outfall for discharge, and for each point of disposal for TLAP operations.

If there are more outfalls/points of disposal at the facility than the spaces provided, copies of pages 6 and/or numbered accordingly (i.e., page 6a, 6b, etc.) may be used to provide information on the additional outfalls.

For TLAP applications: Indicate the disposal method and each individual irrigation area **I**, evaporation pond **E**, or subsurface drainage system **S** by providing the appropriate letter designation for the disposal method followed by a numerical designation for each disposal area in the space provided for **Outfall** number (e.g. **E1** for evaporation pond 1, **I2** for irrigation area No. 2, etc.).

Outfall Longitude and Latitude

Outfall No.	Latitude (Decimal Degrees)	Longitude (Decimal Degrees)
001	27.5654	-99.51056
101	27.5664	-99.5088

Outfall Location Description

Outfall No.	Location Description
001	Discharge pipe on river bank southwest of plant
101	Manhole on southwest side of plant

Description of Sampling Point(s) (if different from Outfall location)

Outfall No.	Description of sampling point
001	N/A
101	N/A

Outfall Flow Information – Permitted and Proposed

Outfall No.	Permitted Daily Avg Flow (MGD)	Permitted Daily Max Flow (MGD)	Proposed Daily Avg Flow (MGD)	Proposed Daily Max Flow (MGD)	Anticipated Discharge Date (mm/dd/yy)
001	1.3	2.00	-	-	-
101	Variable	Variable	-	-	-

Outfall Discharge – Method and Measurement

Outfall No.	Pumped Discharge? Y/N	Gravity Discharge? Y/N	Type of Flow Measurement Device Used
001	N	Y	V-notch Weir
101	N	Y	Estimate

Outfall Discharge – Flow Characteristics

Outfall No.	Intermittent Discharge? Y/N	Continuous Discharge? Y/N	Seasonal Discharge? Y/N	Discharge Duration (hrs/day)	Discharge Duration (days/mo)	Discharge Duration (mo/yr)
001	N	Y	N	24	31	12
101	Y	N	N	Variable	Variable	Variable

Outfall Wastestream Contributions**Outfall No. 001**

Contributing Wastestream	Volume (MGD)	Percent (%) of Total Flow
Cooling tower blowdown	0.725	90
Low volume wastewater	0.24	<8
Stormwater	0.06	<2
101 – chemical metal cleaning waste	0.005	<1

Outfall No. 101

Contributing Wastestream	Volume (MGD)	Percent (%) of Total Flow
Chemical metal cleaning waste	Variable	100% of flow at Internal Outfall 101; <1% of total flow at Outfall 001

Outfall No. Click to enter text.

Contributing Wastestream	Volume (MGD)	Percent (%) of Total Flow

Attachment: Click to enter text.

Item 5. Blowdown and Once-Through Cooling Water Discharges (Instructions, Page 43)

a. Indicate if the facility currently or proposes to:

- ☒ Yes ☐ No Use cooling towers that discharge blowdown or other wastestreams
- ☐ Yes ☒ No Use boilers that discharge blowdown or other wastestreams
- ☐ Yes ☒ No Discharge once-through cooling water

NOTE: If the facility uses or plans to use cooling towers or once-through cooling water, Item 12 **is required**.

b. If **yes** to any of the above, attach an SDS with the following information for each chemical additive.

- Manufacturers Product Identification Number
- Product use (e.g., biocide, fungicide, corrosion inhibitor, etc.)
- Chemical composition including CASRN for each ingredient
- Classify product as non-persistent, persistent, or bioaccumulative
- Product or active ingredient half-life
- Frequency of product use (e.g., 2 hours/day once every two weeks)
- Product toxicity data specific to fish and aquatic invertebrate organisms
- Concentration of whole product or active ingredient, as appropriate, in wastestream.

In addition to each SDS, attach a summary of the above information for each specific wastestream and the associated chemical additives. Specify which outfalls are affected.

Attachment: E

c. Cooling Towers and Boilers

If the facility currently or proposes to use cooling towers or boilers that discharge blowdown or other wastestreams to the outfall(s), complete the following table.

Cooling Towers and Boilers

Type of Unit	Number of Units	Daily Avg Blowdown (gallons/day)	Daily Max Blowdown (gallons/day)
Cooling Towers	1	384,000	725,000
Boilers	0	0	0

Item 6. Stormwater Management (Instructions, Page 44)

Will any existing/proposed outfalls discharge stormwater associated with industrial activities, as defined at 40 CFR § 122.26(b)(14), commingled with any other wastestream?

- ☒ Yes ☐ No

If **yes**, briefly describe the industrial processes and activities that occur outdoors or in a manner which may result in exposure of the activities or materials to stormwater: Outdoor storage areas onsite include water treatment chemicals, acid storage, clean/dirty turbine oil tanks, scrap metal, oil containing electrical equipment, and aqueous ammonia tank and piping components.

Item 7. Domestic Sewage, Sewage Sludge, and Septage Management and Disposal (Instructions, Page 44)

Domestic Sewage - Waste and wastewater from humans or household operations that is discharged to a wastewater collection system or otherwise enters a treatment works.

- a. Check the box next to the appropriate method of domestic sewage and domestic sewage sludge treatment or disposal. Complete Worksheet 5.0 or Item 7.b if directed to do so.
- ☒ Domestic sewage is routed (i.e., connected to or transported to) to a WWTP permitted to receive domestic sewage for treatment, disposal, or both. Complete Item 7.b.
 - ☐ Domestic sewage disposed of by an on-site septic tank and drainfield system. Complete Item 7.b.
 - ☐ Domestic and industrial treatment sludge ARE commingled prior to use or disposal.
 - ☐ Industrial wastewater and domestic sewage are treated separately, and the respective sludge IS NOT commingled prior to sludge use or disposal. Complete Worksheet 5.0.
 - ☐ Facility is a POTW. Complete Worksheet 5.0.
 - ☐ Domestic sewage is not generated on-site.
 - ☐ Other (e.g., portable toilets), specify and Complete Item 7.b: [Click to enter text.](#)
- b. Provide the name and TCEQ, NPDES, or TPDES Permit No. of the waste-disposal facility which receives the domestic sewage/septage. If hauled by motorized vehicle, provide the name and TCEQ Registration No. of the hauler.

Domestic Sewage Plant/Hauler Name

Plant/Hauler Name	Permit/Registration No.
City of Laredo Zacate Creek WWTP	WQ0010681002

Item 8. Improvements or Compliance/Enforcement Requirements (Instructions, Page 45)

- a. Is the permittee currently required to meet any implementation schedule for compliance or enforcement?
- ☐ Yes ☒ No
- b. Has the permittee completed or planned for any improvements or construction projects?
- ☐ Yes ☒ No
- c. If **yes** to either 8.a or 8.b, provide a brief summary of the requirements and a status update: N/A

Item 9. Toxicity Testing (Instructions, Page 45)

Have any biological tests for acute or chronic toxicity been made on any of the discharges or on a receiving water in relation to the discharge within the last three years?

☐ Yes ☒ No

If **yes**, identify the tests and describe their purposes: N/A

Additionally, attach a copy of all tests performed which **have not** been submitted to the TCEQ or EPA. **Attachment:** N/A

Item 10. Off-Site/Third Party Wastes (Instructions, Page 45)

a. Does or will the facility receive wastes from off-site sources for treatment at the facility, disposal on-site via land application, or discharge via a permitted outfall?

☐ Yes ☒ No

If **yes**, provide responses to Items 10.b through 10.d below.

If **no**, proceed to Item 11.

b. Attach the following information to the application:

- List of wastes received (including volumes, characterization, and capability with on-site wastes).
- Identify the sources of wastes received (including the legal name and addresses of the generators).
- Description of the relationship of waste source(s) with the facility's activities.

Attachment: [Click to enter text.](#)

c. Is or will wastewater from another TCEQ, NPDES, or TPDES permitted facility commingled with this facility's wastewater after final treatment and prior to discharge via the final outfall/point of disposal?

☐ Yes ☐ No

If **yes**, provide the name, address, and TCEQ, NPDES, or TPDES permit number of the contributing facility and a copy of any agreements or contracts relating to this activity.

Attachment: [Click to enter text.](#)

d. Is this facility a POTW that accepts/will accept process wastewater from any SIU and has/is required to have an approved pretreatment program under the NPDES/TPDES program?

☐ Yes ☐ No

If **yes**, **Worksheet 6.0** of this application **is required**.

Item 11. Radioactive Materials (Instructions, Page 46)

a. Are/will radioactive materials be mined, used, stored, or processed at this facility?

☐ Yes ☒ No

If **yes**, use the following table to provide the results of one analysis of the effluent for all radioactive materials that may be present. Provide results in pCi/L.

Radioactive Materials Mined, Used, Stored, or Processed

Radioactive Material Name	Concentration (pCi/L)

- b. Does the applicant or anyone at the facility have any knowledge or reason to believe that radioactive materials may be present in the discharge, including naturally occurring radioactive materials in the source waters or on the facility property?

☐ Yes ☐ No

If **yes**, use the following table to provide the results of one analysis of the effluent for all radioactive materials that may be present. Provide results in pCi/L. Do not include information provided in response to Item 11.a.

Radioactive Materials Present in the Discharge

Radioactive Material Name	Concentration (pCi/L)

Item 12. Cooling Water (Instructions, Page 46)

- a. Does the facility use or propose to use water for cooling purposes?

☒ Yes ☐ No

If **no**, stop here. If **yes**, complete Items 12.b thru 12.f.

- b. Cooling water is/will be obtained from a groundwater source (e.g., on-site well).

☐ Yes ☒ No

If **yes**, stop here. If **no**, continue.

- c. Cooling Water Supplier

1. Provide the name of the owner(s) and operator(s) for the CWIS that supplies or will supply water for cooling purposes to the facility.

Cooling Water Intake Structure(s) Owner(s) and Operator(s)

CWIS ID	CWIS001		
Owner	City Public Service Board		
Operator	City Public Service Board		

2. Cooling water is/will be obtained from a Public Water Supplier (PWS)

☐ Yes ☒ No

If **no**, continue. If **yes**, provide the PWS Registration No. and stop here: PWS No. N/A

3. Cooling water is/will be obtained from a reclaimed water source?

☐ Yes ☒ No

If **no**, continue. If **yes**, provide the Reuse Authorization No. and stop here: N/A

4. Cooling water is/will be obtained from an Independent Supplier

☐ Yes ☒ No

If **no**, proceed to Item 12.d. If **yes**, provide the actual intake flow of the Independent Supplier's CWIS that is/will be used to provide water for cooling purposes and proceed: N/A

d. 316(b) General Criteria

1. The CWIS(s) used to provide water for cooling purposes to the facility has or will have a cumulative design intake flow of 2 MGD or greater.

☐ Yes ☒ No

2. At least 25% of the total water withdrawn by the CWIS is/will be used at the facility exclusively for cooling purposes on an annual average basis.

☒ Yes ☐ No

3. The CWIS(s) withdraw(s)/propose(s) to withdraw water for cooling purposes from surface waters that meet the definition of Waters of the United States in *40 CFR § 122.2*.

☒ Yes ☐ No

If **no**, provide an explanation of how the waterbody does not meet the definition of Waters of the United States in *40 CFR § 122.2*: N/A

If **yes** to all three questions in Item 12.d, the facility **meets** the minimum criteria to be subject to the full requirements of Section 316(b) of the CWA. Proceed to **Item 12.f**.

If **no** to any of the questions in Item 12.d, the facility **does not meet** the minimum criteria to be subject to the full requirements of Section 316(b) of the CWA; however, a determination is required based upon BPJ. Proceed to **Item 12.e**.

e. The facility does not meet the minimum requirements to be subject to the fill requirements of Section 316(b) **and uses/proposes to use cooling towers**.

☒ Yes ☐ No

If **yes**, stop here. If **no**, complete Worksheet 11.0, Items 1.a, 1.b.1-3 and 6, 2.b.1, and 3.a to allow for a determination based upon BPJ.

f. Oil and Gas Exploration and Production

1. The facility is subject to requirements at 40 CFR Part 435, Subparts A or D.

☐ Yes ☐ No

If **yes**, continue. If **no**, skip to Item 12.g.

2. The facility is an existing facility as defined at 40 CFR § 125.92(k) or a new unit at an existing facility as defined at 40 CFR § 125.92(u).

☐ Yes ☐ No

If **yes**, complete Worksheet 11.0, Items 1.a, 1.b.1-3 and 6, 2.b.1, and 3.a to allow for a determination based upon BPJ. If **no**, skip to Item 12.g.3.

g. Compliance Phase and Track Selection

1. Phase I – New facility subject to 40 CFR Part 125, Subpart I

☐ Yes ☐ No

If **yes**, check the box next to the compliance track selection, attach the requested information, and complete Worksheet 11.0, Items 2 and 3, and Worksheet 11.2.

☐ Track I – AIF greater than 2 MGD, but less than 10 MGD

- Attach information required by 40 CFR §§ 125.86(b)(2)-(4).

☐ Track I – AIF greater than 10 MGD

- Attach information required by 40 CFR § 125.86(b).

☐ Track II

- Attach information required by 40 CFR § 125.86(c).

Attachment: [Click to enter text.](#)

2. Phase II – Existing facility subject to 40 CFR Part 125, Subpart J

☐ Yes ☐ No

If **yes**, complete Worksheets 11.0 through 11.3, as applicable.

3. Phase III – New facility subject to 40 CFR Part 125, Subpart N

☐ Yes ☐ No

If **yes**, check the box next to the compliance track selection and provide the requested information.

☐ Track I – Fixed facility

- Attach information required by 40 CFR § 125.136(b) and complete Worksheet 11.0, Items 2 and 3, and Worksheet 11.2.

☐ Track I – Not a fixed facility

- Attach information required by 40 CFR § 125.136(b) and complete Worksheet 11.0, Item 2 (except CWIS latitude/longitude under Item 2.a).

☐ Track II – Fixed facility

- Attach information required by 40 CFR § 125.136(c) and complete Worksheet 11.0, Items 2 and 3.

Attachment: [Click to enter text.](#)

Item 13. Permit Change Requests (Instructions, Page 48)

This item is only applicable to existing permitted facilities.

a. Is the facility requesting a **major amendment** of an existing permit?

☐ Yes ☒ No

If **yes**, list each request individually and provide the following information: 1) detailed information regarding the scope of each request and 2) a justification for each request. Attach any supplemental information or additional data to support each request.

N/A

b. Is the facility requesting any **minor amendments** to the permit?

☐ Yes ☒ No

If **yes**, list and describe each change individually.

N/A

c. Is the facility requesting any **minor modifications** to the permit?

☐ Yes ☒ No

If **yes**, list and describe each change individually.

N/A

Item 14. Laboratory Accreditation (Instructions, Page 49)

All laboratory tests performed must meet the requirements of *30 TAC Chapter 25, Environmental Testing Laboratory Accreditation and Certification*, which includes the following general exemptions from National Environmental Laboratory Accreditation Program (NELAP) certification requirements:

- The laboratory is an in-house laboratory and is:
 - periodically inspected by the TCEQ; or
 - located in another state and is accredited or inspected by that state; or
 - performing work for another company with a unit located in the same site; or
 - performing pro bono work for a governmental agency or charitable organization.
- The laboratory is accredited under federal law.
- The data are needed for emergency-response activities, and a laboratory accredited under the Texas Laboratory Accreditation Program is not available.
- The laboratory supplies data for which the TCEQ does not offer accreditation.

The applicant should review *30 TAC Chapter 25* for specific requirements.

The following certification statement shall be signed and submitted with every application. See the *Signature Page* section in the Instructions, for a list of designated representatives who may sign the certification.

CERTIFICATION:

I certify that all laboratory tests submitted with this application meet the requirements of *30 TAC Chapter 25, Environmental Testing Laboratory Accreditation and Certification*.

Printed Name: Gregg Tieken

Title: Director Environmental Planning and Compliance

Signature: 

Date: July 3, 2025

TECHNICAL REPORT WORKSHEET 1.0 EPA EFFLUENT CATEGORICAL GUIDELINES

INDUSTRIAL WASTEWATER PERMIT APPLICATION

WORKSHEET 1.0: EPA CATEGORICAL EFFLUENT GUIDELINES

This worksheet **is required** for all applications for TPDES permits for discharges of wastewaters subject to EPA categorical effluent limitation guidelines (ELGs).

Item 1. Categorical Industries (Instructions, Page 53)

Is this facility subject to any 40 CFR categorical ELGs outlined on page 53 of the instructions?

☒ Yes ☐ No

If **no**, this worksheet is not required. If **yes**, provide the appropriate information below.

40 CFR Effluent Guideline

Industry	40 CFR Part
Steam Electric Power Generating	423

Item 2. Production/Process Data (Instructions, Page 54)

NOTE: For all TPDES permit applications requesting individual permit coverage for discharges of oil and gas exploration and production wastewater (discharges into or adjacent to water in the state, falling under the Oil and Gas Extraction Effluent Guidelines – 40 CFR Part 435), see Worksheet 12.0, Item 2 instead.

a. Production Data

Provide appropriate data for effluent guidelines with production-based effluent limitations.

Production Data

Subcategory	Actual Quantity/Day	Design Quantity/Day	Units
N/A	N/A	N/A	N/A

b. Organic Chemicals, Plastics, and Synthetic Fibers Manufacturing Data (40 CFR Part 414)

Provide each applicable subpart and the percent of total production. Provide data for metal-bearing and cyanide-bearing wastestreams, as required by *40 CFR Part 414, Appendices A and B*.

Percentage of Total Production

Subcategory	Percent of Total Production	Appendix A and B - Metals	Appendix A - Cyanide
N/A	N/A	N/A	N/A

c. Refineries (40 CFR Part 419)

Provide the applicable subcategory and a brief justification.

N/A

Item 3. Process/Non-Process Wastewater Flows (Instructions, Page 54)

Provide a breakdown of wastewater flow(s) generated by the facility, including both process and non-process wastewater flow(s). Specify which wastewater flows are to be authorized for discharge under this permit and the disposal practices for wastewater flows, excluding domestic, which are not to be authorized for discharge under this permit.

LPS withdraws water from the Rio Grande River to be used for cooling. This water, along with low volume waste, previously monitored metal cleaning waste (Internal Outfall 101), and stormwater, is discharged via Outfall 001 to the Rio Grande. See Figure 3.

Item 4. New Source Determination (Instructions, Page 54)

Provide a list of all wastewater-generating processes subject to EPA categorical ELGs, identify the appropriate guideline Part and Subpart, and provide the date the process/construction commenced.

Wastewater Generating Processes Subject to Effluent Guidelines

Process	EPA Guideline Part	EPA Guideline Subpart	Date Process/ Construction Commenced
Steam Electric Power Generating	40	423	June 1951

TECHNICAL REPORT WORKSHEET 2.0 POLLUTANT ANALYSES REQUIREMENT

INDUSTRIAL WASTEWATER PERMIT APPLICATION

WORKSHEET 2.0: POLLUTANT ANALYSIS

Worksheet 2.0 is **required** for all applications submitted for a TPDES permit. Worksheet 2.0 is not required for applications for a permit to dispose of all wastewater by land disposal or for discharges solely of stormwater associated with industrial activities.

Item 1. General Testing Requirements (Instructions, Page 55)

- Provide the date range of all sampling events conducted to obtain the analytical data submitted with this application (e.g., 05/01/2018-05/30/2018): 4/16/2025 – 5/7/2025
- ☒ Check the box to confirm all samples were collected no more than 12 months prior to the date of application submittal.
- Read the general testing requirements in the instructions for important information about sampling, test methods, and MALs. If a contact laboratory was used, attach a list which includes the name, contact information, and pollutants analyzed for each laboratory/firm.
Attachment: F

Item 2. Specific Testing Requirements (Instructions, Page 56)

Attach correspondence from TCEQ approving submittal of less than the required number of samples, if applicable. **Attachment:** N/A

TABLE 1 and TABLE 2 (Instructions, Page 58)

Completion of Tables 1 and 2 is required for all external outfalls for all TPDES permit applications.

Table 1 for Outfall No.: 001

Samples are (check one): ☒ Composite ☒ Grab

Pollutant	Sample 1 (mg/L)	Sample 2 (mg/L)	Sample 3 (mg/L)	Sample 4 (mg/L)
BOD (5-day)	3.93	2.98	3.03	3.28
CBOD (5-day)	3.23	2.59	2.74	2.22
Chemical oxygen demand	58	38	47	45
Total organic carbon	14.5	13.3	14.7	15.1
Dissolved oxygen	6.08	6.48	10.12	8.93
Ammonia nitrogen	<0.014	0.06	0.038	0.071
Total suspended solids	15.6	14.4	20.4	13.6
Nitrate nitrogen	0.412	0.402	0.407	0.414
Total organic nitrogen	1.87	1.41	1.68	1.95
Total phosphorus	2.34	2.45	2.37	0.688
Oil and grease	<1.67	<1.55	<1.61	<1.55
Total residual chlorine	0.05	0.03	0.05	0.05

Pollutant	Sample 1 (mg/L)	Sample 2 (mg/L)	Sample 3 (mg/L)	Sample 4 (mg/L)
Total dissolved solids	1630	1890	1880	1750
Sulfate	1070	878	962	943
Chloride	432	354	333	385
Fluoride	2.62	2.15	2.28	2.43
Total alkalinity (mg/L as CaCO3)	32	38	38	36
Temperature (°F)	69.98	76.88	77.54	69.98
pH (standard units)	6.60	7.35	7.77	7.05

Table 2 for Outfall No.: **001**

Samples are (check one): ☒ Composite ☒ Grab

Pollutant	Sample 1 (µg/L)	Sample 2 (µg/L)	Sample 3 (µg/L)	Sample 4 (µg/L)	MAL (µg/L)
Aluminum, total	154	58.6	52.3	96.2	2.5
Antimony, total	5.19	4.47	4.81	4.39	5
Arsenic, total	90	80.4	81.1	74.8	0.5
Barium, total	148	139	144	129	3
Beryllium, total	<0.06	<0.06	<0.06	<0.06	0.5
Cadmium, total	0.04	0.05	<0.03	<0.03	1
Chromium, total	5.25	3.99	3.41	3.23	3
Chromium, hexavalent	<0.5	0.8	0.6	3.23	3
Chromium, trivalent	5.25	3.19	2.81	5	N/A
Copper, total	81.2	53.6	40.2	28.3	2
Cyanide, available	<0.69	<0.69	<0.69	<0.69	2/10
Lead, total	0.89	0.89	0.73	0.8	0.5
Mercury, total	0.0058	0.0059	0.0038	0.0043	0.005/0.0005
Nickel, total	74.7	70.2	72.1	63.8	2
Selenium, total	1.13	0.80	0.78	1.12	5
Silver, total	<0.13	<0.13	<0.13	<0.13	0.5
Thallium, total	<0.06	<0.06	<0.06	<0.06	0.5
Zinc, total	29.6	30.2	28.8	21.3	5.0

TABLE 3 (Instructions, Page 58)

Completion of Table 3 is required for all **external outfalls** which discharge process wastewater.

Partial completion of Table 3 is required for all **external outfalls** which discharge non-process wastewater and stormwater associated with industrial activities commingled with other wastestreams (see instructions for additional guidance).

Table 3 for Outfall No.: **001**Samples are (check one): ☒ Composite ☒ Grab

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)*
Acrylonitrile	<3	<3	<3	<3	50
Anthracene	<0.18	<0.18	<0.18	<0.18	10
Benzene	<1	<1	<1	<1	10
Benidine	<0.33	<0.33	<0.33	<0.33	50
Benzo(a)anthracene	<0.19	<0.19	<0.19	<0.19	5
Benzo(a)pyrene	<0.43	<0.43	<0.43	<0.43	5
Bis(2-chloroethyl)ether	<0.36	<0.36	<0.36	<0.36	10
Bis(2-ethylhexyl)phthalate	6.82	<1.1	<1.1	<1.1	10
Bromodichloromethane [Dichlorobromomethane]	<1	<1	<1	<1	10
Bromoform	<1	<1	<1	<1	10
Carbon tetrachloride	<1	<1	<1	<1	2
Chlorobenzene	<1	<1	<1	<1	10
Chlorodibromomethane [Dibromochloromethane]	<1	<1	<1	<1	10
Chloroform	<1	<1	<1	<1	10
Chrysene	<0.29	<0.29	<0.29	<0.29	5
m-Cresol [3-Methylphenol]	<0.66	<0.66	<0.66	<0.66	10
o-Cresol [2-Methylphenol]	<0.5	<0.5	<0.5	<0.5	10
p-Cresol [4-Methylphenol]	<0.66	<0.66	<0.66	<0.66	10
1,2-Dibromoethane	<1	<1	<1	<1	10
m-Dichlorobenzene [1,3-Dichlorobenzene]	<1	<1	<1	<1	10
o-Dichlorobenzene [1,2-Dichlorobenzene]	<1	<1	<1	<1	10
p-Dichlorobenzene [1,4-Dichlorobenzene]	<1	<1	<1	<1	10
3,3'-Dichlorobenzidine	<0.44	<0.44	<0.44	<0.44	5
1,2-Dichloroethane	<1	<1	<1	<1	10

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)*
1,1-Dichloroethene [1,1-Dichloroethylene]	<1	<1	<1	<1	10
Dichloromethane [Methylene chloride]	<1	<1	<1	<1	20
1,2-Dichloropropane	<1	<1	<1	<1	10
1,3-Dichloropropene [1,3-Dichloropropylene]	<1	<1	<1	<1	10
2,4-Dimethylphenol	<0.27	<0.27	<0.27	<0.27	10
Di-n-Butyl phthalate	<0.61	<0.61	<0.61	<0.61	10
Ethylbenzene	<1	<1	<1	<1	10
Fluoride	2620	2150	2280	2430	500
Hexachlorobenzene	<0.35	<0.35	<0.35	<0.35	5
Hexachlorobutadiene	<0.21	<0.21	<0.21	<0.21	10
Hexachlorocyclopentadiene	<0.18	<0.18	<0.18	<0.18	10
Hexachloroethane	<0.24	<0.24	<0.24	<0.24	20
Methyl ethyl ketone	<1.0	<1.0	<1.0	<1.0	50
Nitrobenzene	<0.46	<0.46	<0.46	<0.46	10
N-Nitrosodiethylamine	<2.5	<2.5	<2.5	<2.5	20
N-Nitroso-di-n-butylamine	<2.5	<2.5	<2.5	<2.5	20
Nonylphenol	<12.5	<12.5	<2.5	<2.5	333
Pentachlorobenzene	<1.5	<1.5	<1.5	<1.5	20
Pentachlorophenol	<0.25	<0.25	<0.25	<0.25	5
Phenanthrene	<0.22	<0.22	<0.22	<0.22	10
Polychlorinated biphenyls (PCBs) (**)	<0.01	<0.01	<0.01	<0.01	0.2
Pyridine	<0.18	<0.18	<0.18	<0.18	20
1,2,4,5-Tetrachlorobenzene	<2.5	<2.5	<2.5	<2.5	20
1,1,2,2-Tetrachloroethane	<1	<1	<1	<1	10
Tetrachloroethene [Tetrachloroethylene]	<1	<1	<1	<1	10
Toluene	1.42	1.04	1.46	<1	10
1,1,1-Trichloroethane	<1	<1	<1	<1	10
1,1,2-Trichloroethane	<1	<1	<1	<1	10
Trichloroethene [Trichloroethylene]	<1	<1	<1	<1	10

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)*
2,4,5-Trichlorophenol	<0.43	<0.43	<0.43	<0.43	50
TTHM (Total trihalomethanes)	<1	<1	<1	<1	10
Vinyl chloride	<1	<1	<1	<1	10

(*) Indicate units if different from µg/L.

(**) Total of detects for PCB-1242, PCB-1254, PCB-1221, PCB-1232, PCB-1248, PCB-1260, and PCB-1016. If all non-detects, enter the highest non-detect preceded by a "<".

TABLE 4 (Instructions, Pages 58-59)

Partial completion of Table 4 **is required** for each **external outfall** based on the conditions below.

a. Tributyltin

Is this facility an industrial/commercial facility which currently or proposes to directly dispose of wastewater from the types of operations listed below or a domestic facility which currently or proposes to receive wastewater from the types of industrial/commercial operations listed below?

☐ Yes ☒ No

If **yes**, check the box next to each of the following criteria which apply and provide the appropriate testing results in Table 4 below (check all that apply).

- ☐ Manufacturers and formulators of tributyltin or related compounds.
- ☐ Painting of ships, boats and marine structures.
- ☐ Ship and boat building and repairing.
- ☐ Ship and boat cleaning, salvage, wrecking and scaling.
- ☐ Operation and maintenance of marine cargo handling facilities and marinas.
- ☐ Facilities engaged in wood preserving.
- ☐ Any other industrial/commercial facility for which tributyltin is known to be present, or for which there is any reason to believe that tributyltin may be present in the effluent.

b. Enterococci (discharge to saltwater)

This facility discharges/proposes to discharge directly into saltwater receiving waters **and** Enterococci bacteria are expected to be present in the discharge based on facility processes.

☐ Yes ☒ No

Domestic wastewater is/will be discharged.

☐ Yes ☒ No

If **yes to either** question, provide the appropriate testing results in Table 4 below.

c. **E. coli (discharge to freshwater)**

This facility discharges/proposes to discharge directly into freshwater receiving waters **and** *E. coli* bacteria are expected to be present in the discharge based on facility processes.

☐ Yes ☒ No

Domestic wastewater is/will be discharged.

☐ Yes ☒ No

If **yes to either** question, provide the appropriate testing results in Table 4 below.

Table 4 for Outfall No.: N/A

Samples are (check one): ☐ Composite ☐ Grab

Pollutant	Sample 1	Sample 2	Sample 3	Sample 4	MAL
Tributyltin (µg/L)					0.010
Enterococci (cfu or MPN/100 mL)					N/A
<i>E. coli</i> (cfu or MPN/100 mL)					N/A

TABLE 5 (Instructions, Page 59)

Completion of Table 5 **is required** for all **external outfalls** which discharge process wastewater from a facility which manufactures or formulates pesticides or herbicides or other wastewaters which may contain pesticides or herbicides.

If this facility does not/will not manufacture or formulate pesticides or herbicides and does not/will not discharge other wastewaters that may contain pesticides or herbicides, check N/A.

☒ N/A

Table 5 for Outfall No.: N/A

Samples are (check one): ☐ Composite ☐ Grab

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)*
Aldrin					0.01
Carbaryl					5
Chlordane					0.2
Chlorpyrifos					0.05
4,4'-DDD					0.1
4,4'-DDE					0.1
4,4'-DDT					0.02
2,4-D					0.7
Danitol [Fenpropathrin]					—
Demeton					0.20
Diazinon					0.5/0.1
Dicofol [Kelthane]					1
Dieldrin					0.02
Diuron					0.090

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)*
Endosulfan I (<i>alpha</i>)					0.01
Endosulfan II (<i>beta</i>)					0.02
Endosulfan sulfate					0.1
Endrin					0.02
Guthion [Azinphos methyl]					0.1
Heptachlor					0.01
Heptachlor epoxide					0.01
Hexachlorocyclohexane (<i>alpha</i>)					0.05
Hexachlorocyclohexane (<i>beta</i>)					0.05
Hexachlorocyclohexane (<i>gamma</i>) [Lindane]					0.05
Hexachlorophene					10
Malathion					0.1
Methoxychlor					2.0
Mirex					0.02
Parathion (ethyl)					0.1
Toxaphene					0.3
2,4,5-TP [Silvex]					0.3

* Indicate units if different from µg/L.

TABLE 6 (Instructions, Page 59)

Completion of Table 6 is required for all external outfalls.

Table 6 for Outfall No.: **001**

Samples are (check one): ☒ Composite ☒ Grab

Pollutants	Believed Present	Believed Absent	Sample 1 (mg/L)	Sample 2 (mg/L)	Sample 3 (mg/L)	Sample 4 (mg/L)	MAL (µg/L)*
Bromide	☒	☐	0.755	0.634	0.694	0.734	400
Color (PCU)	☒	☐	15				—
Nitrate-Nitrite (as N)	☒	☐	0.366	0.402	0.407	0.414	—
Sulfide (as S)	☒	☐	<0.01				—
Sulfite (as SO ₃)	☒	☐	<5.0				—
Surfactants	☒	☐	<0.05				—
Boron, total	☒	☐	0.597				20
Cobalt, total	☐	☒					0.3
Iron, total	☒	☐	0.826				7
Magnesium, total	☒	☐	70.8				20
Manganese, total	☐	☒					0.5
Molybdenum, total	☐	☒					1
Tin, total	☒	☐	<0.005				5
Titanium, total	☒	☐	<0.001				30

TABLE 7 (Instructions, Page 60)

Check the box next to any of the industrial categories applicable to this facility. If no categories are applicable, check N/A. If GC/MS testing is required, check the box provided to confirm the testing results for the appropriate parameters are provided with the application.

☐ N/A

Table 7 for Applicable Industrial Categories

Industrial Category	40 CFR Part	Volatiles Table 8	Acids Table 9	Bases/Neutrals Table 10	Pesticides Table 11
☐ Adhesives and Sealants		☐ Yes	☐ Yes	☐ Yes	No
☐ Aluminum Forming	467	☐ Yes	☐ Yes	☐ Yes	No
☐ Auto and Other Laundries		☐ Yes	☐ Yes	☐ Yes	☐ Yes
☐ Battery Manufacturing	461	☐ Yes	No	☐ Yes	No
☐ Coal Mining	434	No	No	No	No
☐ Coil Coating	465	☐ Yes	☐ Yes	☐ Yes	No
☐ Copper Forming	468	☐ Yes	☐ Yes	☐ Yes	No
☐ Electric and Electronic Components	469	☐ Yes	☐ Yes	☐ Yes	☐ Yes
☐ Electroplating	413	☐ Yes	☐ Yes	☐ Yes	No
☐ Explosives Manufacturing	457	No	☐ Yes	☐ Yes	No
☐ Foundries		☐ Yes	☐ Yes	☐ Yes	No
☐ Gum and Wood Chemicals - Subparts A,B,C,E	454	☐ Yes	☐ Yes	No	No
☐ Gum and Wood Chemicals - Subparts D,F	454	☐ Yes	☐ Yes	☐ Yes	No
☐ Inorganic Chemicals Manufacturing	415	☐ Yes	☐ Yes	☐ Yes	No
☐ Iron and Steel Manufacturing	420	☐ Yes	☐ Yes	☐ Yes	No
☐ Leather Tanning and Finishing	425	☐ Yes	☐ Yes	☐ Yes	No
☐ Mechanical Products Manufacturing		☐ Yes	☐ Yes	☐ Yes	No
☐ Nonferrous Metals Manufacturing	421,471	☐ Yes	☐ Yes	☐ Yes	☐ Yes
☐ Oil and Gas Extraction - Subparts A, D, E, F, G, H	435	☐ Yes	☐ Yes	☐ Yes	No
☐ Ore Mining - Subpart B	440	No	☐ Yes	No	No
☐ Organic Chemicals Manufacturing	414	☐ Yes	☐ Yes	☐ Yes	☐ Yes
☐ Paint and Ink Formulation	446,447	☐ Yes	☐ Yes	☐ Yes	No
☐ Pesticides	455	☐ Yes	☐ Yes	☐ Yes	☐ Yes
☐ Petroleum Refining	419	☐ Yes	No	No	No
☐ Pharmaceutical Preparations	439	☐ Yes	☐ Yes	☐ Yes	No
☐ Photographic Equipment and Supplies	459	☐ Yes	☐ Yes	☐ Yes	No
☐ Plastic and Synthetic Materials Manufacturing	414	☐ Yes	☐ Yes	☐ Yes	☐ Yes
☐ Plastic Processing	463	☐ Yes	No	No	No
☐ Porcelain Enameling	466	No	No	No	No
☐ Printing and Publishing		☐ Yes	☐ Yes	☐ Yes	☐ Yes
☐ Pulp and Paperboard Mills - Subpart C	430	☐ *	☐ Yes	☐ *	☐ Yes
☐ Pulp and Paperboard Mills - Subparts F, K	430	☐ *	☐ Yes	☐ *	☐ *
☐ Pulp and Paperboard Mills - Subparts A, B, D, G, H	430	☐ Yes	☐ Yes	☐ *	☐ *
☐ Pulp and Paperboard Mills - Subparts I, J, L	430	☐ Yes	☐ Yes	☐ *	☐ Yes
☐ Pulp and Paperboard Mills - Subpart E	430	☐ Yes	☐ Yes	☐ Yes	☐ *
☐ Rubber Processing	428	☐ Yes	☐ Yes	☐ Yes	No
☐ Soap and Detergent Manufacturing	417	☐ Yes	☐ Yes	☐ Yes	No
☒ Steam Electric Power Plants	423	☒ Yes	☒ Yes	No	No
☐ Textile Mills (Not Subpart C)	410	☐ Yes	☐ Yes	☐ Yes	No
☐ Timber Products Processing	429	☐ Yes	☐ Yes	☐ Yes	☐ Yes

* Test if believed present.

TABLES 8, 9, 10, and 11 (Instructions, Page 60)

Completion of Tables 8, 9, 10, and 11 **is required** as specified in Table 7 for all **external outfalls** that contain process wastewater.

Completion of Tables 8, 9, 10, and 11 **may be required** for types of industry not specified in Table 7 for specific parameters that are believed to be present in the wastewater.

Table 8 for Outfall No.: 001

Samples are (check one): ☒ Composite ☐ Grab

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)
Acrolein	<6	<6	<6	<6	50
Acrylonitrile	<1	<1	<1	<1	50
Benzene	<1	<1	<1	<1	10
Bromoform	<1	<1	<1	<1	10
Carbon tetrachloride	<1	<1	<1	<1	2
Chlorobenzene	<1	<1	<1	<1	10
Chlorodibromomethane	<1	<1	<1	<1	10
Chloroethane	<1	<1	<1	<1	50
2-Chloroethylvinyl ether	<6	<6	<6	<6	10
Chloroform	<1	<1	<1	<1	10
Dichlorobromomethane [Bromodichloromethane]	<1	<1	<1	<1	10
1,1-Dichloroethane	<1	<1	<1	<1	10
1,2-Dichloroethane	<1	<1	<1	<1	10
1,1-Dichloroethylene [1,1-Dichloroethene]	<1	<1	<1	<1	10
1,2-Dichloropropane	<1	<1	<1	<1	10
1,3-Dichloropropylene [1,3-Dichloropropene]	<1	<1	<1	<1	10
Ethylbenzene	<1	<1	<1	<1	10
Methyl bromide [Bromomethane]	<2	<2	<2	<2	50
Methyl chloride [Chloromethane]	<1	<1	<1	<1	50
Methylene chloride [Dichloromethane]	<1	<1	<1	<1	20
1,1,2,2-Tetrachloroethane	<1	<1	<1	<1	10
Tetrachloroethylene [Tetrachloroethene]	<1	<1	<1	<1	10
Toluene	1.42	1.04	1.46	<1	10
1,2-Trans-dichloroethylene [1,2-Trans-dichloroethene]	<1	<1	<1	<1	10

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)
1,1,1-Trichloroethane	<1	<1	<1	<1	10
1,1,2-Trichloroethane	<1	<1	<1	<1	10
Trichloroethylene [Trichloroethene]	<1	<1	<1	<1	10
Vinyl chloride	<1	<1	<1	<1	10

* Indicate units if different from µg/L.

Table 9 for Outfall No.: 001

Samples are (check one): ☒ Composite ☒ Grab

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)
2-Chlorophenol	<0.25	<0.25	<0.25	<0.25	10
2,4-Dichlorophenol	<0.35	<0.35	<0.35	<0.35	10
2,4-Dimethylphenol	<0.27	<0.27	<0.27	<0.27	10
4,6-Dinitro-o-cresol	<0.33	<0.33	<0.33	<0.33	50
2,4-Dinitrophenol	<0.71	<0.71	<0.71	<0.71	50
2-Nitrophenol	<0.44	<0.44	<0.44	<0.44	20
4-Nitrophenol	<0.57	<0.57	<0.57	<0.57	50
p-Chloro-m-cresol	<0.5	<0.5	<0.5	<0.5	10
Pentachlorophenol	<0.25	<0.25	<0.25	<0.25	5
Phenol	<0.22	<0.22	<0.22	<0.22	10
2,4,6-Trichlorophenol	<0.4	<0.4	<0.4	<0.4	10

* Indicate units if different from µg/L.

Table 10 for Outfall No.: N/A

Samples are (check one): ☐ Composite ☐ Grab

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)
Acenaphthene					10
Acenaphthylene					10
Anthracene					10
Benzidine					50
Benzo(a)anthracene					5
Benzo(a)pyrene					5
3,4-Benzofluoranthene [Benzo(b)fluoranthene]					10
Benzo(ghi)perylene					20
Benzo(k)fluoranthene					5
Bis(2-chloroethoxy)methane					10

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)
Bis(2-chloroethyl)ether					10
Bis(2-chloroisopropyl)ether					10
Bis(2-ethylhexyl)phthalate					10
4-Bromophenyl phenyl ether					10
Butylbenzyl phthalate					10
2-Chloronaphthalene					10
4-Chlorophenyl phenyl ether					10
Chrysene					5
Dibenzo(a,h)anthracene					5
1,2-Dichlorobenzene [o-Dichlorobenzene]					10
1,3-Dichlorobenzene [m-Dichlorobenzene]					10
1,4-Dichlorobenzene [p-Dichlorobenzene]					10
3,3'-Dichlorobenzidine					5
Diethyl phthalate					10
Dimethyl phthalate					10
Di-n-butyl phthalate					10
2,4-Dinitrotoluene					10
2,6-Dinitrotoluene					10
Di-n-octyl phthalate					10
1,2-Diphenylhydrazine (as Azobenzene)					20
Fluoranthene					10
Fluorene					10
Hexachlorobenzene					5
Hexachlorobutadiene					10
Hexachlorocyclopentadiene					10
Hexachloroethane					20
Indeno(1,2,3-cd)pyrene					5
Isophorone					10
Naphthalene					10
Nitrobenzene					10
N-Nitrosodimethylamine					50

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)
N-Nitrosodi-n-propylamine					20
N-Nitrosodiphenylamine					20
Phenanthrene					10
Pyrene					10
1,2,4-Trichlorobenzene					10

* Indicate units if different from µg/L.

Table 11 for Outfall No.: N/A

Samples are (check one): ☐ Composite ☐ Grab

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)
Aldrin					0.01
alpha-BHC [alpha-Hexachlorocyclohexane]					0.05
beta-BHC [beta-Hexachlorocyclohexane]					0.05
gamma-BHC [gamma-Hexachlorocyclohexane]					0.05
delta-BHC [delta-Hexachlorocyclohexane]					0.05
Chlordane					0.2
4,4'-DDT					0.02
4,4'-DDE					0.1
4,4'-DDD					0.1
Dieldrin					0.02
Endosulfan I (alpha)					0.01
Endosulfan II (beta)					0.02
Endosulfan sulfate					0.1
Endrin					0.02
Endrin aldehyde					0.1
Heptachlor					0.01
Heptachlor epoxide					0.01
PCB 1242					0.2
PCB 1254					0.2
PCB 1221					0.2
PCB 1232					0.2
PCB 1248					0.2

Pollutant	Sample 1 (µg/L)*	Sample 2 (µg/L)*	Sample 3 (µg/L)*	Sample 4 (µg/L)*	MAL (µg/L)
PCB 1260					0.2
PCB 1016					0.2
Toxaphene					0.3

* Indicate units if different from µg/L.

Attachment: [Click to enter text.](#)

TABLE 12 (DIOXINS/FURAN COMPOUNDS)

Complete of Table 12 **is required** for **external outfalls**, as directed below. (Instructions, Pages 59-60)

Indicate which compound(s) are manufactured or used at the facility and provide a brief description of the conditions of its/their presence at the facility (check all that apply).

- ☐ 2,4,5-trichlorophenoxy acetic acid (2,4,5-T) CASRN 93-76-5
- ☐ 2-(2,4,5-trichlorophenoxy) propanoic acid (Silvex, 2,4,5-TP) CASRN 93-72-1
- ☐ 2-(2,4,5-trichlorophenoxy) ethyl 2,2-dichloropropionate (Erbon) CASRN 136-25-4
- ☐ 0,0-dimethyl 0-(2,4,5-trichlorophenyl) phosphorothioate (Ronnell) CASRN 299-84-3
- ☐ 2,4,5-trichlorophenol (TCP) CASRN 95-95-4
- ☐ hexachlorophene (HCP) CASRN 70-30-4
- ☐ None of the above

Description: [Click to enter text.](#)

Does the applicant or anyone at the facility know or have any reason to believe that 2,3,7,8-tetrachlorodibenzo-p-dioxin (TCDD) or any congeners of TCDD may be present in the effluent proposed for discharge?

- ☐ Yes ☐ No

Description: [Click to enter text.](#)

If **yes** to either Items a **or** b, complete Table 12 as instructed.

Table 12 for Outfall No.: [Click to enter text.](#) Samples are (check one): ☐ Composite ☐ Grab

Compound	Toxicity Equivalent Factors	Wastewater Concentration (ppq)	Wastewater Toxicity Equivalents (ppq)	Sludge Concentration (ppt)	Sludge Toxicity Equivalents (ppt)	MAL (ppq)
2,3,7,8-TCDD	1					10
1,2,3,7,8-PeCDD	1.0					50
2,3,7,8-HxCDDs	0.1					50
1,2,3,4,6,7,8-HpCDD	0.01					50

Compound	Toxicity Equivalent Factors	Wastewater Concentration (ppq)	Wastewater Toxicity Equivalents (ppq)	Sludge Concentration (ppt)	Sludge Toxicity Equivalents (ppt)	MAL (ppq)
2,3,7,8-TCDF	0.1					10
1,2,3,7,8-PeCDF	0.03					50
2,3,4,7,8-PeCDF	0.3					50
2,3,7,8-HxCDFs	0.1					50
2,3,4,7,8-HpCDFs	0.01					50
OCDD	0.0003					100
OCDF	0.0003					100
PCB 77	0.0001					500
PCB 81	0.0003					500
PCB 126	0.1					500
PCB 169	0.03					500
Total						

TABLE 13 (HAZARDOUS SUBSTANCES)

Complete Table 13 **is required** for all **external outfalls** as directed below. (Instructions, Pages 60-61)

Are there any pollutants listed in the instructions (pages 55-62) believed present in the discharge?

☐ Yes ☒ No

Are there pollutants listed in Item 1.c. of Technical Report 1.0 which are believed present in the discharge and have not been analytically quantified elsewhere in this application?

☐ Yes ☒ No

If **yes** to either Items a or b, complete Table 13 as instructed.

Table 13 for Outfall No.: N/A

Samples are (check one): ☐ Composite ☐ Grab

Pollutant	CASRN	Sample 1 (µg/L)	Sample 2 (µg/L)	Sample 3 (µg/L)	Sample 4 (µg/L)	Analytical Method

TECHNICAL REPORT WORKSHEET 4.0

RECEIVING WATERS

INDUSTRIAL WASTEWATER PERMIT APPLICATION

WORKSHEET 4.0: RECEIVING WATERS

This worksheet is **required** for all TPDES permit applications.

Item 1. Domestic Drinking Water Supply (Instructions, Page 80)

- a. There is a surface water intake for domestic drinking water supply located within 5 (five) miles downstream from the point/proposed point of discharge.

☒ Yes ☐ No

If **no**, stop here and proceed to Item 2. If **yes**, provide the following information:

1. The legal name of the owner of the drinking water supply intake: City of Laredo
2. The distance and direction from the outfall to the drinking water supply intake: ~3 miles south

- b. Locate and identify the intake on the USGS 7.5-minute topographic map provided for Administrative Report 1.0.

☒ Check this box to confirm the above requested information is provided.

Item 2. Discharge Into Tidally Influenced Waters (Instructions, Page 80)

If the discharge is to tidally influenced waters, complete this section. Otherwise, proceed to Item 3.

- a. Width of the receiving water at the outfall: N/A feet

- b. Are there oyster reefs in the vicinity of the discharge?

☐ Yes ☐ No

If **yes**, provide the distance and direction from the outfall(s) to the oyster reefs: N/A

- c. Are there sea grasses within the vicinity of the point of discharge?

☐ Yes ☐ No

If **yes**, provide the distance and direction from the outfall(s) to the grasses: N/A

Item 3. Classified Segment (Instructions, Page 80)

The discharge is/will be directly into (or within 300 feet of) a classified segment.

☒ Yes ☐ No

If **yes**, stop here and do not complete Items 4 and 5 of this worksheet or Worksheet 4.1.

If **no**, complete Items 4 and 5 and Worksheet 4.1 may be required.

Item 4. Description of Immediate Receiving Waters (Instructions, Page 80)

- a. Name of the immediate receiving waters: N/A
- b. Check the appropriate description of the immediate receiving waters:
- ☐ Lake or Pond
 - Surface area (acres):
 - Average depth of the entire water body (feet):
 - Average depth of water body within a 500-foot radius of the discharge point (feet):
 - ☐ Man-Made Channel or Ditch
 - ☐ Stream or Creek
 - ☐ Freshwater Swamp or Marsh
 - ☐ Tidal Stream, Bayou, or Marsh
 - ☐ Open Bay
 - ☐ Other, specify:

If **Man-Made Channel or Ditch** or **Stream or Creek** were selected above, provide responses to Items 4.c – 4.g below:

- c. For **existing discharges**, check the description below that best characterizes the area **upstream** of the discharge.

For **new discharges**, check the description below that best characterizes the area **downstream** of the discharge.

- ☐ Intermittent (dry for at least one week during most years)
- ☐ Intermittent with Perennial Pools (enduring pools containing habitat to maintain aquatic life uses)
- ☐ Perennial (normally flowing)

Check the source(s) of the information used to characterize the area upstream (existing discharge) or downstream (new discharge):

- ☐ USGS flow records
- ☐ personal observation
- ☐ historical observation by adjacent landowner(s)
- ☐ other, specify:

- d. List the names of all perennial streams that join the receiving water within three miles downstream of the discharge point:
- e. The receiving water characteristics change within three miles downstream of the discharge (e.g., natural or man-made dams, ponds, reservoirs, etc.).

- ☐ Yes ☐ No

If **yes**, describe how:

f. General observations of the water body during normal dry weather conditions:

Date and time of observation:

g. The water body was influenced by stormwater runoff during observations.

☐ Yes ☐ No

If **yes**, describe how:

Item 5. General Characteristics of Water Body (Instructions, Page 81)

a. Is the receiving water upstream of the existing discharge or proposed discharge site influenced by any of the following (check all that apply):

- | | |
|---|--|
| ☐ oil field activities | ☐ urban runoff |
| ☐ agricultural runoff | ☐ septic tanks |
| ☐ upstream discharges | ☐ other, specify: |

b. Uses of water body observed or evidence of such uses (check all that apply):

- | | |
|---|--|
| ☐ livestock watering | ☐ industrial water supply |
| ☐ non-contact recreation | ☐ irrigation withdrawal |
| ☐ domestic water supply | ☐ navigation |
| ☐ contact recreation | ☐ picnic/park activities |
| ☐ fishing | ☐ other, specify: |

c. Description which best describes the aesthetics of the receiving water and the surrounding area (check only one):

- ☐ **Wilderness:** outstanding natural beauty; usually wooded or un-pastured area: water clarity exceptional
- ☐ **Natural Area:** trees or native vegetation common; some development evident (from fields, pastures, dwellings); water clarity discolored
- ☐ **Common Setting:** not offensive, developed but uncluttered; water may be colored or turbid
- ☐ **Offensive:** stream does not enhance aesthetics; cluttered; highly developed; dumping areas; water discolored

ATTACHMENT A
COPY OF EPAY VOUCHER
(ADMINISTRATIVE REPORT 1.0, p.3, ITEM 1.h)

Print this voucher for your records. If you are sending the TCEQ hardcopy documents related to this payment, include a copy of this voucher.

Transaction Information
Voucher Number: 774715
Trace Number: 582EA000676192
Date: 07/14/2025 10:51 AM
Payment Method: CC - Authorization 000003929R
Voucher Amount: \$1,200.00
Fee Type: WW PERMIT - MINOR FACILITY SUBJECT TO 40 CFR 400-471 - RENEWAL
ePay Actor: HAILEY COFTY
Actor Email: hcofty@wcmgroup.com
IP: 64.110.134.146

Payment Contact Information
Name: HAILEY COFTY
Company: THE WCM GROUP INC
Address: 110 S BENDER AVE, HUMBLE, TX 77338
Phone: 281-446-7070

Site Information
RN: RN100213909
Site Name: LAREDO POWER STATION
Site Location: 7300 CPL RD LAREDO TX 78041 2531

Customer Information
CN: CN600129019
Customer Name: CITY PUBLIC SERVICE BOARD
Customer Address: 500 MCCULLOUGH AVE, SAN ANTONIO, TX 78215 2104

Other Information
Program Area ID: WQ0001200000

Close

Print this voucher for your records. If you are sending the TCEQ hardcopy documents related to this payment, include a copy of this voucher.

Transaction Information**Voucher Number:** 774716**Trace Number:** 582EA000676192**Date:** 07/14/2025 10:51 AM**Payment Method:** CC - Authorization 000003929R**Voucher Amount:** \$15.00**Fee Type:** 30 TAC 305.53B WQ RENEWAL NOTIFICATION FEE**ePay Actor:** HAILEY COFTY**Actor Email:** hcofty@wcmgroup.com**IP:** 64.110.134.146**Payment Contact Information****Name:** HAILEY COFTY**Company:** THE WCM GROUP INC**Address:** 110 S BENDER AVE, HUMBLE, TX 77338**Phone:** 281-446-7070[Close](#)

[Site Help](#) | [Disclaimer](#) | [Web Policies](#) | [Accessibility](#) | [Our Compact with Texans](#) | [TCEQ Homeland Security](#) | [Contact Us](#)
[Statewide Links](#): [Texas.gov](#) | [Texas Homeland Security](#) | [TRAIL Statewide Archive](#) | [Texas Veterans Portal](#)

© 2002-2025 Texas Commission on Environmental Quality

ATTACHMENT B
CORE DATA FORM
(ADMINISTRATIVE REPORT 1.0, p. 4, ITEM 4.a)



TCEQ Core Data Form

For detailed instructions on completing this form, please read the Core Data Form Instructions or call 512-239-5175.

SECTION I: General Information

1. Reason for Submission (If other is checked please describe in space provided.)		
☐ New Permit, Registration or Authorization (Core Data Form should be submitted with the program application.)		
☒ Renewal (Core Data Form should be submitted with the renewal form)	☐ Other	
2. Customer Reference Number (if issued)	Follow this link to search for CN or RN numbers in Central Registry**	3. Regulated Entity Reference Number (if issued)
CN 600129019		RN 100212909

SECTION II: Customer Information

4. General Customer Information		5. Effective Date for Customer Information Updates (mm/dd/yyyy)			
☐ New Customer ☐ Update to Customer Information ☐ Change in Regulated Entity Ownership ☐ Change in Legal Name (Verifiable with the Texas Secretary of State or Texas Comptroller of Public Accounts)					
The Customer Name submitted here may be updated automatically based on what is current and active with the Texas Secretary of State (SOS) or Texas Comptroller of Public Accounts (CPA).					
6. Customer Legal Name (If an individual, print last name first: eg: Doe, John)				<i>If new Customer, enter previous Customer below:</i>	
City Public Service Board					
7. TX SOS/CPA Filing Number		8. TX State Tax ID (11 digits)		9. Federal Tax ID (9 digits)	
None		17460020716		746002071	
10. DUNS Number (if applicable)					
11. Type of Customer:		☐ Corporation		☐ Individual	
Government: ☒ City ☐ County ☐ Federal ☐ Local ☐ State ☐ Other		☐ Sole Proprietorship		Partnership: ☐ General ☐ Limited	
12. Number of Employees				13. Independently Owned and Operated?	
☐ 0-20 ☐ 21-100 ☐ 101-250 ☐ 251-500 ☒ 501 and higher				☐ Yes ☐ No	
14. Customer Role (Proposed or Actual) – as it relates to the Regulated Entity listed on this form. Please check one of the following					
☐ Owner ☐ Operator ☒ Owner & Operator ☐ Other: ☐ Occupational Licensee ☐ Responsible Party ☐ VCP/BSA Applicant					
15. Mailing Address:					
500 McCulough Avenue					
City		San Antonio		State	TX
ZIP		78215		ZIP + 4	
16. Country Mailing Information (if outside USA)				17. E-Mail Address (if applicable)	

18. Telephone Number	19. Extension or Code	20. Fax Number (if applicable)
(210) 353-2158		() -

SECTION III: Regulated Entity Information

21. General Regulated Entity Information (If 'New Regulated Entity' is selected, a new permit application is also required.)								
☐ New Regulated Entity ☐ Update to Regulated Entity Name ☐ Update to Regulated Entity Information								
<i>The Regulated Entity Name submitted may be updated, in order to meet TCEQ Core Data Standards (removal of organizational endings such as Inc, LP, or LLC).</i>								
22. Regulated Entity Name (Enter name of the site where the regulated action is taking place.)								
Laredo Power Station								
23. Street Address of the Regulated Entity: (No PO Boxes)	7300 CPL Road							
	City	Laredo	State	TX	ZIP	78041	ZIP + 4	2531
24. County	Webb							

If no Street Address is provided, fields 25-28 are required.

25. Description to Physical Location:								
26. Nearest City						State	Nearest ZIP Code	
<i>Latitude/Longitude are required and may be added/updated to meet TCEQ Core Data Standards. (Geocoding of the Physical Address may be used to supply coordinates where none have been provided or to gain accuracy).</i>								
27. Latitude (N) In Decimal:						28. Longitude (W) In Decimal:		
Degrees	Minutes		Seconds		Degrees	Minutes		Seconds
29. Primary SIC Code	30. Secondary SIC Code		31. Primary NAICS Code			32. Secondary NAICS Code		
(4 digits)	(4 digits)		(5 or 6 digits)			(5 or 6 digits)		
4911								
33. What is the Primary Business of this entity? (Do not repeat the SIC or NAICS description.)								
Electric power generation								
34. Mailing Address:	500 McCullough Avenue							
	City	San Antonio	State	TX	ZIP	78215	ZIP + 4	
35. E-Mail Address:								
36. Telephone Number			37. Extension or Code			38. Fax Number (if applicable)		
(210) 353-2770						() -		

39. TCEQ Programs and ID Numbers Check all Programs and write in the permits/registration numbers that will be affected by the updates submitted on this form. See the Core Data Form instructions for additional guidance.

☐ Dam Safety	☐ Districts	☐ Edwards Aquifer	☐ Emissions Inventory Air	☐ Industrial Hazardous Waste
☐ Municipal Solid Waste	☐ New Source Review Air	☐ OSSF	☐ Petroleum Storage Tank	☐ PWS
☐ Sludge	☐ Storm Water	☐ Title V Air	☐ Tires	☐ Used Oil
☐ Voluntary Cleanup	☒ Wastewater	☐ Wastewater Agriculture	☐ Water Rights	☐ Other:
	WQ0001200000			

SECTION IV: Preparer Information

40. Name:	Hailey Cofty			41. Title:	Senior Project Manager
42. Telephone Number	43. Ext./Code	44. Fax Number	45. E-Mail Address		
(281) 446-7070		() -	hcofty@wcmgroup.com		

SECTION V: Authorized Signature

46. By my signature below, I certify, to the best of my knowledge, that the information provided in this form is true and complete, and that I have signature authority to submit this form on behalf of the entity specified in Section II, Field 6 and/or as required for the updates to the ID numbers identified in field 39.

Company:	City Public Service Board		Job Title:	Director Environmental Planning and Compliance	
Name (In Print):	Gregg Tieken			Phone:	(210) 353- 2158
Signature:				Date:	July 3, 2025

ATTACHMENT C
PLAIN LANGUAGE SUMMARY
(ADMINISTRATIVE REPORT 1.0, p. 7, ITEM 9.f)

PLAIN LANGUAGE SUMMARY

ENGLISH TEMPLATE FOR TPDES RENEWAL APPLICATIONS INDUSTRIAL WASTEWATER

The following summary is provided for this pending water quality permit application being reviewed by the Texas Commission on Environmental Quality as required by 30 Texas Administrative Code Chapter 39. The information provided in this summary may change during the technical review of the application and are not federal enforceable representations of the permit application.

City Public Service Board (CN600129019) operates Laredo Power Station (RN100213909) a natural gas-fired electric power generation facility. The facility is located at 7300 CPL Road in Laredo, Webb County, Texas 78041. This application is for a renewal to discharge cooling tower blowdown commingled with low volume waste, previously monitored chemical metal cleaning waste, and stormwater at a daily average flow not to exceed 1.3 million gallons per day (MGD) and daily maximum flow not to exceed 2.0 MGD via Outfall 001. This permit will not authorize a discharge of pollutants into water in the state.

The discharge of low-volume waste sources and cooling tower blowdown via Outfall 001 are subject to federal effluent limitation guidelines at 40 CFR Part 423. The pollutants expected from these discharges based on 40 CFR 423 are: total suspended solids, oil and grease, free available chlorine, total chromium, total zinc, and pH. Additional potential pollutants are included in the Industrial Wastewater Application Technical Report, Worksheet 2.0.

LPS primarily discharges cooling tower blowdown water which requires minimal to no treatment. Low-volume waste sources are routed to the cooling tower, where the pH of the water is adjusted with sulfuric acid or caustic, as necessary to meet permit limitations. Sodium hypochlorite is added to the cooling tower as a biological control agent. Stormwater from the facility is routed to an oil/water separator prior to commingling with the cooling tower blowdown. Sanitary wastes are disposed of at the City of Laredo Zacate Creek WWTP (WQ0010681002).

PLANTILLA EN ESPAÑOL PARA SOLICITUDES RENOVACIONES DE TPDES AGUAS RESIDUALES INDUSTRIALES

El siguiente resumen se proporciona para esta solicitud de permiso de calidad del agua pendiente que está siendo revisada por la Comisión de Calidad Ambiental de Texas según lo requerido por el Capítulo 39 del Código Administrativo de Texas 30. La información proporcionada en este resumen puede cambiar durante la revisión técnica de la solicitud y no son representaciones federales exigibles de la solicitud de permiso.

La Junta de Servicio Público de la Ciudad (CN600129019) opera la Central Eléctrica de Laredo (RN100213909), una planta de generación de energía eléctrica a gas natural. La planta está ubicada en 7300 CPL Road, Laredo, Condado de Webb, Texas 78041. Esta solicitud es para la renovación del permiso para descargar la purga de la torre de enfriamiento mezclada con residuos de bajo volumen, residuos de limpieza química de metales previamente monitoreados y aguas pluviales con un caudal promedio diario que no exceda los 1.3 millones de galones por día (MGD) y un caudal máximo diario que no exceda los 2.0 MGD a través del Desagüe 001. Este permiso no autoriza la descarga de contaminantes al agua en el estado.

La descarga de fuentes de residuos de bajo volumen y la purga de torres de enfriamiento a través del Emisario 001 están sujetas a las directrices federales de limitación de efluentes del Título 40 del Código de Reglamentos Federales (CFR), Parte 423. Los contaminantes esperados de estas descargas, según el Título 40 del CFR, Parte 423, son: sólidos suspendidos totales, aceite y grasa, cloro libre disponible, cromo total, zinc total y pH. Se incluyen otros contaminantes potenciales en el Informe Técnico de Aplicación de Aguas Residuales Industriales, Hoja de Trabajo 2.0.

LPS descarga principalmente el agua de purga de la torre de enfriamiento, que requiere un tratamiento mínimo o nulo. Los residuos de bajo volumen se dirigen a la torre de enfriamiento, donde se ajusta el pH del agua con ácido sulfúrico o cáustico, según sea necesario para cumplir con las limitaciones del permiso. Se añade hipoclorito de sodio a la torre de enfriamiento como agente de control biológico. Las aguas pluviales de la instalación se dirigen a un separador de aceite/agua antes de mezclarse con la purga de la torre de enfriamiento. Los desechos sanitarios se eliminan en la Planta de Tratamiento de Aguas Residuales Zacate Creek de la Ciudad de Laredo (WQ0010681002).

ATTACHMENT D
SUPPLEMENTAL PERMIT INFORMATION FORM (SPIF)
(ADMINISTRATIVE REPORT, p. 14)

TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

SUPPLEMENTAL PERMIT INFORMATION FORM (SPIF)

FOR AGENCIES REVIEWING DOMESTIC OR INDUSTRIAL TPDES WASTEWATER PERMIT APPLICATIONS

TCEQ USE ONLY:

Application type: ____Renewal ____Major Amendment ____Minor Amendment ____New

County: _____ Segment Number: _____

Admin Complete Date: _____

Agency Receiving SPIF:

____ Texas Historical Commission

____ U.S. Fish and Wildlife

____ Texas Parks and Wildlife Department

____ U.S. Army Corps of Engineers

This form applies to TPDES permit applications only. (Instructions, Page 53)

Complete this form as a separate document. TCEQ will mail a copy to each agency as required by our agreement with EPA. If any of the items are not completely addressed or further information is needed, we will contact you to provide the information before issuing the permit. Address each item completely.

Do not refer to your response to any item in the permit application form. Provide each attachment for this form separately from the Administrative Report of the application. The application will not be declared administratively complete without this SPIF form being completed in its entirety including all attachments. Questions or comments concerning this form may be directed to the Water Quality Division's Application Review and Processing Team by email at WQ-ARPTeam@tceq.texas.gov or by phone at (512) 239-4671.

The following applies to all applications:

1. Permittee: City Public Service Board

Permit No. WQ00 01200000EPA ID No. TX 0001627

Address of the project (or a location description that includes street/highway, city/vicinity, and county):

7300 CPL Road, Laredo, Webb County, Texas

Provide the name, address, phone and fax number of an individual that can be contacted to answer specific questions about the property.

Prefix (Mr., Ms., Miss): Ms.

First and Last Name: Summer Johnson

Credential (P.E, P.G., Ph.D., etc.):

Title: Environmental Analyst

Mailing Address: 500 McCullough Avenue / MD: RT0601

City, State, Zip Code: San Antonio, TX 78215

Phone No.: 210-353-2770 Ext.:

Fax No.:

E-mail Address: SLJohnson@cpsenergy.com

2. List the county in which the facility is located: Webb
3. If the property is publicly owned and the owner is different than the permittee/applicant, please list the owner of the property.

N/A

4. Provide a description of the effluent discharge route. The discharge route must follow the flow of effluent from the point of discharge to the nearest major watercourse (from the point of discharge to a classified segment as defined in 30 TAC Chapter 307). If known, please identify the classified segment number.

Effluent discharges directly into the Rio Grande Below Amistad Reservoir in Segment No. 2304.

5. Please provide a separate 7.5-minute USGS quadrangle map with the project boundaries plotted and a general location map showing the project area. Please highlight the discharge route from the point of discharge for a distance of one mile downstream. (This map is required in addition to the map in the administrative report).

Provide original photographs of any structures 50 years or older on the property.

Does your project involve any of the following? Check all that apply.

- ☐ Proposed access roads, utility lines, construction easements
- ☐ Visual effects that could damage or detract from a historic property's integrity
- ☐ Vibration effects during construction or as a result of project design

- ☐ Additional phases of development that are planned for the future
- ☐ Sealing caves, fractures, sinkholes, other karst features
- ☐ Disturbance of vegetation or wetlands

1. List proposed construction impact (surface acres to be impacted, depth of excavation, sealing of caves, or other karst features):

N/A

2. Describe existing disturbances, vegetation, and land use:

Existing natural gas-fired electric power generation facility, roadways, auxiliary equipment, and buildings.

THE FOLLOWING ITEMS APPLY ONLY TO APPLICATIONS FOR NEW TPDES PERMITS AND MAJOR AMENDMENTS TO TPDES PERMITS

3. List construction dates of all buildings and structures on the property:

N/A

4. Provide a brief history of the property, and name of the architect/builder, if known.

N/A

SUPPLEMENTAL PERMIT INFORMATION FORM
(ITEM 5 - ORIGINAL PHOTOGRAPHS OF STRUCTURES 50 YEARS OR OLDER)



1. Original Gas House constructed in the late 1940s / early 1950s. Document storage since 2008.



2. Original shop constructed in the late 1940s / early 1950s. Utilized as a welding shop from the 1980s through 2010. Warehouse since 2010.



3. Original Paint Storage Room and grounds equipment storage constructed in the late 1940s / early 1950s. Miscellaneous storage building since 2010.



4. Original picnic ground recreation building constructed in the late 1940s / early 1950s. Currently not in use.



5. Original Laboratory constructed in the late 1940s / early 1950s. Braker and storage building since the 1970s.



6. Cooling Tower 1, constructed in the 1940s / 1950s and has been rebuilt throughout the years. Currently in use.





7. Cooling Tower Makeup Pump House – Feeds the cooling tower basin. Constructed in the the 1940s / 1950s. Currently in use.



8. Original 1940s / 1950s water clarifier. In the 1970s the flow was reversed and this became an oil water separator prior to discharge to the outfall. Currently in use.



9. Units 1 & 2 Constructed in the 1940s / 1950s and Unit 3 constructed in the 1970s. Units 1 & 2 boilers were demolished in 2010. Building is currently still in place.

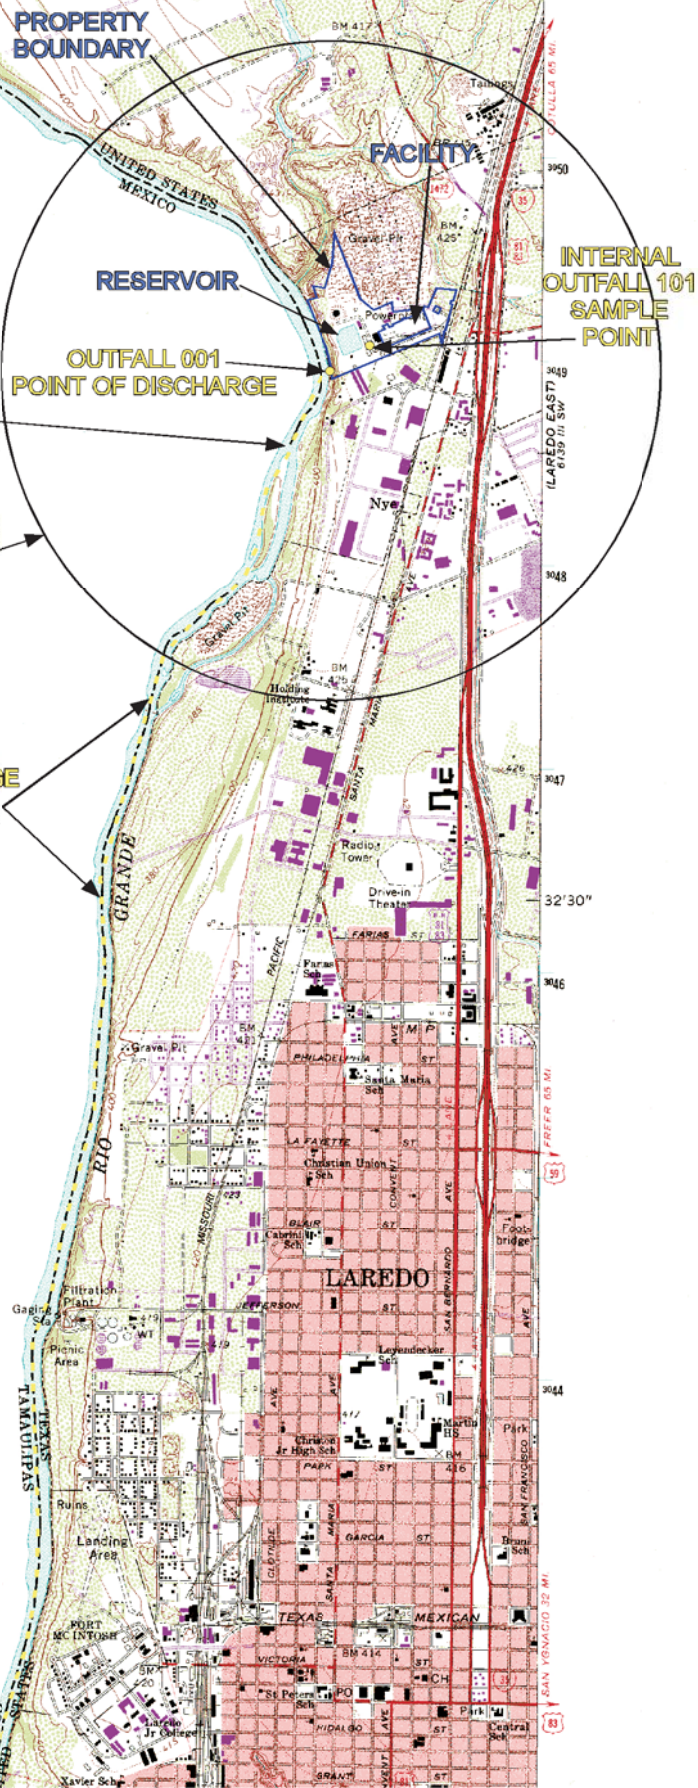

SITE LOCATION USGS MAP
City Public Service Board - Laredo Power Station
Laredo, Webb County, Texas

DRAWN BY:	AKD/HJC
DATE:	2/17/2020 / REV 5/12/2025
DRAWING ID:	Y:\LAR\LAR\ Figures

ONE (1) INCH = 2,000 FEET



FIGURE
SPIF



Interstate Route U. S. Route State Route

ATTACHMENT E
SAFETY DATA SHEETS
(TECHNICAL REPORT 1.0, p. 2, Item 1.c; TECHNICAL REPORT 1.0, p. 8,
Item 5.b)

CHEMICAL USE

City Public Service Board - Laredo Power Station

Product Name	Product Use	Product Constituents	CAS Number
Cooling Tower / RO Chemicals			
Univar Ammonium Hydroxide 10-35%		Ammonium Hydroxide	1336-21-6
Univar Sulfuric Acid 93%	pH adjustment	Sulfuric acid	7664-93-9
Univar Caustic Soda 50%	pH adjustment	Sodium Hydroxide	1310-73-2
Miscellaneous Chemicals			
ExxonMobil Mobil DTE 25	Hydraulic Fluid		
ExxonMobil Mobil DTE Oil Light	Turbine Oil		
Phillips 66 Transformer Oil	Transformer Oil	Distillates, petroleum, hydrotreated light naphthenic	64742-53-6
		Distillates, petroleum, hydrotreated paraffinic	64742-55-8
		Distillates, petroleum, solvent-dewaxed light paraffinic	64742-56-9
		2,6-Di-tert-butyl-p-cresol	128-37-0



Univar
3075 Highland Pkwy STE 200
Downers Grove, IL 60515
425-889-3400

SAFETY DATA SHEET

1. Identification

Product identifier: AMMONIUM HYDROXIDE 10-35%

Other means of identification

Synonyms: Aqua Ammonia
CAS NUMBERS: 1336-21-6
SDS number: 000100000133

Recommended use and restriction on use

Recommended use: Reserved for industrial and professional use.

Restrictions on use: Not known.

Manufacturer/Importer/Supplier/Distributor Information

Univar

3075 Highland Pkwy STE 200

Downers Grove, IL 60515

425-889-3400

Emergency telephone number:For emergency assistance Involving chemicals

call CHEMTREC day or night at: 1-800-424-9300. CHEMTREC INTERNATIONAL Tel# 703-527-3887

2. Hazard(s) identification

Hazard Classification

Health Hazards

Acute toxicity (Oral) Category 4

Skin Corrosion/Irritation Category 1B

Serious Eye Damage/Eye Irritation Category 1

Specific Target Organ Toxicity -
Repeated Exposure Category 2

Environmental HazardsAcute
hazards to the aquatic environment Category 3

Version: 1.3
Revision Date: 05/20/2019



Chronic hazards to the aquatic
environment

Category 1

Label Elements

Hazard Symbol



Signal Word

Danger

Hazard Statement

May cause damage to organs.
Harmful if swallowed.
Causes severe skin burns and eye damage.
May cause respiratory irritation.
Very toxic to aquatic life with long lasting effects.

Precautionary Statements

Prevention

Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection. Do not breathe dust or mists. Use only outdoors or in a well-ventilated area.

Response

IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water [or shower]. IF SWALLOWED: Call a POISON CENTER/doctor if

Version: 1.3
Revision Date: 05/20/2019



you feel unwell. Rinse mouth. Do NOT induce vomiting. Immediately call a POISON CENTER/doctor. Specific treatment (see on this label). Wash contaminated clothing before reuse.

Storage Store locked up.

Disposal Dispose of contents/container to an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal.

Other hazards which do not result in GHS classification None.

3. Composition/information on ingredients

Substances

Chemical Identity	Common name and synonyms	CAS number	Content in percent (%)*
Ammonium Hydroxide		1336-21-6	>=10 - <=35%
Water		7732-18-5	>=65 - <=90%

* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

Composition Comments: The components are not hazardous or are below required disclosure limits.

4. First-aid measures

General information: Get medical advice/attention.

Ingestion: Call a physician or poison control center immediately. Only induce vomiting at the instruction of medical personnel. Never give anything by mouth to an unconscious person.

Inhalation: Move to fresh air. If breathing is difficult, give oxygen. Perform artificial respiration if breathing has stopped. Get medical attention.

Version: 1.3
Revision Date: 05/20/2019



Skin Contact: Immediately flush with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Get medical attention immediately.

Eye contact: If in eyes, hold eyes open, flood with water for at least 15 minutes and see a doctor.

Most important symptoms/effects, acute and delayed

Symptoms: No data available.

Indication of immediate medical attention and special treatment needed

Treatment: No data available.

5. Fire-fighting measures

General Fire Hazards: No unusual fire or explosion hazards noted.

Suitable (and unsuitable) extinguishing media

Suitable extinguishing media: Use: Carbon dioxide or dry powder. Foam. Water Spray or Fog.

Unsuitable extinguishing media: No data available.

Specific hazards arising from the chemical: During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Special fire fighting procedures: No data available.

Special protective equipment for fire-fighters: Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures: Ventilate closed spaces before entering them. Keep unauthorized personnel away. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.

Methods and material for containment and cleaning up: Absorb spillage with non-combustible, absorbent material. Prevent runoff from entering drains, sewers, or streams.

Environmental Precautions: Do not contaminate water sources or sewer.

Version: 1.3
Revision Date: 05/20/2019



7. Handling and storage

Precautions for safe handling: Store away from incompatible materials. Use personal protective equipment as required. Do not get in eyes, on skin, on clothing.

Conditions for safe storage, including any incompatibilities: Store locked up.

8. Exposure controls/personal protection

Control Parameters

Occupational Exposure Limits

Chemical Identity	Type	Exposure Limit Values	Source
Ammonium Hydroxide	TWA	25 ppm	US. ACGIH Threshold Limit Values (03 2013)
	STEL	35 ppm	US. ACGIH Threshold Limit Values (03 2013)
	REL	25 ppm 18 mg/m3	US. NIOSH: Pocket Guide to Chemical Hazards (2010)
	STEL	35 ppm 27 mg/m3	US. NIOSH: Pocket Guide to Chemical Hazards (2010)
	PEL	50 ppm 35 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006)
	STEL	35 ppm 27 mg/m3	US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989)
	AN ESL	17 µg/m3	US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (02 2013)
	ST ESL	170 µg/m3	US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (02 2013)
	ST ESL	120 ppb	US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (02 2013)
	AN ESL	12 ppb	US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (02 2013)
	TWA PEL	25 ppm 18 mg/m3	US. California Code of Regulations,

Version: 1.3
Revision Date: 05/20/2019



			Title 8, Section 5155. Airborne Contaminants (02 2012)
	STEL	35 ppm 27 mg/m3	US. California Code of Regulations, Title 8, Section 5155. Airborne Contaminants (02 2012)
Chemical Identity	Type	Exposure Limit Values	Source
Ammonium Hydroxide	TWA	25 ppm	US. ACGIH Threshold Limit Values (03 2013)
	STEL	35 ppm	US. ACGIH Threshold Limit Values (03 2013)
	REL	25 ppm 18 mg/m3	US. NIOSH: Pocket Guide to Chemical Hazards (2010)
	STEL	35 ppm 27 mg/m3	US. NIOSH: Pocket Guide to Chemical Hazards (2010)
	PEL	50 ppm 35 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006)
	STEL	35 ppm 27 mg/m3	US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989)
	AN ESL	17 µg/m3	US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (02 2013)
	ST ESL	170 µg/m3	US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (02 2013)
	ST ESL	120 ppb	US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (02 2013)
	AN ESL	12 ppb	US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (02 2013)
	TWA PEL	25 ppm 18 mg/m3	US. California Code of Regulations, Title 8, Section 5155. Airborne Contaminants (02 2012)
	STEL	35 ppm 27 mg/m3	US. California Code of Regulations, Title 8, Section 5155. Airborne Contaminants (02 2012)

Version: 1.3
Revision Date: 05/20/2019



Appropriate Engineering Controls

Adequate ventilation should be provided so that exposure limits are not exceeded.

Individual protection measures, such as personal protective equipment

General information:

Provide easy access to water supply and eye wash facilities. Use personal protective equipment as required. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing to remove contaminants. Discard contaminated footwear that cannot be cleaned.

Eye/face protection:

Wear goggles/face shield.

Skin Protection

Hand Protection:

Chemical resistant gloves

Other:

Chemical resistant clothing

Respiratory Protection:

In case of inadequate ventilation use suitable respirator.

Hygiene measures:

Do not eat, drink or smoke when using the product. Wash hands after handling. Do not get in eyes. Observe good industrial hygiene practices. Wash contaminated clothing before reuse. Do not get this material in contact with skin. Wash hands before breaks and immediately after handling the product.

9. Physical and chemical properties

Physical state:

liquid

Form:

liquid

Color:

Clear colorless

Odor:

Pungent, Ammonia odor

Odor threshold:

1 - 50 ppm

pH:

11.6

Melting point/freezing point:

-69 °C

Initial boiling point and boiling range:

37 - 100 °C

Flash Point:

No data available.

Evaporation rate:

No data available.

Flammability (solid, gas):

No data available.

Upper/lower limit on flammability or explosive limits

Flammability limit - upper (%):

28 %(V)

Flammability limit - lower (%):

15 %(V)

Explosive limit - upper (%):

19.8 mg/m3

Explosive limit - lower (%):

10.6 mg/m3

Version: 1.3
Revision Date: 05/20/2019



Vapor pressure:	103 hPa (25 °C)
Vapor density:	0.6 AIR=1
Relative density:	0.989
Solubility(ies)	
Solubility in water:	Completely Soluble
Solubility (other):	No data available.
Partition coefficient (n-octanol/water):	No data available.
Auto-ignition temperature:	No data available.
Decomposition temperature:	No data available.
Viscosity:	No data available.
Other information	
Minimum ignition temperature:	850 °C

10. Stability and reactivity

Reactivity:	No data available.
Chemical Stability:	Material is stable under normal conditions.
Possibility of hazardous reactions:	Stable
Conditions to avoid:	Avoid heat or contamination.
Incompatible Materials:	Strong oxidizing agents. Strong acids
Hazardous Decomposition Products:	No data available.

11. Toxicological information

Symptoms related to the physical, chemical and toxicological characteristics

Ingestion:	No data available.
Inhalation:	No data available.
Skin Contact:	No data available.
Eye contact:	No data available.

Information on toxicological effects

Acute toxicity (list all possible routes of exposure)

Oral

Product:	LD 50 (Rat): 350 mg/kg
----------	------------------------

Dermal

Product:	No data available.
----------	--------------------

Inhalation

Version: 1.3
Revision Date: 05/20/2019



Product:	LC L0 (Mouse,): 1,000 mg/l
Repeated dose toxicity	
Product:	No data available.
Skin Corrosion/Irritation	
Product:	Causes skin burns.
Serious Eye Damage/Eye Irritation	
Product:	Serious eye damage
Respiratory or Skin Sensitization	
Product:	Not a skin sensitizer.
Carcinogenicity	
Product:	No data available.
IARC Monographs on the Evaluation of Carcinogenic Risks to Humans:	
No carcinogenic components identified	
US. National Toxicology Program (NTP) Report on Carcinogens:	
No carcinogenic components identified	
US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050):	
No carcinogenic components identified	
Germ Cell Mutagenicity	
In vitro	
Product:	No data available.
In vivo	
Product:	No data available.
Reproductive toxicity	
Product:	No data available.
Specific Target Organ Toxicity - Single Exposure	
Product:	No data available.
Specific Target Organ Toxicity - Repeated Exposure	
Product:	No data available.
Aspiration Hazard	
Product:	No data available.
Other effects:	No data available.

12. Ecological information

Ecotoxicity:

Acute hazards to the aquatic environment:

Fish

Product: No data available.

Specified substance(s):

Version: 1.3
Revision Date: 05/20/2019



Ammonium Hydroxide	LC 50 (Fathead minnow (Pimephales promelas), 24 h): 17 mg/l Mortality LC 50 (Goldfish (Carassius auratus), 24 h): 17 mg/l Mortality LC 50 (Western mosquitofish (Gambusia affinis), 24 h): 18 mg/l Mortality LC 50 (Channel catfish (Ictalurus punctatus), 24 h): 2.36 mg/l Mortality LC 50 (Fathead minnow (Pimephales promelas), 24 h): 23.02 mg/l Mortality
Aquatic Invertebrates	
Product:	No data available.
Specified substance(s):	
Ammonium Hydroxide	LC 50 (Water flea (Daphnia magna), 25 h): 60 mg/l Mortality LC 50 (Water flea (Ceriodaphnia dubia), 48 h): > 0 - < 10 mg/l Mortality LC 50 (Water flea (Daphnia magna), 50 h): 32 mg/l Mortality LC 50 (Water flea (Daphnia magna), 100 h): 20 mg/l Mortality
Chronic hazards to the aquatic environment:	
Fish	
Product:	No data available.
Aquatic Invertebrates	
Product:	No data available.
Toxicity to Aquatic Plants	
Product:	No data available.
Persistence and Degradability	
Biodegradation	
Product:	No data available.
BOD/COD Ratio	
Product:	No data available.
Bioaccumulative potential	
Bioconcentration Factor (BCF)	
Product:	No data available.
Partition Coefficient n-octanol / water (log Kow)	
Product:	No data available.
Mobility in soil:	No data available.
Known or predicted distribution to environmental compartments	
Ammonia, aqueous solution	No data available.
Water	No data available.
Known or predicted distribution to environmental compartments	
Water	No data available.
Known or predicted distribution to environmental compartments	

Version: 1.3
Revision Date: 05/20/2019



Ammonia, aqueous solution	No data available.
Water	No data available.
Known or predicted distribution to environmental compartments	
Ammonia, aqueous solution	No data available.

13. Disposal considerations

Disposal instructions:	Discharge, treatment, or disposal may be subject to national, state, or local laws.
Contaminated Packaging:	Since emptied containers retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

UN Number:	UN 2672
UN Proper Shipping Name:	Ammonia solutions
Transport Hazard Class(es)	
Class:	8
Label(s):	8
Packing Group:	III
Marine Pollutant:	Marine Pollutant
Special precautions for user:	—

IMDG

UN Number:	UN 2672
UN Proper Shipping Name:	AMMONIA SOLUTION
Transport Hazard Class(es)	
Class:	8
Label(s):	8
EmS No.:	F-A, S-B
Packing Group:	III
Marine Pollutant:	Marine Pollutant

Version: 1.3
Revision Date: 05/20/2019



Special precautions for user:	—
IATA	
UN Number:	UN 2672
Proper Shipping Name:	AMMONIA SOLUTION
Transport Hazard Class(es):	
Class:	8
Label(s):	8
Packing Group:	III
Environmental Hazards	Not regulated.
Special precautions for user:	—
Other information	
Passenger and cargo aircraft:	Allowed.
Cargo aircraft only:	Allowed.

15. Regulatory information

Version: 1.3
Revision Date: 05/20/2019



US Federal RegulationsUS. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

None present or none present in regulated quantities.

CERCLA Hazardous Substance List (40 CFR 302.4):

Ammonium Hydroxide Reportable quantity: 1000 lbs.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

☐ Acute (Immediate) ☐ Chronic (Delayed) ☐ Fire ☐ Reactive ☐ Pressure Generating

SARA 302 Extremely Hazardous Substance

None present or none present in regulated quantities.

SARA 304 Emergency Release Notification

Chemical Identity	RQ
Ammonium Hydroxide	1000 lbs.

SARA 311/312 Hazardous Chemical

Chemical Identity	Threshold Planning Quantity
Ammonium Hydroxide	500 lbs

SARA 313 (TRI Reporting)

Chemical Identity	Reporting threshold for other users	Reporting threshold for manufacturing and processing
Ammonium Hydroxide	10000 lbs	25000 lbs.

Clean Water Act Section 311 Hazardous Substances (40 CFR 117.3)

Ammonium Hydroxide Reportable quantity: 1000 lbs.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130):

None present or none present in regulated quantities.

US State Regulations

US. California Proposition 65

No ingredient regulated by CA Prop 65 present.

US. New Jersey Worker and Community Right-to-Know Act

Ammonium Hydroxide Listed

US. Massachusetts RTK - Substance List

Ammonium Hydroxide Listed

US. Pennsylvania RTK - Hazardous Substances

Ammonium Hydroxide Listed

US. Rhode Island RTK

Ammonium Hydroxide Listed

Version: 1.3
 Revision Date: 05/20/2019



Inventory Status: Australia AICS:	On or in compliance with the inventory
Canada DSL Inventory List:	On or in compliance with the inventory
EU EINECS List:	On or in compliance with the inventory
EU ELINCS List:	Not in compliance with the inventory.
Japan (ENCS) List:	Not in compliance with the inventory.
EU No Longer Polymers List:	Not in compliance with the inventory.
China Inv. Existing Chemical Substances:	On or in compliance with the inventory
Korea Existing Chemicals Inv. (KECI):	On or in compliance with the inventory
Canada NDSL Inventory:	Not in compliance with the inventory.
Philippines PICCS:	On or in compliance with the inventory
US TSCA Inventory:	On or in compliance with the inventory
New Zealand Inventory of Chemicals:	On or in compliance with the inventory
Japan ISHL Listing:	Not in compliance with the inventory.
Japan Pharmacopoeia Listing:	Not in compliance with the inventory.

16.Other information, including date of preparation or last revision


HMIS Hazard ID

Health	3
Flammability	1
Physical Hazards	0
PERSONAL PROTECTION	B

B - Safety Glasses & Gloves

Hazard rating: 0 - Minimal; 1 - Slight; 2 - Moderate; 3 - Serious; 4 - Severe; RNP - Rating not possible; *Chronic health effect

NFPA Hazard ID



Red	Flammability
Blue	Health
Yellow	Reactivity
White	Special hazard.

Hazard rating: 0 - Minimal; 1 - Slight; 2 - Moderate; 3 - Serious; 4 - Severe; RNP - Rating not possible

Issue Date: 05/20/2019
Revision Date: No data available.
Version #: 1.3
Further Information: No data available.

Version: 1.3
Revision Date: 05/20/2019



Univar USA Inc Safety Data Sheet

For Additional Information contact SDS Coordinator during business hours, Pacific time: (425) 889-3400

Notice

Univar USA Inc. ("Univar") expressly disclaims all express or implied warranties of merchantability and fitness for a particular purpose, with respect to the product or information provided herein, and shall under no circumstances be liable for incidental or consequential damages.

Do not use ingredient information and/or ingredient percentages in this SDS as a product specification. For product specification information refer to a product specification sheet and/or a certificate of analysis. These can be obtained from your local Univar sales office.

All information appearing herein is based upon data obtained from the manufacturer and/or recognized technical sources. While the information is believed to be accurate, Univar makes no representations as to its accuracy or sufficiency. Conditions of use are beyond Univar's control and therefore users are responsible to verify this data under their own operating conditions to determine whether the product is suitable for their particular purposes and they assume all risks of their use, handling, and disposal of the product, or from the publication or use of, or reliance upon, information contained herein.

This information relates only to the product designated herein, and does not relate to its use in combination with any other material or in any other process

Product Name: MOBIL DTE 25
Revision Date: 14Apr2008
Page 1 of 8

MATERIAL SAFETY DATA SHEET

SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: MOBIL DTE 25
Product Description: Base Oil and Additives
Product Code: 602631-00, 970826
Intended Use: Hydraulic fluid

COMPANY IDENTIFICATION

Supplier: EXXON MOBIL CORPORATION
3225 GALLOWES RD.
FAIRFAX, VA. 22037 USA

24 Hour Health Emergency 609-737-4411
Transportation Emergency Phone 800-424-9300
ExxonMobil Transportation No. 281-834-3296
MSDS Requests 713-613-3661
Product Technical Information 800-662-4525, 800-947-9147
MSDS Internet Address <http://www.exxon.com>, <http://www.mobil.com>

SECTION 2 COMPOSITION / INFORMATION ON INGREDIENTS

No Reportable Hazardous Substance(s) or Complex Substance(s).

SECTION 3 HAZARDS IDENTIFICATION

This material is not considered to be hazardous according to regulatory guidelines (see (M)SDS Section 15).

POTENTIAL HEALTH EFFECTS

Low order of toxicity. Excessive exposure may result in eye, skin, or respiratory irritation. High-pressure injection under skin may cause serious damage.

NFPA Hazard ID:	Health: 0	Flammability: 1	Reactivity: 0
HMIS Hazard ID:	Health: 0	Flammability: 1	Reactivity: 0

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

SECTION 4 FIRST AID MEASURES

INHALATION

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use

Product Name: MOBIL DTE 25

Revision Date: 14Apr2008

Page 2 of 8

mouth-to-mouth resuscitation.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

SECTION 5

FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Inappropriate Extinguishing Media: Straight Streams of Water

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. Prevent runoff from fire control or dilution from entering streams, sewers, or drinking water supply. Firefighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Unusual Fire Hazards: Pressurized mists may form a flammable mixture.

Hazardous Combustion Products: Incomplete combustion products, Oxides of carbon, Smoke, Fume, Sulfur oxides, Aldehydes

FLAMMABILITY PROPERTIES

Flash Point [Method]: >200C (392F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

SECTION 6

ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations. In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations. US regulations require reporting releases of this material to the environment which exceed the applicable reportable quantity or oil spills which could reach any waterway including intermittent dry creeks. The National Response Center can be reached at (800)424-8802.

Product Name: MOBIL DTE 25

Revision Date: 14Apr2008

Page 3 of 8

SPILL MANAGEMENT

Land Spill: Stop leak if you can do it without risk. Recover by pumping or with suitable absorbent.

Water Spill: Stop leak if you can do it without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Large Spills: Dike far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

SECTION 7

HANDLING AND STORAGE

HANDLING

Prevent small spills and leakage to avoid slip hazard.

Static Accumulator: This material is a static accumulator.

STORAGE

Do not store in open or unlabelled containers.

SECTION 8

EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure limits/standards for materials that can be formed when handling this product: When mists / aerosols can occur, the following are recommended: 5 mg/m³ - ACGIH TLV, 10 mg/m³ - ACGIH STEL, 5 mg/m³ - OSHA PEL.

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Product Name: MOBIL DTE 25

Revision Date: 14Apr2008

Page 4 of 8

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapor warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practice good housekeeping.

ENVIRONMENTAL CONTROLS

See Sections 6, 7, 12, 13.

SECTION 9

PHYSICAL AND CHEMICAL PROPERTIES

Typical physical and chemical properties are given below. Consult the Supplier in Section 1 for additional data.

GENERAL INFORMATION

Physical State: Liquid

Color: Amber

Odor: Characteristic

Odor Threshold: N/D

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15 C): 0.876

Flash Point [Method]: >200C (392F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

Boiling Point / Range: > 316C (600F)

Vapor Density (Air = 1): > 2 at 101 kPa

Product Name: MOBIL DTE 25

Revision Date: 14Apr2008

Page 5 of 8

Vapor Pressure: < 0.013 kPa (0.1 mm Hg) at 20 C
Evaporation Rate (n-butyl acetate = 1): N/A
pH: N/A
Log Pow (n-Octanol/Water Partition Coefficient): > 3.5
Solubility in Water: Negligible
Viscosity: 46 cSt (46 mm²/sec) at 40 C
Oxidizing Properties: See Sections 3, 15, 16.

OTHER INFORMATION

Freezing Point: N/D
Melting Point: N/A
Pour Point: -18°C (0°F)
DMSO Extract (mineral oil only), IP-346: < 3 %wt

SECTION 10

STABILITY AND REACTIVITY

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

MATERIALS TO AVOID: Strong oxidizers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

HAZARDOUS POLYMERIZATION: Will not occur.

SECTION 11

TOXICOLOGICAL INFORMATION

ACUTE TOXICITY

Route of Exposure	Conclusion / Remarks
Inhalation	
Toxicity (Rat): LC50 > 5000 mg/m3	Minimally Toxic. Based on assessment of the components.
Irritation: No end point data.	Negligible hazard at ambient/normal handling temperatures. Based on assessment of the components.
Ingestion	
Toxicity (Rat): LD50 > 2000 mg/kg	Minimally Toxic. Based on test data for structurally similar materials.
Skin	
Toxicity (Rabbit): LD50 > 2000 mg/kg	Minimally Toxic. Based on test data for structurally similar materials.
Irritation (Rabbit): Data available.	Negligible irritation to skin at ambient temperatures. Based on assessment of the components.
Eye	
Irritation (Rabbit): Data available.	May cause mild, short-lasting discomfort to eyes. Based on assessment of the components.

CHRONIC/OTHER EFFECTS

Contains:

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-

Product Name: MOBIL DTE 25

Revision Date: 14Apr2008

Page 6 of 8

specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitizing in test animals.

Additional information is available by request.

The following ingredients are cited on the lists below: None.

--REGULATORY LISTS SEARCHED--

1 = NTP CARC

3 = IARC 1

5 = IARC 2B

2 = NTP SUS

4 = IARC 2A

6 = OSHA CARC

SECTION 12

ECOLOGICAL INFORMATION

The information given is based on data available for the material, the components of the material, and similar materials.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land. Expected to partition to sediment and wastewater solids.

PERSISTENCE AND DEGRADABILITY

Biodegradation:

Base oil component -- Expected to be inherently biodegradable

BIOACCUMULATION POTENTIAL

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

SECTION 13

DISPOSAL CONSIDERATIONS

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products.

REGULATORY DISPOSAL INFORMATION

RCRA Information: The unused product, in our opinion, is not specifically listed by the EPA as a hazardous waste (40 CFR, Part 261D), nor is it formulated to contain materials which are listed as hazardous wastes. It does not exhibit the hazardous characteristics of ignitability, corrosivity or reactivity and is not formulated with contaminants as determined by the Toxicity Characteristic Leaching Procedure (TCLP). However, used product may be regulated.

Product Name: MOBIL DTE 25

Revision Date: 14Apr2008

Page 7 of 8

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

SECTION 14

TRANSPORT INFORMATION

LAND (DOT) : Not Regulated for Land Transport

LAND (TDG) : Not Regulated for Land Transport

SEA (IMDG) : Not Regulated for Sea Transport according to IMDG-Code

AIR (IATA) : Not Regulated for Air Transport

SECTION 15

REGULATORY INFORMATION

OSHA HAZARD COMMUNICATION STANDARD: When used for its intended purposes, this material is not classified as hazardous in accordance with OSHA 29 CFR 1910.1200.

NATIONAL CHEMICAL INVENTORY LISTING: ENCS, AICS, IECSC, KECI, PICCS, TSCA, EINECS, DSL

EPCRA: This material contains no extremely hazardous substances.

SARA (311/312) REPORTABLE HAZARD CATEGORIES: None.

SARA (313) TOXIC RELEASE INVENTORY: This material contains no chemicals subject to the supplier notification requirements of the SARA 313 Toxic Release Program.

The Following Ingredients are Cited on the Lists Below:

Chemical Name	CAS Number	List Citations
ZINC ALKYL DITHIOPHOSPHATE	68649-42-3	15

--REGULATORY LISTS SEARCHED--

1 = ACGIH ALL	6 = TSCA 5a2	11 = CA P65 REPRO	16 = MN RTK
2 = ACGIH A1	7 = TSCA 5e	12 = CA RTK	17 = NJ RTK
3 = ACGIH A2	8 = TSCA 6	13 = IL RTK	18 = PA RTK
4 = OSHA Z	9 = TSCA 12b	14 = LA RTK	19 = RI RTK
5 = TSCA 4	10 = CA P65 CARC	15 = MI 293	

Code key: CARC=Carcinogen; REPRO=Reproductive

SECTION 16

OTHER INFORMATION

Product Name: MOBIL DTE 25

Revision Date: 14Apr2008

Page 8 of 8

N/D = Not determined, N/A = Not applicable

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

No revision information is available.

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, re-publication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

Internal Use Only

MHC: 0, 0, 0, 0, 0, 0

PPEC: A

DGN: 2007796XUS (1012764)

Copyright 2002 Exxon Mobil Corporation, All rights reserved

Product Name: MOBIL DTE OIL LIGHT
Revision Date: 13 Nov 2009
Page 1 of 9

MATERIAL SAFETY DATA SHEET

SECTION 1	PRODUCT AND COMPANY IDENTIFICATION
------------------	---

PRODUCT

Product Name: MOBIL DTE OIL LIGHT
Product Description: Base Oil and Additives
Product Code: 600148-00, 970294
Intended Use: Turbine oil

COMPANY IDENTIFICATION

Supplier:	EXXON MOBIL CORPORATION 3225 GALLOWS RD. FAIRFAX, VA. 22037	USA
24 Hour Health Emergency		609-737-4411
Transportation Emergency Phone		800-424-9300
ExxonMobil Transportation No.		281-834-3296
Product Technical Information		800-662-4525, 800-947-9147
MSDS Internet Address		http://www.exxon.com , http://www.mobil.com

SECTION 2	COMPOSITION / INFORMATION ON INGREDIENTS
------------------	---

No Reportable Hazardous Substance(s) or Complex Substance(s).

SECTION 3	HAZARDS IDENTIFICATION
------------------	-------------------------------

This material is not considered to be hazardous according to regulatory guidelines (see (M)SDS Section 15).

POTENTIAL HEALTH EFFECTS

Low order of toxicity. Excessive exposure may result in eye, skin, or respiratory irritation. High-pressure injection under skin may cause serious damage.

NFPA Hazard ID:	Health: 0	Flammability: 1	Reactivity: 0
HMIS Hazard ID:	Health: 0	Flammability: 1	Reactivity: 0

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

SECTION 4	FIRST AID MEASURES
------------------	---------------------------

Inhalation

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use

Product Name: MOBIL DTE OIL LIGHT

Revision Date: 13 Nov 2009

Page 2 of 9

mouth-to-mouth resuscitation.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

Ingestion

First aid is normally not required. Seek medical attention if discomfort occurs.

SECTION 5

FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Inappropriate Extinguishing Media: Straight Streams of Water

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. Prevent runoff from fire control or dilution from entering streams, sewers, or drinking water supply. Firefighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Hazardous Combustion Products: Smoke, Fume, Aldehydes, Sulfur Oxides, Incomplete combustion products, Oxides of carbon

FLAMMABILITY PROPERTIES

Flash Point [Method]: >200C (392F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

SECTION 6

ACCIDENTAL RELEASE MEASURES

Notification Procedures

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations. US regulations require reporting releases of this material to the environment which exceed the applicable reportable quantity or oil spills which could reach any waterway including intermittent dry creeks. The National Response Center can be reached at (800)424-8802.

SPILL MANAGEMENT

Product Name: MOBIL DTE OIL LIGHT

Revision Date: 13 Nov 2009

Page 3 of 9

Land Spill: Stop leak if you can do it without risk. Recover by pumping or with suitable absorbent.

Water Spill: Stop leak if you can do it without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Large Spills: Dike far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

SECTION 7

HANDLING AND STORAGE

HANDLING

Prevent small spills and leakage to avoid slip hazard.

Static Accumulator: This material is a static accumulator.

STORAGE

Do not store in open or unlabelled containers. Keep away from incompatible materials.

SECTION 8

EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure limits/standards for materials that can be formed when handling this product: When mists / aerosols can occur, the following are recommended: 5 mg/m³ - ACGIH TLV, 10 mg/m³ - ACGIH STEL, 5 mg/m³ - OSHA PEL.

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

Personal Protection

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator

Product Name: MOBIL DTE OIL LIGHT

Revision Date: 13 Nov 2009

Page 4 of 9

selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapor warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practice good housekeeping.

ENVIRONMENTAL CONTROLS

See Sections 6, 7, 12, 13.

SECTION 9

PHYSICAL AND CHEMICAL PROPERTIES

Typical physical and chemical properties are given below. Consult the Supplier in Section 1 for additional data.

GENERAL INFORMATION

Physical State: Liquid

Color: Amber

Odor: Characteristic

Odor Threshold: N/D

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15 C): 0.869

Flash Point [Method]: >200C (392F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

Boiling Point / Range: > 316C (600F)

Vapor Density (Air = 1): > 2 at 101 kPa

Vapor Pressure: < 0.013 kPa (0.1 mm Hg) at 20 C

Evaporation Rate (N-Butyl Acetate = 1): N/D

pH: N/A

Product Name: MOBIL DTE OIL LIGHT

Revision Date: 13 Nov 2009

Page 5 of 9

Log Pow (n-Octanol/Water Partition Coefficient): > 3.5

Solubility in Water: Negligible

Viscosity: 31 cSt (31 mm²/sec) at 40 C | 5.5 cSt (5.5 mm²/sec) at 100C

Oxidizing Properties: See Sections 3, 15, 16.

OTHER INFORMATION

Freezing Point: N/D

Melting Point: N/A

Pour Point: -18°C (0°F)

DMSO Extract (mineral oil only), IP-346: < 3 %wt

SECTION 10

STABILITY AND REACTIVITY

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

MATERIALS TO AVOID: Strong oxidizers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

HAZARDOUS POLYMERIZATION: Will not occur.

SECTION 11

TOXICOLOGICAL INFORMATION

ACUTE TOXICITY

Route of Exposure	Conclusion / Remarks
Inhalation	
Toxicity (Rat): LC50 > 5000 mg/m ³	Minimally Toxic. Based on test data for structurally similar materials.
Irritation: No end point data.	Negligible hazard at ambient/normal handling temperatures. Based on assessment of the components.
Ingestion	
Toxicity (Rat): LD50 > 5000 mg/kg	Minimally Toxic. Based on test data for structurally similar materials.
Skin	
Toxicity (Rabbit): LD50 > 5000 mg/kg	Minimally Toxic. Based on test data for structurally similar materials.
Irritation (Rabbit): Data available.	Negligible irritation to skin at ambient temperatures. Based on test data for structurally similar materials.
Eye	
Irritation (Rabbit): Data available.	May cause mild, short-lasting discomfort to eyes. Based on test data for structurally similar materials.

CHRONIC/OTHER EFFECTS

Contains:

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitizing in test animals.

Product Name: MOBIL DTE OIL LIGHT

Revision Date: 13 Nov 2009

Page 6 of 9

Additional information is available by request.

The following ingredients are cited on the lists below: None.

--REGULATORY LISTS SEARCHED--

1 = NTP CARC

3 = IARC 1

5 = IARC 2B

2 = NTP SUS

4 = IARC 2A

6 = OSHA CARC

SECTION 12

ECOLOGICAL INFORMATION

The information given is based on data available for the material, the components of the material, and similar materials.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land.
Expected to partition to sediment and wastewater solids.

PERSISTENCE AND DEGRADABILITY

Biodegradation:

Base oil component -- Expected to be inherently biodegradable

BIOACCUMULATION POTENTIAL

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

SECTION 13

DISPOSAL CONSIDERATIONS

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products.

REGULATORY DISPOSAL INFORMATION

RCRA Information: The unused product, in our opinion, is not specifically listed by the EPA as a hazardous waste (40 CFR, Part 261D), nor is it formulated to contain materials which are listed as hazardous wastes. It does not exhibit the hazardous characteristics of ignitability, corrosivity or reactivity and is not formulated with contaminants as determined by the Toxicity Characteristic Leaching Procedure (TCLP). However, used product may be regulated.

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be

Product Name: MOBIL DTE OIL LIGHT

Revision Date: 13 Nov 2009

Page 7 of 9

completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

SECTION 14	TRANSPORT INFORMATION
-------------------	------------------------------

LAND (DOT) : Not Regulated for Land Transport

LAND (TDG) : Not Regulated for Land Transport

SEA (IMDG) : Not Regulated for Sea Transport according to IMDG-Code

AIR (IATA) : Not Regulated for Air Transport

SECTION 15	REGULATORY INFORMATION
-------------------	-------------------------------

OSHA HAZARD COMMUNICATION STANDARD: When used for its intended purposes, this material is not classified as hazardous in accordance with OSHA 29 CFR 1910.1200.

NATIONAL CHEMICAL INVENTORY LISTING: AICS, IECSC, DSL, EINECS, PICCS, TSCA

EPCRA: This material contains no extremely hazardous substances.

SARA (311/312) REPORTABLE HAZARD CATEGORIES: None.

SARA (313) TOXIC RELEASE INVENTORY: This material contains no chemicals subject to the supplier notification requirements of the SARA 313 Toxic Release Program.

The following ingredients are cited on the lists below:

Chemical Name	CAS Number	List Citations
DIPHENYLAMINE	122-39-4	5
PHOSPHORODITHOIC ACID, O,O-DI C1-14-ALKYL ESTERS, ZINC SALTS (2:1) (ZDDP)	68649-42-3	15

--REGULATORY LISTS SEARCHED--

1 = ACGIH ALL	6 = TSCA 5a2	11 = CA P65 REPRO	16 = MN RTK
2 = ACGIH A1	7 = TSCA 5e	12 = CA RTK	17 = NJ RTK
3 = ACGIH A2	8 = TSCA 6	13 = IL RTK	18 = PA RTK
4 = OSHA Z	9 = TSCA 12b	14 = LA RTK	19 = RI RTK
5 = TSCA 4	10 = CA P65 CARC	15 = MI 293	

Product Name: MOBIL DTE OIL LIGHT

Revision Date: 13 Nov 2009

Page 8 of 9

Code key: CARC=Carcinogen; REPRO=Reproductive

SECTION 16

OTHER INFORMATION

N/D = Not determined, N/A = Not applicable

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

Revision Changes:

Section 04: First Aid Inhalation - Header was modified.

Section 04: First Aid Ingestion - Header was modified.

Section 06: Notification Procedures - Header was modified.

Section 10 Stability and Reactivity - Header was modified.

Section 13: Disposal Recommendations - Note was modified.

Section 09: Evaporation Rate - Header was modified.

Section 08: Personal Protection - Header was modified.

Section 08: Personal Protection was modified.

Section 07: Handling and Storage - Handling was modified.

Section 07: Handling and Storage - Storage Phrases was modified.

Section 11: Dermal Lethality Test Data was modified.

Section 11: Oral Lethality Test Data was modified.

Section 11: Inhalation Lethality Test Data was modified.

Section 05: Hazardous Combustion Products was modified.

Section 06: Accidental Release - Spill Management - Water was modified.

Section 09: Relative Density - Header was modified.

Section 09: Viscosity was modified.

Section 09: Viscosity was modified.

Section 15: List Citations Table was modified.

Section 15: List Citation Table - Header was modified.

Section 15: National Chemical Inventory Listing was modified.

Section 16: Code to MHCs was modified.

Section 08: Exposure limits/standards was modified.

Hazard Identification: OSHA - May be Hazardous Statement was modified.

Section 06: Notification Procedures was modified.

Section 01: Company Contact Methods Sorted by Priority was modified.

Section 12: Ecological Information - Acute Aquatic Toxicity was added.

Section 12: Ecological Information - Acute Aquatic Toxicity was added.

Hazard Identification: Environmental Hazard was deleted.

Hazard Identification: Environmental Hazard - Header was deleted.

Section 12: Ecological Information - Acute Aquatic Toxicity was deleted.

Section 12: Ecological Information - Acute Aquatic Toxicity was deleted.

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, re-publication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any



Product Name: MOBIL DTE OIL LIGHT

Revision Date: 13 Nov 2009

Page 9 of 9

affiliates in which they directly or indirectly hold any interest.

Internal Use Only

MHC: 0B, 0B, 0, 0, 0, 0

PPEC: A

DGN: 2007057XUS (538877)

Copyright 2002 Exxon Mobil Corporation, All rights reserved

Page 1 of 8

COMPANY IDENTITY: Univar
PRODUCT IDENTITY: SULFURIC ACID 93%
SDS NUMBER: CDS-2441

SDS DATE: 01/15/2015
ORIGINAL: 01/15/2015

SAFETY DATA SHEET

This Safety Data Sheet conforms to ANSI Z400.5, and to the format requirements of the Global Harmonizing System.
THIS SDS COMPLIES WITH 29 CFR 1910.1200 (HAZARD COMMUNICATION STANDARD)
IMPORTANT: Read this SDS before handling & disposing of this product.
Pass this information on to employees, customers, & users of this product.

SECTION 1. IDENTIFICATION OF THE SUBSTANCE OR MIXTURE AND OF THE SUPPLIER

PRODUCT IDENTITY: SULFURIC ACID 93%
PRODUCT USES: Mineral Acid

COMPANY IDENTITY: Univar
COMPANY ADDRESS: 17425 NE Union Hill Road
COMPANY CITY: Redmond, WA 98052
COMPANY PHONE: 1-425-889-3400
EMERGENCY PHONES: CHEMTREC: 1-800-424-9300 (USA)
CANUTEC: 1-613-996-6666 (CANADA)

SECTION 2. HAZARDS IDENTIFICATION

DANGER!!

2.1 HAZARD STATEMENTS: (CAT = Hazard Category)

(H200s) PHYSICAL: Corrosive To Metals:
H290 MAY BE CORROSIVE TO METALS.(CAT:1)
(H300s) HEALTH: Skin Corrosion/Irritation:
H314 CAUSES SEVERE SKIN BURNS AND EYE DAMAGE.(CAT:1)
(H300s) HEALTH: Acute Toxicity, Inhalation:
H332 HARMFUL IF INHALED.(CAT:4)



2.2 PRECAUTIONARY STATEMENTS:

EXPOSURE PREVENTION: AVOID ALL CONTACT!
PREVENT DISPERSION OF MISTS OR DUST!

P100s = General, P200s = Prevention,
P300s = Response, P400s = Storage, P500s = Disposal
P234 Keep only in original container.
P260 Do not breathe dust/fume/gas/mist/vapors/spray.
P262 Do not get in eyes, on skin, or on clothing.
P264 Wash hands thoroughly after handling.
P280 Wear protective gloves/protective clothing/eye protection/face protection.
P301+330+331 IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
P303+361+353 IF ON SKIN (OR HAIR): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304+340 IF INHALED: Remove victim to fresh air & keep at rest in a position comfortable for breathing.
P305+351+338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present & easy to do - Continue rinsing.
P310 Immediately call a POISON CENTER or doctor/physician.
P363 Wash contaminated clothing before reuse.
P390 Absorb spillage to prevent material damage.
P404 Store in a closed container.
P405 Store locked up.
P501 Dispose of contents/container to an approved waste disposal plant.

SEE SECTIONS 8, 11 & 12 FOR TOXICOLOGICAL INFORMATION.

Page 2 of 8

COMPANY IDENTITY: Univar
PRODUCT IDENTITY: SULFURIC ACID 93%
SDS NUMBER: CDS-2441

SDS DATE: 01/15/2015
ORIGINAL: 01/15/2015

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

MATERIAL	CAS#	EINECS#	WT %
Sulfuric Acid	7664-93-9	231-639-5	93
Water	7732-18-5	231-791-2	7

TRACE COMPONENTS: Trace ingredients (if any) are present in < 1% concentration, (< 0.1% for potential carcinogens, reproductive toxins, respiratory tract mutagens, and sensitizers). None of the trace ingredients contribute significant additional hazards at the concentrations that may be present in this product. All pertinent hazard information has been provided in this document, per the requirements of the Federal Occupational Safety and Health Administration Standard (29 CFR 1910.1200), U.S. State equivalents, and Canadian Hazardous Materials Identification System Standard (CPR 4).

SECTION 4. FIRST AID MEASURES

- 4.1 MOST IMPORTANT SYMPTOMS/EFFECTS, ACUTE & CHRONIC:
See Section 11 for symptoms/effects, acute & chronic.
- 4.2 GENERAL ADVICE:
First Aid responders should pay attention to self-protection and use the recommended protective clothing (chemical resistant gloves, splash protection). If potential for exposure exists, refer to Section 8 for specific personal protective equipment.
- 4.3 EYE CONTACT:
If this product enters the eyes, check for and remove any contact lenses. Open eyes while under gently running water. Use sufficient force to open eyelids. "Roll" eyes to expose more surface. Minimum flushing is for 15 minutes. Seek immediate medical attention.
- 4.4 SKIN CONTACT:
If the product contaminates the skin, immediately begin decontamination with running water. Minimum flushing is for 15 minutes. Remove contaminated clothing, taking care not to contaminate eyes. If skin becomes irritated and irritation persists, medical attention may be necessary. Wash contaminated clothing before reuse, discard contaminated shoes.
- 4.5 INHALATION:
After high vapor exposure, remove to fresh air. If breathing is difficult, give oxygen. If breathing has stopped, trained personnel should immediately begin artificial respiration. If the heart has stopped, trained personnel should immediately begin cardiopulmonary resuscitation (CPR). Seek immediate medical attention.
- 4.6 SWALLOWING:
If swallowed, CALL PHYSICIAN OR POISON CONTROL CENTER FOR MOST CURRENT INFORMATION. If professional advice is not available, give two glasses of water to drink. DO NOT INDUCE VOMITING. Never induce vomiting or give liquids to someone who is unconscious, having convulsions, or unable to swallow. Seek immediate medical attention.
- 4.7 RESCUERS: Victims of chemical exposure must be taken for medical attention. Rescuers should be taken for medical attention, if necessary. Take a copy of label and SDS to physician or health professional with victim.
- 4.8 NOTES TO PHYSICIAN:
There is no specific antidote. Treatment of overexposure should be directed at the control of symptoms and the clinical condition of the patient. Any material aspirated during vomiting may cause lung injury. Therefore, emesis should not be induced mechanically or pharmacologically. If it is considered necessary to evacuate the stomach contents, this should be done by means least likely to cause aspiration (such as: Gastric lavage after endotracheal intubation).

SECTION 5. FIRE FIGHTING MEASURES

- 5.1 FIRE & EXPLOSION PREVENTIVE MEASURES:
Isolate from alkalies, oxidizers, organics, extreme heat and open flames.
- 5.2 SUITABLE (& UNSUITABLE) EXTINGUISHING MEDIA:
Use extinguishing agent appropriate for surrounding fire.
- 5.3 SPECIAL PROTECTIVE EQUIPMENT & PRECAUTIONS FOR FIRE FIGHTERS:
Water spray may be ineffective on fire but can protect fire-fighters & cool closed containers. Use fog nozzles if water is used.
Do not enter confined fire-space without full bunker gear.
(Helmet with face shield, bunker coats, gloves & rubber boots).

COMPANY IDENTITY: Univar
PRODUCT IDENTITY: SULFURIC ACID 93%
SDS NUMBER: CDS-2441

SDS DATE: 01/15/2015
ORIGINAL: 01/15/2015

SECTION 5. FIRE FIGHTING MEASURES (CONTINUED)

5.4 SPECIFIC HAZARDS OF CHEMICAL & HAZARDOUS COMBUSTION PRODUCTS:

SLIGHTLY COMBUSTIBLE!

Reacts with most metals producing hydrogen which is extremely flammable & may explode. Keep container tightly closed. Isolate from oxidizers, alkalis, heat, & open flame. Applying to hot surfaces requires special precautions. Closed containers may explode if exposed to extreme heat. Continue all label precautions!

SECTION 6. ACCIDENTAL RELEASE MEASURES

6.1 SPILL AND LEAK RESPONSE AND ENVIRONMENTAL PRECAUTIONS:

Uncontrolled releases should be responded to by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a spill, clear the affected area, protect people, and respond with trained personnel. ELIMINATE all ignition sources (no smoking, flares, sparks, or flames in immediate area). Prevent additional discharge of material, if possible to do so without hazard. For large spill, implement cleanup procedures and, if in public area, advise authorities.

6.2 PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT, EMERGENCY PROCEDURES:

The proper personal protective equipment for incidental releases (such as: 1 Liter of the product released in a well-ventilated area), use impermeable gloves, they should be Level B: triple-gloves (rubber gloves and nitrile gloves over latex gloves), chemical resistant suit and boots, hard-hat, and Self-Contained Breathing Apparatus specific for the material handled, goggles, face shield, and appropriate body protection. In the event of a large release, use impermeable gloves, specific for the material handled, chemically resistant suit and boots, and hard hat. Self-Contained Breathing Apparatus or respirator may be required where engineering controls are not adequate or conditions for potential exposure exist. When respirators are required, select NIOSH/MSHA approved based on actual or potential airborne concentrations in accordance with latest OSHA and/or ANSI recommendations.

6.3 ENVIRONMENTAL PRECAUTIONS:

Stop spill at source. Construct temporary dikes of dirt, sand, or any appropriate readily available material to prevent spreading of the material. Close or cap valves and/or block or plug hole in leaking container and transfer to another container. Keep from entering storm sewers and ditches which lead to waterways, and if necessary, call the local fire or police department for immediate emergency assistance.

6.4 METHODS AND MATERIAL FOR CONTAINMENT & CLEAN-UP:

Absorb spilled liquid with polypads or other suitable absorbent materials. If necessary, neutralize using suitable buffering material, (acid with soda ash or base with phosphoric acid), and test area with litmus paper to confirm neutralization. Clean up with non-combustible absorbent (such as: sand, soil, and so on). Shovel up and place all spill residue in suitable containers. dispose of at an appropriate waste disposal facility according to current applicable laws and regulations and product characteristics at time of disposal (see Section 13 - Disposal Considerations).

SECTION 7. HANDLING AND STORAGE

7.1 PRECAUTIONS FOR SAFE HANDLING:

Isolate from oxidizers, alkalis, heat, & open flame. Use only with adequate ventilation. Do not get in eyes, on skin or clothing. Wear OSHA Standard full face shield. Consult Safety Equipment Supplier. Wear goggles, face shield, gloves, apron & footwear impervious to material. Wash clothing before reuse. Continue all label precautions! NEVER pour water into this substance. When dissolving or diluting, always add it slowly to the water.

7.2 CONDITIONS FOR SAFE STORAGE, INCLUDING ANY INCOMPATIBILITIES:

Keep separated from strong oxidants, strong bases, combustible & reducing substances, metals, food & feedstuffs, incompatible materials. May be stored in stainless steel containers. See: Section 10, <Materials to Avoid>. Do not store above 49 C/120 F. Keep container tightly closed & upright when not in use to prevent leakage. Reacts with most metals producing hydrogen which is extremely flammable & may explode. Wear full face shield, gloves & full protective clothing when opening or handling. When empty, drain completely, replace bungs securely.

7.3 NONBULK: CONTAINERS:

Store containers in a cool, dry location, away from direct sunlight, sources of intense heat, or where freezing is possible. Material should be stored in secondary containers or in a diked area, as appropriate. Store containers away from incompatible chemicals (see Section 10, Stability and Reactivity). Post warning and "NO SMOKING" signs in storage and use areas, as appropriate. Empty containers should be handled with care. Never store food, feed, or drinking water in containers which held this product.

Page 4 of 8

COMPANY IDENTITY: Univar
PRODUCT IDENTITY: SULFURIC ACID 93%
SDS NUMBER: CDS-2441

SDS DATE: 01/15/2015
ORIGINAL: 01/15/2015

SECTION 7. HANDLING AND STORAGE (CONTINUED)

7.4 BULK CONTAINERS:

All tanks and pipelines which contain this material must be labeled. Perform routine maintenance on tanks or pipelines which contain this product. Report all leaks immediately to the proper personnel.

7.5 TANK CAR SHIPMENTS:

Tank cars carrying this product should be loaded and unloaded in strict accordance with tank-car manufacturer's recommendation and all established on-site safety procedures. Appropriate personal protective equipment must be used (see Section 8, Engineering Controls and Personal Protective Equipment.). All loading and unloading equipment must be inspected, prior to each use. Loading and unloading operations must be attended, at all times. Tank cars must be level, brakes must be set or wheels must be locked or blocked prior to loading or unloading. Tank car (for loading) or storage tanks (for unloading) must be verified to be correct for receiving this product and be properly prepared, prior to starting the transfer operations. Hoses must be verified to be in the correct positions, before starting transfer operations. A sample (if required) must be taken and verified (if required) prior to starting transfer operations. All lines must be blown-down and purged before disconnecting them from the tank car or vessel.

7.6 PROTECTIVE PRACTICES DURING MAINTENANCE OF CONTAMINATED EQUIPMENT:

Follow practices indicated in Section 6 (Accidental Release Measures). Make certain application equipment is locked and tagged-out safely. Always use this product in areas where adequate ventilation is provided. Collect all rinsates and dispose of according to applicable Federal, State, Provincial, or local procedures.

7.7 EMPTY CONTAINER WARNING:

Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. **DO NOT PRESSURIZE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY BURST AND CAUSE INJURY OR DEATH.**

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 EXPOSURE LIMITS:

MATERIAL	CAS#	EINECS#	TWA (OSHA)	TLV (ACGIH)	IDLH (NIOSH)
Sulfuric Acid	7664-93-9	231-639-5	1.0 mg/m ³	1.0 mg/m ³	15 mg/m ³
Water	7732-18-5	231-791-2	None Known	None Known	

This product contains no EPA Hazardous Air Pollutants (HAP) in amounts > 0.1%.

8.2 APPROPRIATE ENGINEERING CONTROLS:

RESPIRATORY EXPOSURE CONTROLS

Airborne concentrations should be kept to lowest levels possible. If vapor, dust or mist is generated and the occupational exposure limit of the product, or any component of the product, is exceeded, use appropriate NIOSH or MSHA approved air purifying or air-supplied respirator authorized in 29 CFR 1910.134, European Standard EN 149, or applicable State regulations, after determining the airborne concentration of the contaminant. Air supplied respirators should always be worn when airborne concentration of the contaminant or oxygen content is unknown. Maintain airborne contaminant concentrations below exposure limits. If adequate ventilation is not available or there is potential for airborne exposure above the exposure limits, a respirator may be worn up to the respirator exposure limitations, check with respirator equipment manufacturer's recommendations/limitations. For particulates, a particulate respirator (NIOSH Type N95 or better filters) may be worn. If oil particles (such as: lubricants, cutting fluids, glycerine, and so on) are present, use a NIOSH Type R or P filter. For a higher level of protection, use positive pressure supplied air respiration protection or Self-Contained Breathing Apparatus or if oxygen levels are below 19.5% or are unknown.

EMERGENCY OR PLANNED ENTRY INTO UNKNOWN CONCENTRATIONS OR IDLH CONDITIONS

Positive pressure, full-face piece Self-Contained Breathing Apparatus; or positive pressure, full-face piece Self-Contained Breathing Apparatus with an auxilliary positive pressure Self-Contained Breathing Apparatus.

Page 5 of 8

COMPANY IDENTITY: Univar
PRODUCT IDENTITY: SULFURIC ACID 93%
SDS NUMBER: CDS-2441

SDS DATE: 01/15/2015
ORIGINAL: 01/15/2015

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION (CONTINUED)

VENTILATION

LOCAL EXHAUST: Necessary MECHANICAL (GENERAL): Necessary
SPECIAL: None OTHER: None
Please refer to ACGIH document, "Industrial Ventilation, A Manual of Recommended Practices", most recent edition, for details.

8.3 INDIVIDUAL PROTECTION MEASURES, SUCH AS PERSONAL PROTECTIVE EQUIPMENT:

EYE PROTECTION:

Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts. If contact is possible, chemical splash goggles should be worn, when a higher degree of protection is necessary, use splash goggles or safety glasses. Face-shields are recommended when the operation can generate splashes, sprays or mists.

HAND PROTECTION:

Use gloves chemically resistant to this material. Preferred examples: Butyl rubber, Chlorinated Polyethylene, Polyethylene, Ethyl vinyl alcohol laminate ("EVAL"), Polyvinyl alcohol ("PVA"). Examples of acceptable glove barrier materials include: Natural rubber ("latex"), Neoprene, Nitrile/butadiene rubber ("nitril" or "NBR"), Polyvinyl chloride ("PVC") or "vinyl", Viton. Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

BODY PROTECTION:

Use body protection appropriate for task. Cover-all, rubber aprons, or chemical protective clothing made from impervious materials are generally acceptable, depending on the task.

WORK & HYGIENIC PRACTICES:

Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using toilet facilities and at the end of the working period. Provide readily accessible eye wash stations & safety showers. Remove clothing that becomes contaminated. Destroy contaminated leather articles. Launder or discard contaminated clothing.

SECTION 9. PHYSICAL & CHEMICAL PROPERTIES

APPEARANCE:	Oily Liquid, Water-White to slightly yellow
ODOR:	None
ODOR THRESHOLD:	Not Available
pH (Neutrality):	< 1
MELTING POINT/FREEZING POINT:	-29 C / -20 F
BOILING RANGE (IBP,Dry Point):	276 to 281 C / 528 to 538 F
FLASH POINT (TEST METHOD):	Not Applicable
EVAPORATION RATE (n-Butyl Acetate=1):	Not Applicable
FLAMMABILITY CLASSIFICATION:	Noncombustible
LOWER FLAMMABLE LIMIT IN AIR (% by vol):	10.0 (Lowest Component)
UPPER FLAMMABLE LIMIT IN AIR (% by vol):	Not Available
VAPOR PRESSURE (mm of Hg)@20 C	< 0.3
VAPOR DENSITY (air=1):	3.4
GRAVITY @ 68/68F / 20/20C:	
DENSITY:	1.830
SPECIFIC GRAVITY (Water=1):	1.835
POUNDS/GALLON:	15.3
WATER SOLUBILITY:	Complete
PARTITION COEFFICIENT (n-Octane/Water):	Not Available
AUTO IGNITION TEMPERATURE:	Not Applicable
DECOMPOSITION TEMPERATURE:	Not Available
VOCs (>0.044 Lbs/Sq In) :	0.0 Vol% /0.0 g/L / 0.000 Lbs/Gal
TOTAL VOC'S (TVOC)*:	0.0 Vol% /0.0 g/L / 0.000 Lbs/Gal
NONEXEMPT VOC'S (CVOC)*:	0.0 Vol% /0.0 g/L / 0.000 Lbs/Gal
HAZARDOUS AIR POLLUTANTS (HAPS):	0.0 Wt% /0.0 g/L / 0.000 Lbs/Gal
NONEXEMPT VOC PARTIAL PRESSURE (mm of Hg @ 20 C)	0.0
VISCOSITY @ 100 C (ASTM D445) 514.0	
VISCOSITY @ 20 C (ASTM D445):	Not Available

* Using CARB (California Air Resources Board Rules).

Page 6 of 8

COMPANY IDENTITY: Univar
PRODUCT IDENTITY: SULFURIC ACID 93%
SDS NUMBER: CDS-2441

SDS DATE: 01/15/2015
ORIGINAL: 01/15/2015

SECTION 10. STABILITY & REACTIVITY

10.1 REACTIVITY & CHEMICAL STABILITY:

Stable under normal conditions, but Reacts with most metals producing hydrogen which is extremely flammable & may explode.

10.2 POSSIBILITY OF HAZARDOUS REACTIONS & CONDITIONS TO AVOID:

Isolate from sources of ignition, heat, & open flame. Reacts vigorously with water.

10.3 INCOMPATIBLE MATERIALS:

The substance is a strong acid, reacts violently with bases and is corrosive. Upon heating, irritating and toxic fumes are formed including sulfur oxides. The substance is a strong oxidant & reacts violently with combustible & reducing materials. Corrosive to most common metals, forming flammable/explosive gas (hydrogen). Sulfuric acid reacts violently with water & organic materials with much heat. Hazardous gases are evolved on contact with chemicals such as cyanides, sulfides, and carbides.

10.4 HAZARDOUS DECOMPOSITION PRODUCTS:

Upon heating, irritating and toxic fumes are formed including sulfur oxides.

10.5 HAZARDOUS POLYMERIZATION:

Will not occur.

SECTION 11. TOXICOLOGICAL INFORMATION

11.1 ACUTE HAZARDS

11.11 EYE & SKIN CONTACT:

Severe burns to skin, defatting, dermatitis.
Animal testing indicates this material is corrosive to the eye.
Severe burns to eyes, redness, tearing, blurred vision.
Liquid can cause severe skin & eye burns. Wash thoroughly after handling.

11.12 INHALATION:

Severe respiratory tract irritation may occur. Vapor harmful.

11.13 SWALLOWING:

Harmful or fatal if swallowed.

11.2 SUBCHRONIC HAZARDS/CONDITIONS AGGRAVATED

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE:

Pre-existing disorders of any target organs mentioned in this Document can be aggravated by over-exposure by routes of entry to components of this product. Persons with these disorders should avoid use of this product.

11.3 CHRONIC HAZARDS

11.31 CANCER, REPRODUCTIVE & OTHER CHRONIC HAZARDS:

PROVEN Carcinogen, Human, Group 1 (IARC), SUSPECTED Carcinogen, Human, Group A2 (ACGIH).

11.32 TARGET ORGANS: May cause damage to target organs, based on animal data.

11.33 IRRITANCY: Irritating to contaminated tissue.

11.34 SENSITIZATION: No component is known as a sensitizer.

11.35 MUTAGENICITY: No known reports of mutagenic effects in humans.

11.36 EMBRYOTOXICITY: No known reports of embryotoxic effects in humans.

11.37 TERATOGENICITY: No known reports of teratogenic effects in humans.

11.38 REPRODUCTIVE TOXICITY: No known reports of reproductive effects in humans.

Page 7 of 8

COMPANY IDENTITY: Univar
PRODUCT IDENTITY: SULFURIC ACID 93%
SDS NUMBER: CDS-2441

SDS DATE: 01/15/2015
ORIGINAL: 01/15/2015

SECTION 11. TOXICOLOGICAL INFORMATION (CONTINUED)

A MUTAGEN is a chemical which causes permanent changes to genetic material (DNA) such that the changes will propagate across generational lines. An EMBRYOTOXIN is a chemical which causes damage to a developing embryo (such as: within the first 8 weeks of pregnancy in humans), but the damage does not propagate across generational lines. A TERATOGEN is a chemical which causes damage to a developing fetus, but the damage does not propagate across generational lines. A REPRODUCTIVE TOXIN is any substance which interferes in any way with the reproductive process.

11.4 MAMMALIAN TOXICITY INFORMATION

LD50 (Oral, Acute): 2140 mg/kg (Rat)
LC50 / 2 hours: 510 mg/m³ (Rat), 320 mg/m³ (Mouse)

SECTION 12. ECOLOGICAL INFORMATION

12.1 ALL WORK PRACTICES MUST BE AIMED AT ELIMINATING ENVIRONMENTAL CONTAMINATION.

12.2 EFFECT OF MATERIAL ON PLANTS AND ANIMALS:

This product may be harmful or fatal to plant and animal life if released into the environment. Refer to Section 11 (Toxicological Information) for further data on the effects of this product's components on test animals.

12.3 EFFECT OF MATERIAL ON AQUATIC LIFE:

The substance is harmful to aquatic organisms.

LC50 / 48 hours: 49 mg/L, Tap Water, 20 C (Bluegill sunfish)

LC50 / 48 hours: 100 - 330 mg/L, Aerated Water (Flounder)

12.4 MOBILITY IN SOIL

Mobility of this material has not been determined.

12.5 DEGRADABILITY

This product is completely biodegradable.

12.6 ACCUMULATION

Bioaccumulation of this product has not been determined.

SECTION 13. DISPOSAL CONSIDERATIONS

Processing, use or contamination may change the waste disposal requirements. Do not dispose of on land, in surface waters, or in storm drains. Waste should be recycled or disposed of in accordance with regulations. Large amounts should be collected for reuse or consigned to licensed hazardous waste haulers for disposal.

ALL DISPOSAL MUST BE IN ACCORDANCE WITH ALL FEDERAL, STATE, PROVINCIAL, AND LOCAL REGULATIONS. IF IN DOUBT, CONTACT PROPER AGENCIES. EPA CHARACTERISTIC: D002

SECTION 14. TRANSPORT INFORMATION

MARINE POLLUTANT: No
DOT/TDG SHIP NAME: UN1830, Sulfuric acid, 8, PG-II
DRUM LABEL: (CORROSIVE)
IATA / ICAO: UN1830, Sulfuric acid, 8, PG-II
IMO / IMDG: UN1830, Sulfuric acid, 8, PG-II
EMERGENCY RESPONSE GUIDEBOOK NUMBER: 137



Page 8 of 8

COMPANY IDENTITY: Univar
PRODUCT IDENTITY: SULFURIC ACID 93%
SDS NUMBER: CDS-2441

SDS DATE: 01/15/2015
ORIGINAL: 01/15/2015

SECTION 15. REGULATORY INFORMATION

15.1 EPA REGULATION:

SARA SECTION 311/312 HAZARDS: Acute Health, Chronic Health, Reactivity

All components of this product are on the TSCA list.

SARA Title III Section 313 Supplier Notification

This product contains the indicated <*> toxic chemicals subject to the reporting requirements of Section 313 of the Emergency Planning & Community Right-To-Know Act of 1986 & of 40 CFR 372. This information must be included in all MSDSs that are copied and distributed for this material.

SARA TITLE III INGREDIENTS	CAS#	EINECS#	WT%	(REG.SECTION)	RQ(LBS)
*Sulfuric Acid	7664-93-9	231-639-5	93	(302,311,312,313)	1000

15.2 STATE REGULATIONS:

CALIFORNIA SAFE DRINKING WATER & TOXIC ENFORCEMENT ACT (PROPOSITION 65):

This product contains no chemicals known to the State of California to cause cancer or reproductive toxicity.

15.3 INTERNATIONAL REGULATIONS

The identified components of this product are listed on the chemical inventories of the following countries:

Australia (AICS), Canada (DSL or NDSL), China (IECSC), Europe (EINECS, ELINCS), Japan (METI/CSCL, MHLW/ISHL), South Korea (KECI), New Zealand (NZIoC), Philippines (PICCS), Switzerland (SWISS), Taiwan (NECSI), USA (TSCA).

15.4 CANADA: WORKPLACE HAZARDOUS MATERIALS INFORMATION SYSTEM (WHMIS)

D2B: Irritating to skin / eyes.

E: Corrosive Material.

This product was classified using the hazard criteria of the Controlled Products Regulations (CPR). This Document contains all information required by the CPR.

SECTION 16. OTHER INFORMATION

16.1 HAZARD RATINGS:

HEALTH (NFPA): 3, HEALTH (HMIS): 3, FLAMMABILITY: 0, PHYSICAL HAZARD: 2

(Personal Protection Rating to be supplied by user based on use conditions.)

This information is intended solely for the use of individuals trained in the NFPA & HMIS hazard rating systems.

16.2 EMPLOYEE TRAINING

See Section 2 for Risk & Safety Statements. Employees should be made aware of all hazards of this material (as stated in this SDS) before handling it.

16.3 SDS DATE: 01/15/2015

Univar USA Inc Material Safety Data Sheet

For Additional Information contact MSDS Coordinator during business hours, Pacific time: (425) 889-3400

Notice

Univar USA Inc. ("Univar") expressly disclaims all express or implied warranties of merchantability and fitness for a particular purpose, with respect to the product or information provided herein, and shall under no circumstances be liable for incidental or consequential damages.

Do not use ingredient information and/or ingredient percentages in this MSDS as a product specification. For product specification information refer to a product specification sheet and/or a certificate of analysis. These can be obtained from your local Univar sales office.

All information appearing herein is based upon data obtained from the manufacturer and/or recognized technical sources. While the information is believed to be accurate, Univar makes no representations as to its accuracy or sufficiency. Conditions of use are beyond Univar's control and therefore users are responsible to verify this data under their own operating conditions to determine whether the product is suitable for their particular purposes and they assume all risks of their use, handling, and disposal of the product, or from the publication or use of, or reliance upon, information contained herein.

This information relates only to the product designated herein, and does not relate to its use in combination with any other material or in any other process

Safety Data Sheet

According to OSHA HCS 2012 (29 CFR 1910.1200), Health Canada HPR (SOR/2015-17), and Mexico NOM-018-STPS-2015



SECTION 1: Identification

Product Identifier **Transformer Oil**
Other means of identification Phillips 66 Transformer Oil
Code **LBPH817806**
Issue date 20-Feb-2019
Relevant identified uses Insulating Oil
Uses advised against All others
24 Hour Emergency Phone Number CHEMTREC: 1-800-424-9300
CHEMTREC Mexico 01-800-681-9531
CHEMTREC Global +1 703 527 3887

Manufacturer/Supplier Phillips 66 Lubricants A Division of Phillips 66 Company P.O. Box 421959 Houston, Texas 77242-1959	SDS Information URL: www.phillips66.com/SDS Phone: 800-762-0942 Email: SDS@P66.com	Customer Service U.S.: 800-368-7128 or International: 1-832-765-2500 Technical Information 1-877-445-9198
---	---	--

Initial supplier identifier (Canada)

Phillips 66 Canada Ltd.
PO Box 258, Station M
Calgary, AB T2P 2H9
Telephone: 587-233-6600
Customer Service: 800-633-0383

SECTION 2: Hazard identification

Classified Hazards H304 -- Aspiration Hazard -- Category 1 H412 -- Hazardous to the aquatic environment, chronic toxicity -- Category 3	Hazards Not Otherwise Classified (HNOC) PHNOC: None known HHNOC: None known
--	--

Label elements

DANGER



May be fatal if swallowed and enters airways
Harmful to aquatic life with long lasting effects

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician; Do NOT induce vomiting; Avoid release to the environment; Store locked up; Dispose of contents/container to an approved waste disposal plant

SECTION 3: Composition/information on ingredients

Chemical Name	CASRN	Concentration
Distillates, petroleum, hydrotreated light naphthenic	64742-53-6	45-99.9
Distillates, petroleum, hydrotreated light paraffinic	64742-55-8	0-55
Distillates, petroleum, solvent-dewaxed light paraffinic	64742-56-9	0-20
2,6-Di-tert-butyl-p-cresol	128-37-0	<0.3

¹ All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

SECTION 4: First aid measures

Eye Contact: If irritation or redness develops from exposure, flush eyes with clean water. If symptoms persist, seek medical attention.

Skin Contact: Remove contaminated shoes and clothing and cleanse affected area(s) thoroughly by washing with mild soap and water or a waterless hand cleaner. If irritation or redness develops and persists, seek medical attention.

Inhalation: First aid is not normally required. If breathing difficulties develop, move victim away from source of exposure and into fresh air in a position comfortable for breathing. Seek immediate medical attention.

Ingestion: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. If victim is drowsy or unconscious and vomiting, place on the left side with the head down. If possible, do not leave victim unattended and observe closely for adequacy of breathing. Seek medical attention.

Most important symptoms and effects, both acute and delayed: Inhalation of oil mists or vapors generated at elevated temperatures may cause respiratory irritation. Accidental ingestion can result in minor irritation of the digestive tract, nausea and diarrhea. Prolonged or repeated contact may dry skin and cause irritation.

Notes to Physician: Acute aspirations of large amounts of oil-laden material may produce a serious aspiration pneumonia. Patients who aspirate these oils should be followed for the development of long-term sequelae. Inhalation exposure to oil mists below current workplace exposure limits is unlikely to cause pulmonary abnormalities.

SECTION 5: Firefighting measures

NFPA 704: National Fire Protection Association

Health: 0 Flammability: 1 Instability: 0



0 = minimal hazard
1 = slight hazard
2 = moderate hazard
3 = severe hazard
4 = extreme hazard

Extinguishing Media: Dry chemical, carbon dioxide, foam, or water spray is recommended. Water or foam may cause frothing of materials heated above 212°F / 100°C. Carbon dioxide can displace oxygen. Use caution when applying carbon dioxide in confined spaces. Simultaneous use of foam and water on the same surface is to be avoided as water destroys the foam.

Specific hazards arising from the chemical

Unusual Fire & Explosion Hazards: This material may burn, but will not ignite readily. If container is not properly cooled, it can rupture in the heat of a fire.

Hazardous Combustion Products: Combustion may yield smoke, carbon monoxide, and other products of incomplete combustion. Oxides of sulfur, nitrogen or phosphorus may also be formed.

Special protective actions for fire-fighters: For fires beyond the initial stage, emergency responders in the immediate hazard area should wear protective clothing. When the potential chemical hazard is unknown, in enclosed or confined spaces, a self contained breathing apparatus should be worn. In addition, wear other appropriate protective equipment as conditions warrant (see Section 8). Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Stop spill/release if it can be

done safely. Move undamaged containers from immediate hazard area if it can be done safely. Water spray may be useful in minimizing or dispersing vapors and to protect personnel. Cool equipment exposed to fire with water, if it can be done safely. Avoid spreading burning liquid with water used for cooling purposes.

See Section 9 for Flammable Properties including Flash Point and Flammable (Explosive) Limits

SECTION 6: Accidental release measures

Personal precautions, protective equipment and emergency procedures: This material may burn, but will not ignite readily. Keep all sources of ignition away from spill/release. Stay upwind and away from spill/release. Avoid direct contact with material. For large spillages, notify persons down wind of the spill/release, isolate immediate hazard area and keep unauthorized personnel out. Wear appropriate protective equipment, including respiratory protection, as conditions warrant (see Section 8). See Sections 2 and 7 for additional information on hazards and precautionary measures.

Environmental Precautions: Stop and contain spill/release if it can be done safely. Prevent spilled material from entering sewers, storm drains, other unauthorized drainage systems, and natural waterways. Use water sparingly to minimize environmental contamination and reduce disposal requirements. If spill occurs on water notify appropriate authorities and advise shipping of any hazard. Spills into or upon navigable waters, the contiguous zone, or adjoining shorelines that cause a sheen or discoloration on the surface of the water, may require notification of the National Response Center (phone number 800-424-8802).

Methods and material for containment and cleaning up: Notify relevant authorities in accordance with all applicable regulations. Immediate cleanup of any spill is recommended. Dike far ahead of spill for later recovery or disposal. Absorb spill with inert material such as sand or vermiculite, and place in suitable container for disposal. If spilled on water remove with appropriate methods (e.g. skimming, booms or absorbents). In case of soil contamination, remove contaminated soil for remediation or disposal, in accordance with local regulations.

Recommended measures are based on the most likely spillage scenarios for this material; however local conditions and regulations may influence or limit the choice of appropriate actions to be taken. See Section 13 for information on appropriate disposal.

SECTION 7: Handling and storage

Precautions for safe handling: Keep away from flames and hot surfaces. Wash thoroughly after handling. Use good personal hygiene practices and wear appropriate personal protective equipment (see section 8). Spills will produce very slippery surfaces. Do not enter confined spaces such as tanks or pits without following proper entry procedures such as ASTM D-4276 and 29CFR 1910.146. Do not wear contaminated clothing or shoes.

Conditions for safe storage: Keep container(s) tightly closed and properly labeled. Use and store this material in cool, dry, well-ventilated area away from heat and all sources of ignition. Store only in approved containers. Keep away from any incompatible material (see Section 10). Protect container(s) against physical damage.

"Empty" containers retain residue and may be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, or other sources of ignition. They may explode and cause injury or death. "Empty" drums should be completely drained, properly bunged, and promptly shipped to the supplier or a drum reconditioner. All containers should be disposed of in an environmentally safe manner and in accordance with governmental regulations. Before working on or in tanks which contain or have contained this material, refer to OSHA regulations, ANSI Z49.1, and other references pertaining to cleaning, repairing, welding, or other contemplated operations.

SECTION 8: Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

Chemical Name	ACGIH	OSHA	Mexico	Phillips 66
Distillates, petroleum, hydrotreated light naphthenic	TWA: 5mg/m ³ STEL: 10 mg/m ³ as Oil Mist, if Generated	---	---	---
Distillates, petroleum, hydrotreated light paraffinic	TWA: 5mg/m ³ STEL: 10 mg/m ³ as Oil Mist, if Generated	---	---	---
Distillates, petroleum, solvent-dewaxed light paraffinic	TWA: 5mg/m ³ STEL: 10 mg/m ³ as Oil Mist, if Generated	---	---	---

2,6-Di-tert-butyl-p-cresol	TWA: 2 mg/m ³ inhalable fraction and vapor	---	TWA-8hr: 2 mg/m ³ inhalable fraction and vapor (VLE-PPT)	---
----------------------------	--	-----	---	-----

Note: State, local or other agencies or advisory groups may have established more stringent limits. Consult an industrial hygienist or similar professional, or your local agencies, for further information.

Biological occupational exposure limits

Note: None

Engineering controls: If current ventilation practices are not adequate to maintain airborne concentrations below the established exposure limits, additional engineering controls may be required.

Eye/Face Protection: The use of eye/face protection is not normally required; however, good industrial hygiene practice suggests the use of eye protection that meets or exceeds ANSI Z.87.1 whenever working with chemicals.

Skin/Hand Protection: The use of skin protection is not normally required; however, good industrial hygiene practice suggests the use of gloves or other appropriate skin protection whenever working with chemicals. Suggested protective materials: Nitrile rubber

Respiratory Protection: Where there is potential for airborne exposure above the exposure limit a NIOSH certified air purifying respirator equipped with R or P95 filters may be used.

A respiratory protection program that meets or is equivalent to OSHA 29 CFR 1910.134 and ANSI Z88.2 should be followed whenever workplace conditions warrant a respirator's use. Air purifying respirators provide limited protection and cannot be used in atmospheres that exceed the maximum use concentration (as directed by regulation or the manufacturer's instructions), in oxygen deficient (less than 19.5 percent oxygen) situations, or under conditions that are immediately dangerous to life and health (IDLH).

Suggestions provided in this section for exposure control and specific types of protective equipment are based on readily available information. Users should consult with the specific manufacturer to confirm the performance of their protective equipment. Specific situations may require consultation with industrial hygiene, safety, or engineering professionals.

SECTION 9: Physical and chemical properties

Note: Unless otherwise stated, values are determined at 20°C (68°F) and 760 mm Hg (1 atm). Data represent typical values and are not intended to be specifications.

Appearance: Clear and bright

Physical Form: Liquid

Odor: Petroleum

Odor Threshold: No data

pH: Not applicable

Vapor Density (air=1): >1

Upper Explosive Limits (vol % in air): No data

Lower Explosive Limits (vol % in air): No data

Evaporation Rate (nBuAc=1): No data

Particle Size: Not applicable

Percent Volatile: No data

Flammability (solid, gas): Not applicable

Solubility in Water: Insoluble

Flash Point: > 221 °F / > 105 °C

Test Method: Pensky-Martens Closed Cup (PMCC), ASTM D93, EPA 1010

Initial Boiling Point/Range: No data

Vapor Pressure: <1 mm Hg

Partition Coefficient (n-octanol/water) (Kow): No data

Melting/Freezing Point: No data

Auto-ignition Temperature: No data

Decomposition Temperature: No data

Specific Gravity (water=1): 0.888 @ 60°F (15.6°C)

Bulk Density: 7.4 lbs/gal

Viscosity: 2.3 cSt @ 100°C; 9.6 cSt @ 40°C

Pour Point: No data

SECTION 10: Stability and reactivity

Reactivity: Not chemically reactive.

Chemical stability: Stable under normal ambient and anticipated conditions of use.

Possibility of hazardous reactions: Hazardous reactions not anticipated.

Conditions to avoid: Extended exposure to high temperatures can cause decomposition. Avoid all possible sources of ignition.

Incompatible materials: Avoid contact with strong oxidizing agents and strong reducing agents.

Hazardous decomposition products: Not anticipated under normal conditions of use.

SECTION 11: Toxicological information

Information on Toxicological Effects

Substance / Mixture

Acute Toxicity	Hazard	Additional Information	LC50/LD50 Data
Inhalation	Unlikely to be harmful		>5 mg/L (mist, estimated)
Dermal	Unlikely to be harmful		> 2 g/kg (estimated)
Oral	Unlikely to be harmful		> 5 g/kg (estimated)

Likely Routes of Exposure: Inhalation, eye contact, skin contact

Aspiration Hazard: May be fatal if swallowed and enters airways

Skin Corrosion/Irritation: Not expected to be irritating. Repeated exposure may cause skin dryness or cracking.

Serious Eye Damage/Irritation: Not expected to be irritating.

Skin Sensitization: Not expected to be a skin sensitizer.

Respiratory Sensitization: No information available.

Specific Target Organ Toxicity (Single Exposure): Not expected to cause organ effects from single exposure.

Specific Target Organ Toxicity (Repeated Exposure): Not expected to cause organ effects from repeated exposure.

Carcinogenicity: Not expected to cause cancer.

Germ Cell Mutagenicity: Not expected to cause heritable genetic effects.

Reproductive Toxicity: Not expected to cause reproductive toxicity.

Information on Toxicological Effects of Components

Lubricant Base Oil (Petroleum)

Carcinogenicity: The petroleum base oils contained in this product have been highly refined by a variety of processes including severe hydrocracking/hydroprocessing to reduce aromatics and improve performance characteristics. All of the oils meet the IP-346 criteria of less than 3 percent PAH's and are not considered carcinogens by NTP, IARC, or OSHA.

SECTION 12: Ecological information

GHS Classification:

H412 -- Hazardous to the aquatic environment, chronic toxicity -- Category 3

Harmful to aquatic life with long lasting effects.

Toxicity: Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment

Persistence and Degradability: The hydrocarbons in this material are not readily biodegradable, but since they can be degraded by microorganisms, they are regarded as inherently biodegradable.

Bioaccumulative Potential: Log Kow values measured for the hydrocarbon components of this material are greater than 5.3, and therefore regarded as having the potential to bioaccumulate. In practice, metabolic processes may reduce bioconcentration.

Mobility in Soil: Volatilization to air is not expected to be a significant fate process due to the low vapor pressure of this material. In water, base oils will float and spread over the surface at a rate dependent upon viscosity. There will be significant removal of hydrocarbons from the water by sediment adsorption. In soil and sediment, hydrocarbon components will show low mobility with adsorption to sediments being the predominant physical process. The main fate process is expected to be slow biodegradation of the hydrocarbon constituents in soil and sediment.

Other adverse effects: None anticipated.

SECTION 13: Disposal considerations

The generator of a waste is always responsible for making proper hazardous waste determinations and needs to consider state and local requirements in addition to federal regulations. This material, if discarded as produced, would not be a federally regulated RCRA "listed" hazardous waste and is not believed to exhibit characteristics of hazardous waste. See Sections 7 and 8 for information on handling, storage and personal protection and Section 9 for physical/chemical properties. It is possible that the material as produced contains constituents which are not required to be listed in the SDS but could affect the hazardous waste determination. Additionally, use which results in chemical or physical change of this material could subject it to regulation as a hazardous waste. This material under most intended uses would become "Used Oil" due to contamination by physical or chemical impurities. Whenever possible, Recycle used oil in accordance with applicable federal and state or local regulations. Container contents should be completely used and containers should be emptied prior to discard.

SECTION 14: Transport information

UN Number: Not regulated

UN proper shipping name: None

Transport hazard class(es): None

Packing Group: None

Environmental Hazards: This product does not meet the DOT/UN/IMDG/IMO criteria of a marine pollutant

Special precautions for user: If shipped by land in a packaging having a capacity of 3,500 gallons or more, the provisions of 49 CFR, Part 130 apply. (Contains oil)

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code: Not applicable

SECTION 15: Regulatory information

CERCLA/SARA - Section 302 Extremely Hazardous Substances and TPQs (in pounds)

This material does not contain any chemicals subject to the reporting requirements of SARA 302 and 40 CFR 372.

CERCLA/SARA - Section 311/312 (Title III Hazard Categories)

Should this product meet EPCRA 311/312 Tier reporting criteria at 40 CFR 370, refer to Section 2 of this SDS for appropriate classifications.

CERCLA/SARA - Section 313 and 40 CFR 372

This material does not contain any chemicals subject to the reporting requirements of SARA 313 and 40 CFR 372.

EPA (CERCLA) Reportable Quantity (in pounds)

This material does not contain any chemicals with CERCLA Reportable Quantities.

California Proposition 65

This material does not contain any chemicals which are known to the State of California to cause cancer, birth defects or other reproductive harm at concentrations that trigger the warning requirements of California Proposition 65.

International Inventories

All components are either listed on the US TSCA Inventory, or are not regulated under TSCA.

All components are either on the DSL, or are exempt from DSL listing requirements.

SECTION 16: Other information

Issue date	Previous Issue Date:	SDS Number	Status:
20-Feb-2019	02-Mar-2018	LBPH817806	FINAL

Revised Sections or Basis for Revision:

Periodic review and update

Mexican NOM-018-STPS-2015:

The information within is considered correct but is not exhaustive and will be used for guidance only, which is based on the current knowledge of the substance or mixture and is applicable to the appropriate safety precautions for the product.

Precautionary Statements:

P301 + P310 - IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

P331 - Do NOT induce vomiting

P273 - Avoid release to the environment

P405 - Store locked up

P501 - Dispose of contents/ container to an approved waste disposal plant

Guide to Abbreviations:

ACGIH = American Conference of Governmental Industrial Hygienists; CASRN = Chemical Abstracts Service Registry Number; CEILING = Ceiling Limit (15 minutes); CERCLA = The Comprehensive Environmental Response, Compensation, and Liability Act; EPA = Environmental Protection Agency; GHS = Globally Harmonized System; HPR = Hazardous Products Regulations; IARC = International Agency for Research on Cancer; INSHT = National Institute for Health and Safety at Work; IOPC = International Oil Pollution Compensation; LEL = Lower Explosive Limit; NE = Not Established; NFPA = National Fire Protection Association; NTP = National Toxicology Program; OSHA = Occupational Safety and Health Administration; PEL = Permissible Exposure Limit (OSHA); SARA = Superfund Amendments and Reauthorization Act; STEL = Short Term Exposure Limit (15 minutes); TLV = Threshold Limit Value (ACGIH); TWA = Time Weighted Average (8 hours); UEL = Upper Explosive Limit; WHMIS = Worker Hazardous Materials Information System (Canada)

Disclaimer of Expressed and implied Warranties:

The information presented in this Safety Data Sheet is based on data believed to be accurate as of the date this Safety Data Sheet was prepared. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY OTHER WARRANTY IS EXPRESSED OR IS TO BE IMPLIED REGARDING THE ACCURACY OR COMPLETENESS OF THE INFORMATION PROVIDED ABOVE, THE RESULTS TO BE OBTAINED FROM THE USE OF THIS INFORMATION OR THE PRODUCT, THE SAFETY OF THIS PRODUCT, OR THE HAZARDS RELATED TO ITS USE. No responsibility is assumed for any damage or injury resulting from abnormal use or from any failure to adhere to recommended practices. The information provided above, and the product, are furnished on the condition that the person receiving them shall make their own determination as to the suitability of the product for their particular purpose and on the condition that they assume the risk of their use. In addition, no authorization is given nor implied to practice any patented invention without a license.



Univar USA Inc Material Safety Data Sheet

TOPAZ POWER GROUP, LC
LAREDO WLE, LP
7300 CPL ROAD
LAREDO
TX 78041

MSDS No:
Version No:
Order No:

Univar USA Inc., 17425 NE Union Hill Rd., Redmond WA 98052
(425) 889 3400

Emergency Assistance

For emergency assistance involving chemicals call
Chemtrec - (800) 424-9300

Safety Data Sheet

CAUSTIC SODA 50%

Version 1.10

Revision Date: 11/11/2023

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Product name : CAUSTIC SODA 50%

Recommended use of the chemical and restrictions on use

Recommended use : Reserved for industrial and professional use.

Manufacturer or supplier's details

Company : Univar Solutions USA
Address : 3075 Highland Pkwy Suite 200
 Downers Grove, IL 60515
 United States of America (USA)

Emergency telephone number:

Transport North America: CHEMTREC (1-800-424-9300)

CHEMTREC INTERNATIONAL Tel # 703-527-3887

Additional Information: : Responsible Party: Product Compliance Department
 E-mail: SDSNA@univarsolutions.com
 SDS Requests: 1-855-429-2661
 Website: www.univarsolutions.com

SECTION 2. HAZARDS IDENTIFICATION

GHS Classification

Corrosive to metals : Category 1

Acute toxicity (Oral) : Category 4

Skin corrosion : Category 1A

Serious eye damage : Category 1

Specific target organ toxicity
 - single exposure : Category 3 (Respiratory system)

GHS label elements

Hazard pictograms :



Signal word : Danger

Hazard statements : H290 May be corrosive to metals.
 H302 Harmful if swallowed.
 H314 Causes severe skin burns and eye damage.
 H335 May cause respiratory irritation.

Precautionary statements : **Prevention:**
 P234 Keep only in original container.
 P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
 P264 Wash skin thoroughly after handling.
 P270 Do not eat, drink or smoke when using this product.
 P271 Use only outdoors or in a well-ventilated area.

Safety Data Sheet

CAUSTIC SODA 50%

Version 1.10

Revision Date: 11/11/2023

P280 Wear protective gloves/ protective clothing/ eye protection/ face protection.

Response:

P301 + P312 + P330 IF SWALLOWED: Call a POISON CENTER/ doctor if you feel unwell. Rinse mouth.

P301 + P330 + P331 IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.

P303 + P361 + P353 IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/ shower.

P304 + P340 + P310 IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER/ doctor.

P305 + P351 + P338 + P310 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/ doctor.

P363 Wash contaminated clothing before reuse.

P390 Absorb spillage to prevent material damage.

Storage:

P403 + P233 Store in a well-ventilated place. Keep container tightly closed.

P405 Store locked up.

P406 Store in corrosive resistant container with a resistant inner liner.

Disposal:

P501 Dispose of contents/ container to an approved waste disposal plant.

Other hazards

None known.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

CAS-No.	Chemical name	Weight percent
1310-73-2	Sodium hydroxide	50 - 70

Actual concentration is withheld as a trade secret

Any Concentration shown as a range is due to batch variation.

SECTION 4. FIRST AID MEASURES

- General advice : Move out of dangerous area.
Consult a physician.
Show this safety data sheet to the doctor in attendance.
Do not leave the victim unattended.
- If inhaled : If unconscious, place in recovery position and seek medical advice.
If symptoms persist, call a physician.
- In case of skin contact : Immediate medical treatment is necessary as untreated wounds from corrosion of the skin heal slowly and with difficul-

Safety Data Sheet

CAUSTIC SODA 50%

Version 1.10

Revision Date: 11/11/2023

In case of eye contact	ty. If on skin, rinse well with water. If on clothes, remove clothes. : Small amounts splashed into eyes can cause irreversible tissue damage and blindness. In the case of contact with eyes, rinse immediately with plenty of water and seek medical advice. Continue rinsing eyes during transport to hospital. Remove contact lenses. Protect unharmed eye. Keep eye wide open while rinsing. If eye irritation persists, consult a specialist. Take victim immediately to hospital.
If swallowed	: Keep respiratory tract clear. Do NOT induce vomiting. Do not give milk or alcoholic beverages. Never give anything by mouth to an unconscious person. If symptoms persist, call a physician. Take victim immediately to hospital.

SECTION 5. FIREFIGHTING MEASURES

Suitable extinguishing media	: Carbon dioxide (CO₂) Foam Dry powder Water mist
Unsuitable extinguishing media	: High volume water jet
Specific hazards during fire-fighting	: Do not allow run-off from fire fighting to enter drains or water courses.
Hazardous combustion products	: No hazardous combustion products are known
Further information	: Collect contaminated fire extinguishing water separately. This must not be discharged into drains. Fire residues and contaminated fire extinguishing water must be disposed of in accordance with local regulations.
Special protective equipment for firefighters	: Wear self-contained breathing apparatus for firefighting if necessary.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures	: Use personal protective equipment.
Environmental precautions	: Prevent product from entering drains. Prevent further leakage or spillage if safe to do so. If the product contaminates rivers and lakes or drains inform respective authorities.
Methods and materials for	: Soak up with inert absorbent material (e.g. sand, silica gel,

Safety Data Sheet

CAUSTIC SODA 50%

Version 1.10

Revision Date: 11/11/2023

containment and cleaning up : acid binder, universal binder, sawdust).
Keep in suitable, closed containers for disposal.

SECTION 7. HANDLING AND STORAGE

Advice on protection against fire and explosion : Normal measures for preventive fire protection.

Advice on safe handling : Do not breathe vapours/dust.
Avoid contact with skin and eyes.
For personal protection see section 8.
Smoking, eating and drinking should be prohibited in the application area.
To avoid spills during handling keep bottle on a metal tray.
Dispose of rinse water in accordance with local and national regulations.

Conditions for safe storage : Keep container tightly closed in a dry and well-ventilated place.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.
Observe label precautions.
Electrical installations / working materials must comply with the technological safety standards.

Recommended storage temperature : 16 - 65 °C

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

CAS-No.	Components	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
1310-73-2	Sodium hydroxide	C	2 mg/m ³	ACGIH
		C	2 mg/m ³	NIOSH REL
		TWA	2 mg/m ³	OSHA Z-1
		C	2 mg/m ³	OSHA P0
		C	2 mg/m ³	CAL PEL

Personal protective equipment

Respiratory protection : General and local exhaust ventilation is recommended to maintain vapor exposures below recommended limits. Where concentrations are above recommended limits or are unknown, appropriate respiratory protection should be worn. Follow OSHA respirator regulations (29 CFR 1910.134) and use NIOSH/MSHA approved respirators. Protection provided by air purifying respirators against exposure to any hazardous chemical is limited. Use a positive pressure air supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstance where air purifying respirators may not provide adequate protection.

Hand protection

Safety Data Sheet

CAUSTIC SODA 50%

Version 1.10

Revision Date: 11/11/2023

Remarks	: The suitability for a specific workplace should be discussed with the producers of the protective gloves.
Eye protection	: Eye wash bottle with pure water Tightly fitting safety goggles Wear face-shield and protective suit for abnormal processing problems.
Skin and body protection	: Impervious clothing Choose body protection according to the amount and concentration of the dangerous substance at the work place.
Hygiene measures	: When using do not eat or drink. When using do not smoke. Wash hands before breaks and at the end of workday.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	: liquid
Colour	: No data available
Odour	: No data available
Odour Threshold	: No data available
pH	: 14
Freezing Point (Melting point/freezing point)	: 12 - 15 °C (54 - 59 °F)
Boiling Point (Boiling point/boiling range)	: 140 - 145 °C (284 - 293 °F)
Flash point	: does not flash
Evaporation rate	: No data available
Flammability (solid, gas)	: No data available
Upper explosion limit	: No data available
Lower explosion limit	: No data available
Vapour pressure	: No data available
Relative vapour density	: No data available
Relative density	: 1.5298
Density	: 12.76 lb/gal
Water solubility	: No data available
Solubility in other solvents	: No data available
Partition coefficient: n-octanol/water	: No data available
Auto-ignition temperature	: No data available
Thermal decomposition	: No data available

SECTION 10. STABILITY AND REACTIVITY

Reactivity	: Corrosive to metals Exothermic reaction with acids.
Chemical stability	: Stable under normal conditions.
Possibility of hazardous reactions	: No decomposition if stored and applied as directed.
Conditions to avoid	: Freezing temperatures.

Safety Data Sheet
CAUSTIC SODA 50%

Version 1.10

Revision Date: 11/11/2023

Incompatible materials	: Heat Acids Metals Oxidizing agents Halogenated compounds organic nitro compounds Zinc
Hazardous decomposition products	: Hydrogen

SECTION 11. TOXICOLOGICAL INFORMATION**Skin corrosion/irritation****Components:****1310-73-2:**

Species: Rabbit

Result: Causes severe burns.

Serious eye damage/eye irritation**Components:****1310-73-2:**

Species: Rabbit

Result: Risk of serious damage to eyes.

Carcinogenicity**IARC**

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

OSHA

No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

NTP

No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

STOT - single exposure**Product:**

Assessment: The substance or mixture is classified as specific target organ toxicant, single exposure, category 3 with respiratory tract irritation.

Further information**Product:**

Remarks: No data available

Safety Data Sheet
CAUSTIC SODA 50%

Version 1.10

Revision Date: 11/11/2023

SECTION 12. ECOLOGICAL INFORMATION**Ecotoxicity**

No data available

Persistence and degradability

No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

Other adverse effects**Product:**

Ozone-Depletion Potential : Regulation: 40 CFR Protection of Environment; Part 82 Protection of Stratospheric Ozone - CAA Section 602 Class I Substances
Remarks: This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B).

Additional ecological information : No data available

SECTION 13. DISPOSAL CONSIDERATIONS**Disposal methods**

Waste from residues : Dispose of in accordance with all applicable local, state and federal regulations.
For assistance with your waste management needs - including disposal, recycling and waste stream reduction, contact Univar Solutions ChemCare: 1-800-637-7922

Contaminated packaging : Empty remaining contents.
Dispose of as unused product.
Do not re-use empty containers.

SECTION 14. TRANSPORT INFORMATION**DOT (Department of Transportation):**

UN1824, Sodium hydroxide solution, 8, II

IATA (International Air Transport Association):

UN1824, Sodium hydroxide solution, 8, II

Safety Data Sheet

CAUSTIC SODA 50%

Version 1.10

Revision Date: 11/11/2023

IMDG (International Maritime Dangerous Goods):
UN1824, SODIUM HYDROXIDE SOLUTION, 8, II

SECTION 15. REGULATORY INFORMATION

EPCRA - Emergency Planning and Community Right-to-Know Act

CERCLA Reportable Quantity

Components	CAS-No.	Component RQ (lbs)	Calculated product RQ (lbs)
Sodium hydroxide	1310-73-2	1000	2000

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 311/312 Hazards : Corrosive to metals
Skin corrosion or irritation
Serious eye damage or eye irritation
Acute toxicity (any route of exposure)
Specific target organ toxicity (single or repeated exposure)

SARA 302 : This material does not contain any components with a section 302 EHS TPQ.

SARA 313 : This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Clean Air Act

This product does not contain any hazardous air pollutants (HAP), as defined by the U.S. Clean Air Act Section 112 (40 CFR 61).

This product does not contain any chemicals listed under the U.S. Clean Air Act Section 112(r) for Accidental Release Prevention (40 CFR 68.130, Subpart F).

This product does not contain any chemicals listed under the U.S. Clean Air Act Section 111 SOCM I Intermediate or Final VOC's (40 CFR 60.489).

Clean Water Act

The following Hazardous Substances are listed under the U.S. CleanWater Act, Section 311, Table 116.4A:

1310-73-2 Sodium hydroxide

The following Hazardous Chemicals are listed under the U.S. CleanWater Act, Section 311, Table 117.3:

1310-73-2 Sodium hydroxide

This product does not contain any toxic pollutants listed under the U.S. Clean Water Act Section 307

Massachusetts Right To Know

1310-73-2 Sodium hydroxide

Pennsylvania Right To Know

1310-73-2 Sodium hydroxide

7732-18-5 Water

California Prop 65 : This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

Safety Data Sheet

CAUSTIC SODA 50%

Version 1.10


Revision Date: 11/11/2023

The components of this product are reported in the following inventories:

TSCA	: On TSCA Inventory
DSL	: All components of this product are on the Canadian DSL
AICS	: On the inventory, or in compliance with the inventory
NZIoC	: Not in compliance with the inventory
ENCS	: On the inventory, or in compliance with the inventory
KECI	: On the inventory, or in compliance with the inventory
PICCS	: On the inventory, or in compliance with the inventory
IECSC	: On the inventory, or in compliance with the inventory

SECTION 16. OTHER INFORMATION

NFPA:



HMIS III:

HEALTH	3/
FLAMMABILITY	0
PHYSICAL HAZARD	4

0 = not significant, 1 = Slight,
2 = Moderate, 3 = High
4 = Extreme, * = Chronic

The information accumulated is based on the data of which we are aware and is believed to be correct as of the date hereof. Since this information may be applied under conditions beyond our control and with which we may be unfamiliar and since data made become available subsequently to the date hereof, we do not assume any responsibility for the results of its use. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances. This SDS has been prepared by Univar Solutions Product Compliance Department (1-855-429-2661) SDSNA@univarsolutions.com.

Revision Date : 11/11/2023

Material number:

16212043, 16212042, 16212041, 16212039, 16212038, 16210888, 16149051, 16210426, 16208930, 16208441, 16207958, 16207089, 16206212, 16206172, 16195419, 16196593, 16203117, 16193663, 16191539, 16188943, 16188859, 16188905, 40509, 16144372, 85833, 16187875, 16187706, 16187503, 16187172, 16184289, 16184571, 16183215, 16183115,

Safety Data Sheet

CAUSTIC SODA 50%

Version 1.10

Revision Date: 11/11/2023

16181535, 16174812, 16176162, 16176725, 16175550, 16177057, 16176719, 16176286, 16175611, 16175549, 16177342, 16174633, 16176146, 16175652, 16175317, 16174795, 16174563, 16176924, 16180636, 16169042, 16168322, 16168270, 16168140, 16168139, 16179411, 16169006, 16168617, 16150547, 16162842, 16162538, 16144429, 16173515, 16168911, 16162950, 16162022, 16144216, 16143594, 16162020, 16168720, 16166706, 16152119, 16173289, 16179365, 16166192, 16137935, 16161861, 16143735, 16151817, 85472, 52714, 71460, 54298, 16168314, 16146819, 16163462, 16148908, 16144035, 16166958, 16166445, 16137825, 16151508, 16151289, 16160192, 16147037, 16156058, 16155066, 16135486

Key or legend to abbreviations and acronyms used in the safety data sheet			
ACGIH	American Conference of Government Industrial Hygienists	LD50	Lethal Dose 50%
AICS	Australia, Inventory of Chemical Substances	LOAEL	Lowest Observed Adverse Effect Level
DSL	Canada, Domestic Substances List	NFPA	National Fire Protection Agency
NDSL	Canada, Non-Domestic Substances List	NIOSH	National Institute for Occupational Safety & Health
CNS	Central Nervous System	NTP	National Toxicology Program
CAS	Chemical Abstract Service	NZIoC	New Zealand Inventory of Chemicals
EC50	Effective Concentration	NOAEL	No Observable Adverse Effect Level
EC50	Effective Concentration 50%	NOEC	No Observed Effect Concentration
EGEST	EOSCA Generic Exposure Scenario Tool	OSHA	Occupational Safety & Health Administration
EOSCA	European Oilfield Specialty Chemicals Association	PEL	Permissible Exposure Limit
EINECS	European Inventory of Existing Chemical Substances	PICCS	Philippines Inventory of Commercial Chemical Substances
MAK	Germany Maximum Concentration Values	PRNT	Presumed Not Toxic
GHS	Globally Harmonized System	RCRA	Resource Conservation Recovery Act
>=	Greater Than or Equal To	STEL	Short-term Exposure Limit
IC50	Inhibition Concentration 50%	SARA	Superfund Amendments and Reauthorization Act.
IARC	International Agency for Research on Cancer	TLV	Threshold Limit Value
IECSC	Inventory of Existing Chemical Substances in China	TWA	Time Weighted Average
ENCS	Japan, Inventory of Existing and New Chemical Substances	TSCA	Toxic Substance Control Act
KECI	Korea, Existing Chemical Inventory	UVCB	Unknown or Variable Composition, Complex Reaction Products, and Biological Materials
<=	Less Than or Equal To	WHMIS	Workplace Hazardous Materials Information System
LC50	Lethal Concentration 50%		

ATTACHMENT F
CONTRACT LABORATORY INFORMATION
(TECHNICAL REPORT WORKSHEET 2.0, p. 19, Item 1.c)

The following TPDES permit renewal analysis was conducted by:

A&B Labs

10100 East Freeway, Suite 100, Houston, TX 77029

tel: 713-453-6060, fax: 713-453-6091

Amanda Shute, Senior Project Manager / ashute@ablabs.com

Table 1

Pollutant
BOD (5-day)
CBOD (5-day)
Chemical oxygen demand
Total organic carbon
Dissolved Oxygen
Ammonia nitrogen
Total suspended solids
Nitrate nitrogen
Total organic nitrogen
Total phosphorus
Oil and grease
Total residual chlorine
Total dissolved solids
Sulfate
Chloride
Fluoride
Total alkalinity (mg/L as CaCO ₃)
Temperature
pH

Table 2

Pollutant
Aluminum, total
Antimony, total
Arsenic, total
Barium, total
Beryllium, total
Cadmium, total
Chromium, total
Chromium, hexavalent
Chromium, trivalent
Copper, total
Cyanide, available
Lead, total
Nickel, total
Selenium, total
Silver, total
Thallium, total
Zinc, total

Table 3

Pollutant			
Acrylonitrile	m-Cresol [3-Methylphenol]	1,3-Dichloropropene	Phenanthrene
Anthracene	o-Cresol [2-Methylphenol]	[1,3-Dichloropropylene]	Polychlorinated biphenyls (PCBs)
Benzene	p-Cresol [4-Methylphenol]	2,4-Dimethylphenol	Pyridine
Benzidine	1,2-Dibromoethane	Di-n-Butyl phthalate	1,2,4,5-Tetrachlorobenzene
Benzo(a)anthracene	m-Dichlorobenzene	Ethylbenzene	1,1,2,2-Tetrachloroethane
Benzo(a)pyrene	[1,3-Dichlorobenzene]	Fluoride	Tetrachloroethene
Bis(2-chloroethyl)ether	o-Dichlorobenzene	Hexachlorobenzene	[Tetrachloroethylene]
Bis(2-ethylhexyl)phthalate	[1,2-Dichlorobenzene]	Hexachlorobutadiene	Toluene
Bromodichloromethane	p-Dichlorobenzene	Hexachlorocyclopentadiene	1,1,1-Trichloroethane
[Dichlorobromomethane]	[1,4-Dichlorobenzene]	Hexachloroethane	1,1,2-Trichloroethane
Bromoform	3,3'-Dichlorobenzidine	Methyl ethyl ketone	Trichloroethene
Carbon tetrachloride	1,2-Dichloroethane	Nitrobenzene	[Trichloroethylene]
Chlorobenzene	1,1-Dichloroethene	N-Nitrosodiethylamine	2,4,5-Trichlorophenol
Chlorodibromomethane	[1,1-Dichloroethylene]	N-Nitroso-di-n-butylamine	TTHM (Total trihalomethanes)
[Dibromochloromethane]	Dichloromethane	Nonylphenol	Vinyl chloride
Chloroform	[Methylene chloride]	Pentachlorobenzene	
Chrysene	1,2-Dichloropropane	Pentachlorophenol	

The following TPDES permit renewal analysis was conducted by:

A&B Labs

10100 East Freeway, Suite 100, Houston, TX 77029

tel: 713-453-6060, fax: 713-453-6091

Amanda Shute, Senior Project Manager / ashute@ablabs.com

Table 6

Pollutants
Bromide
Color (PCU)
Nitrate-Nitrite (as N)
Sulfide (as S)
Sulfite (as SO ₃)
Boron, total
Cobalt, total
Iron, total
Magnesium, total
Manganese, total
Molybdenum, total
Tin, total
Titanium, total

Table 9

Pollutant
2-Chlorophenol
2,4-Dichlorophenol
2,4-Dimethylphenol
4,6-Dinitro-o-cresol
2,4-Dinitrophenol
2-Nitrophenol
4-Nitrophenol
p-Chloro-m-cresol
Pentachlorophenol
Phenol
2,4,6-Trichlorophenol

Table 8

Pollutant
Acrolein
Acrylonitrile
Benzene
Bromoform
Carbon tetrachloride
Chlorobenzene
Chlorodibromomethane
Chloroethane
2-Chloroethylvinyl ether
Chloroform
Dichlorobromomethane
[Bromodichloromethane]
1,1-Dichloroethane
1,2-Dichloroethane
1,1-Dichloroethylene
[1,1-Dichloroethene]
1,2-Dichloropropane
1,3-Dichloropropylene
[1,3-Dichloropropene]
Ethylbenzene
Methyl bromide [Bromomethane]
Methyl chloride [Chloromethane]
Methylene chloride
[Dichloromethane]
1,1,2,2-Tetrachloroethane
Tetrachloroethylene
[Tetrachloroethene]
Toluene
1,2-Trans-dichloroethylene
[1,2-Trans-dichloroethene]
1,1,1-Trichloroethane
1,1,2-Trichloroethane
Trichloroethylene
[Trichloroethene]
Vinyl chloride

The following TPDES permit renewal analysis was conducted by:

ALS Environmental (Subcontractor of A&B Labs)

10450 Stancliff Rd., Ste. 210, Houston, TX 77099


tel: 281-530-5656

Hussam Kelany, Client Services Representative


Table 6

Pollutant
Surfactants

FIGURE 1
SITE LOCATION USGS MAP
(ADMINISTRATIVE REPORT 1.0, p. 8, Item 11.b)

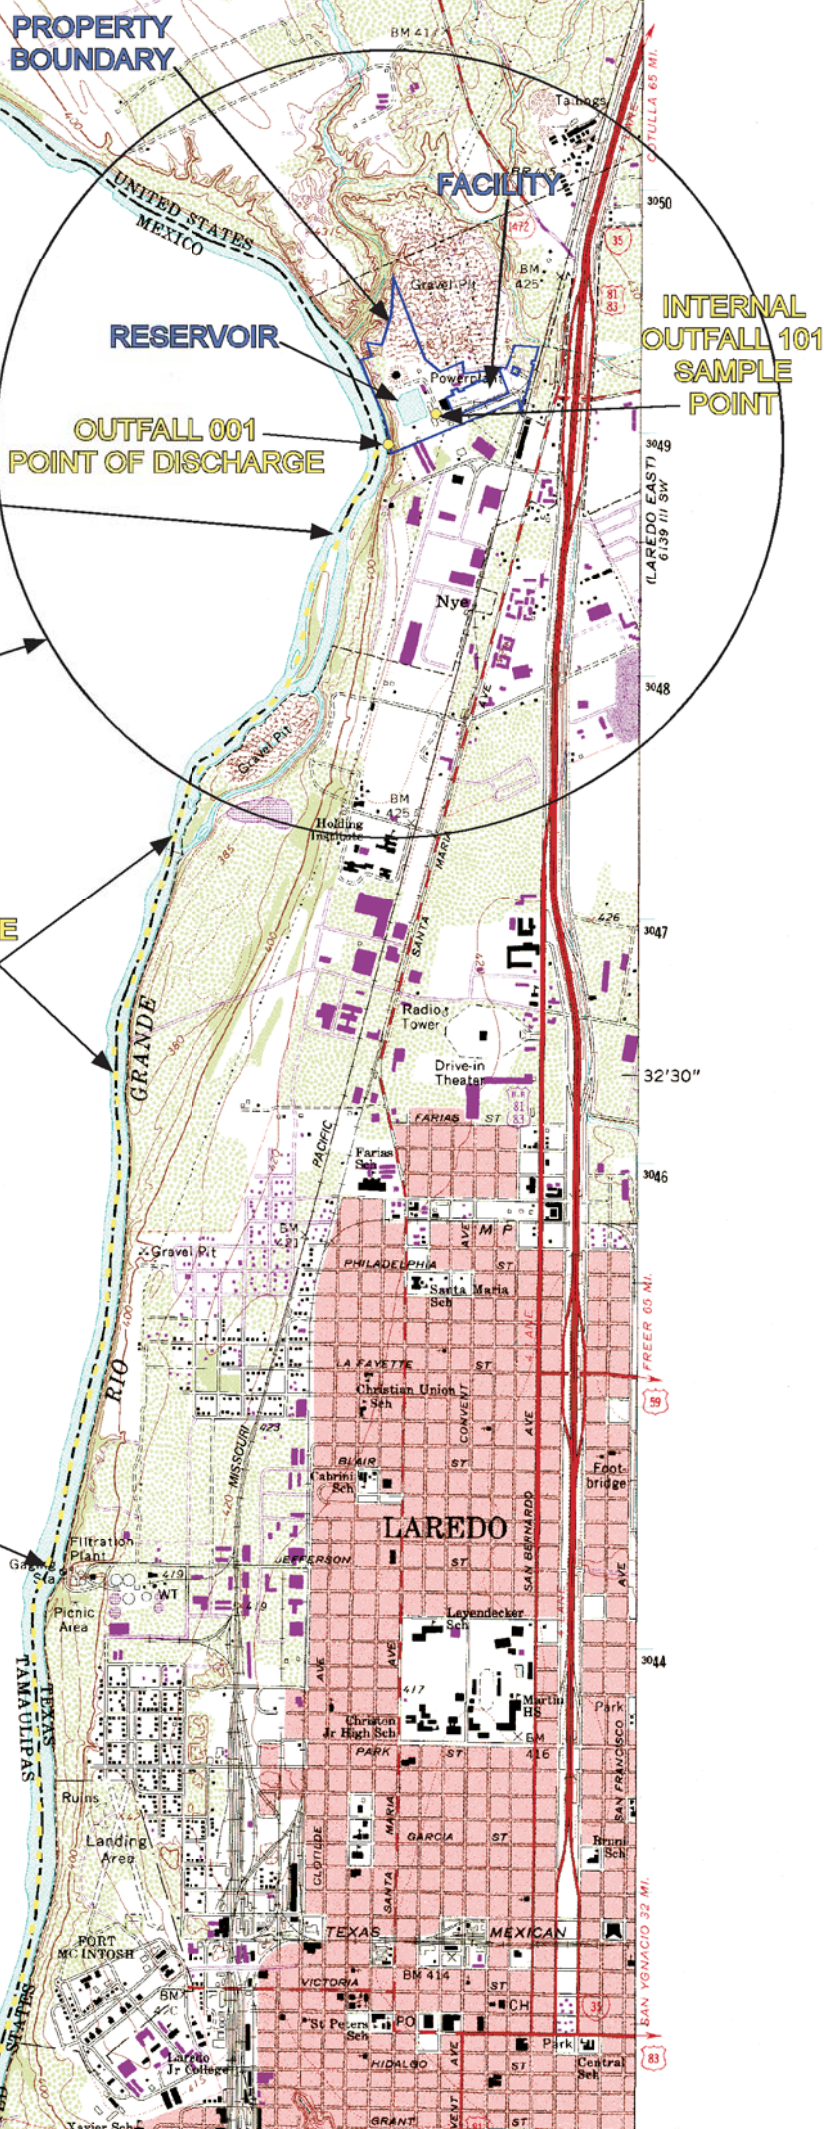

 Interstate Route U. S. Route State Route

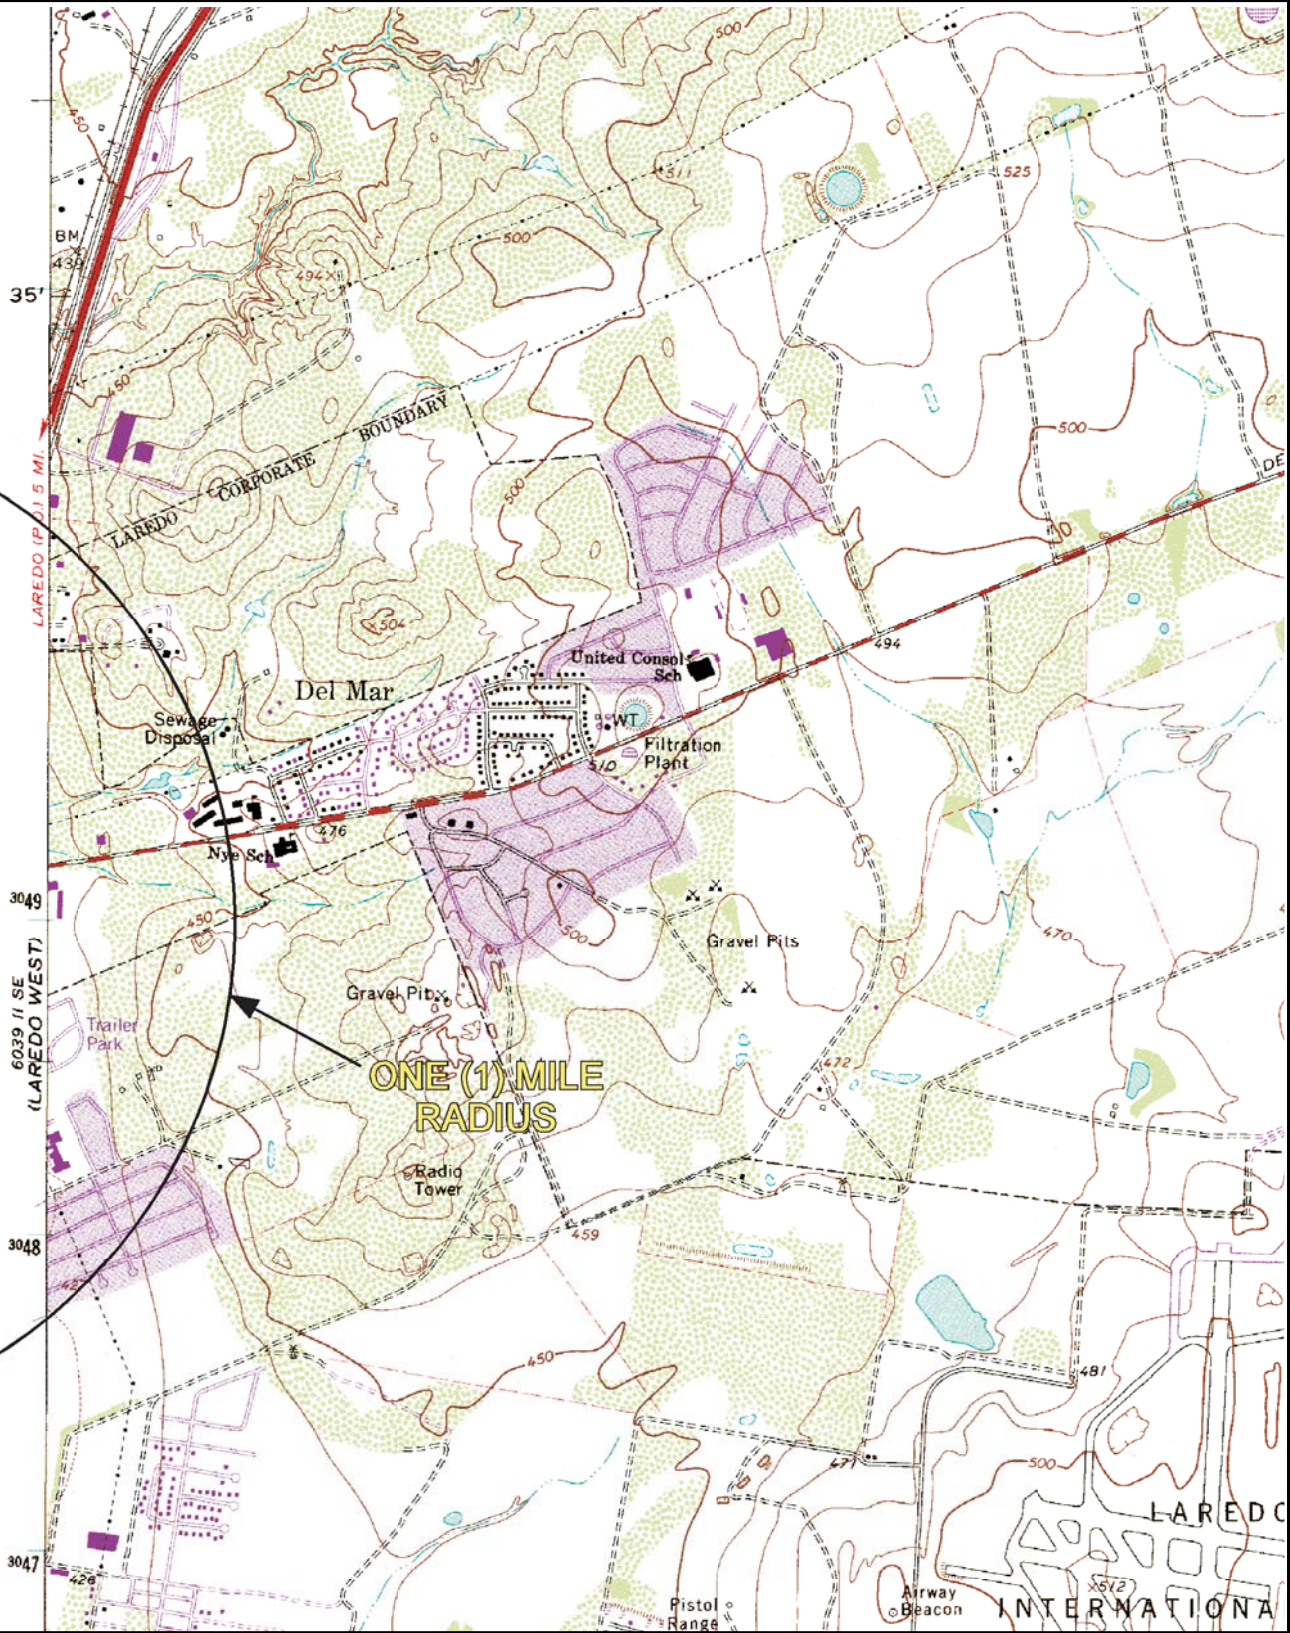

P. O. Box 3247
Humble, TX 77347-3247
(281) 446-7070 Fax (281) 446-3348

Location on 7.5 Minute USGS Topo Quads:
Laredo West, Texas; Zone 14



Approximate
Location

SITE LOCATION USGS MAP

City Public Service Board - Laredo Power Station
Laredo, Webb County, Texas

DRAWN BY: AKD/HJC

DATE: 2/17/2020 / REV 5/12/2025

ONE (1) INCH = 2,000 FEET




DRAWING ID: Y:\LAR\LARI\WWW\RNW19_2207211570102010\Figure1-2_Laredo East.cvx

FIGURE

1-2



FIGURE 2
FACILITY LAYOUT MAP
(TECHNICAL REPORT 1.0, p. 2, Item 1.d)

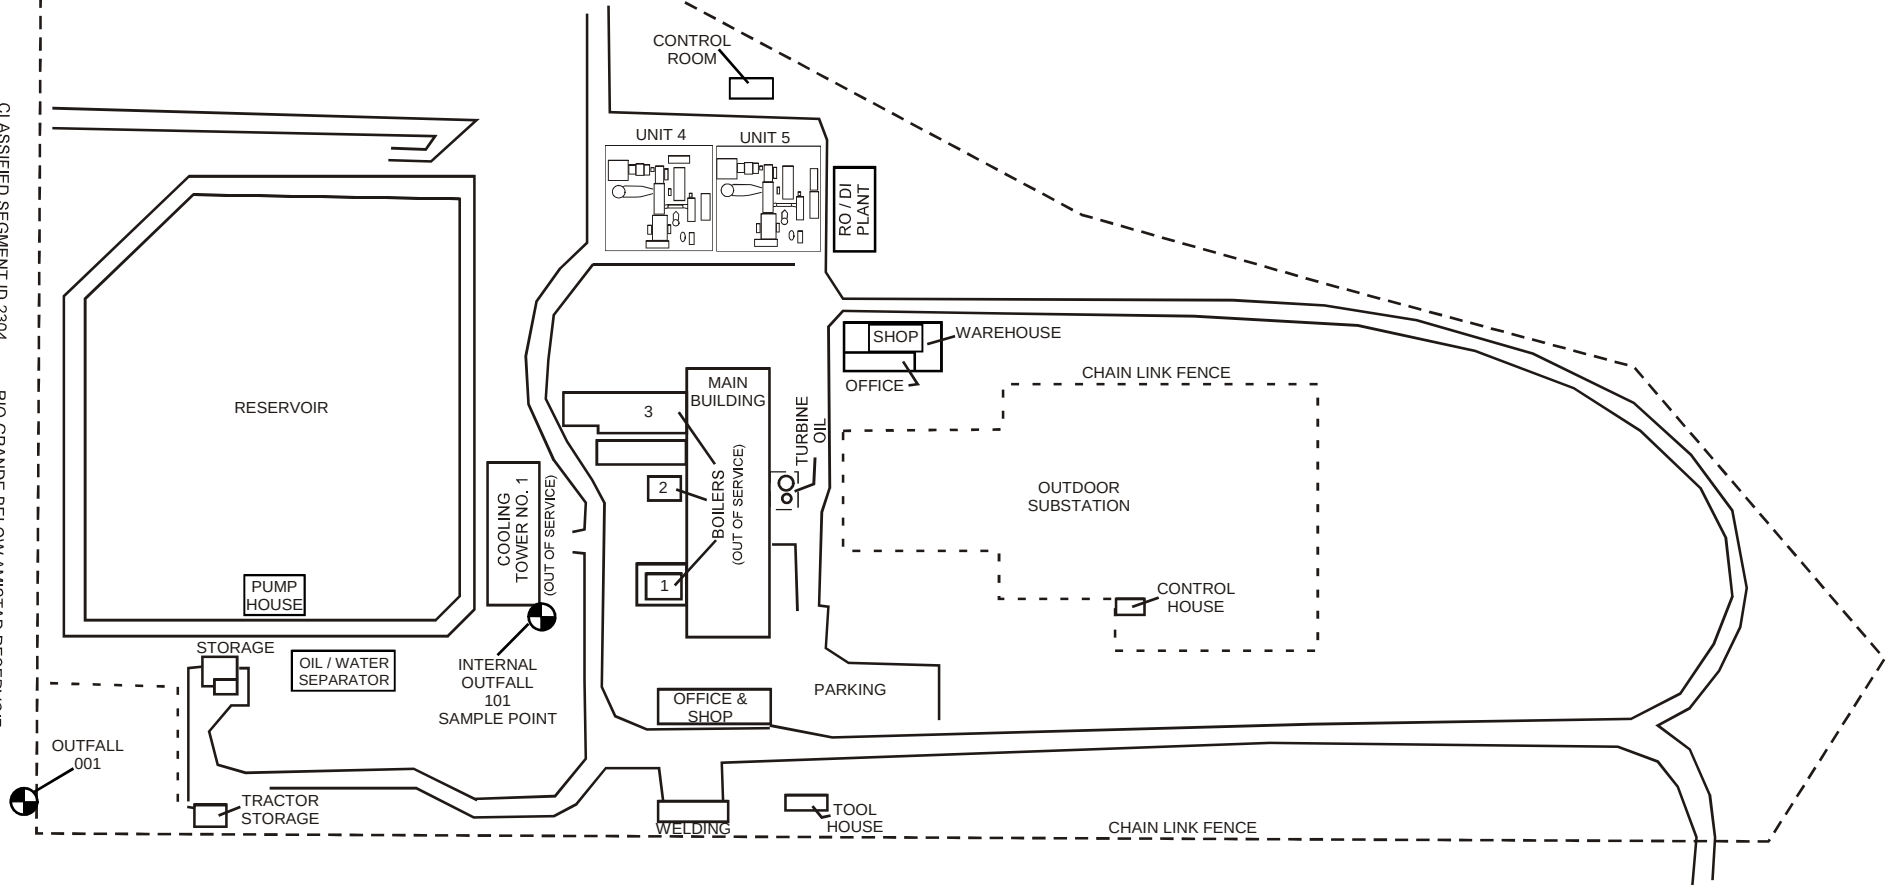

The WCM Group, Inc.
P. O. Box 3247
Humble, TX 77347-3247
(281) 446-7070 Fax (281) 446-3348

FACILITY LAYOUT MAP

City Public Service Board
Laredo Power Station
Laredo, Webb County, Texas

DRAWN BY: **LLB/HJC**

DATE: **03/14/2005**

REV. DATE: **5/12/2025**

DRAWING ID: Y:\LAR\LAR\Figures\TPDES Figure 2.cvx


NOT TO SCALE

FIGURE

2



FIGURE 3
WASTEWATER PROCESS FLOW DIAGRAM
(TECHNICAL REPORT 1.0, p.3, Item 2.b and
TECHNICAL REPORT WORKSHEET 1.0, p. 17, Item 3)

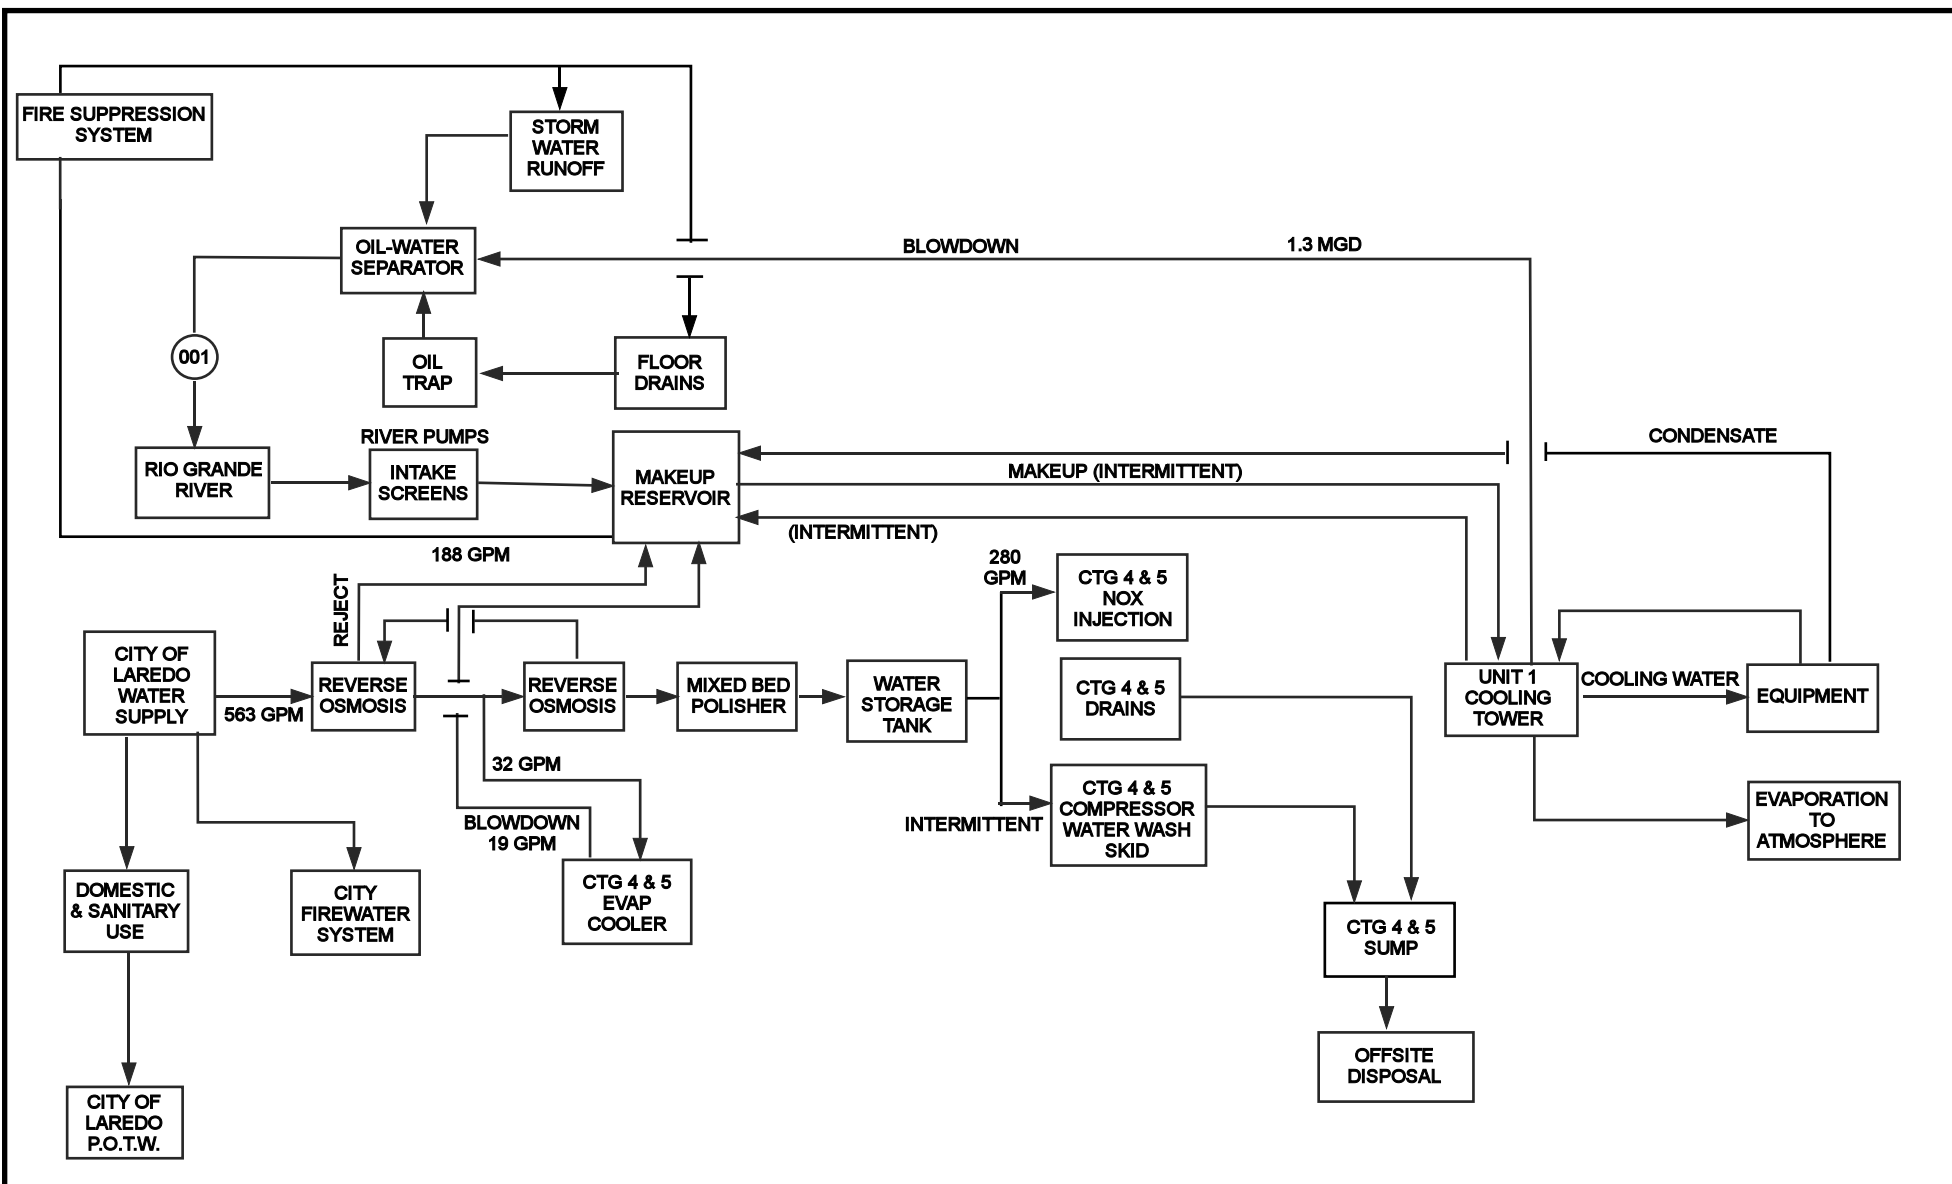

The WCM Group, Inc.
 P. O. Box 3247
 Humble, TX 77347-3247
 (281) 446-7070 Fax (281) 446-3348

SIMPLE CYCLE PROCESS FLOW DIAGRAM

City Public Service Board
 Laredo Power Station
 Laredo, Webb County, Texas

DRAWN BY: **AKD / HJC**

DATE: **11/29/2007**

REV. DATE: **5/12/2025**

DRAWING ID:

Y:\LAR\LAR\Figures\TPDES Figure 3

FIGURE

3



THE WCM GROUP, INC.
110 S. Bender Ave., Humble, TX 77338
P.O. Box 3247, Humble, TX 77347

July 25, 2025

Ms. Leah Wallon
Applications Review and Processing Team (MC148)
Texas Commission of Environmental Quality
Water Quality Division
12100 Park 35 Circle
Austin, Texas 78753

VIA EMAIL

Reference: Response to Notice of Deficiency (NOD)
Application to Renew Permit No. WQ0001200000 (EPA I.D. TX0001627)
City Public Service Board - Laredo Power Station
CN600129019; RN100213909

Dear Ms. Wallon:

On behalf of City Public Service Board - Laredo Power Station, The WCM Group, Inc. (WCM) is submitting the following response to the Administrative Deficiency letter dated July 24, 2025 (see Attachment A) for the above referenced wastewater permit renewal application. Each of the items in your letter are restated here with comments/responses below.

COMMENT 1

The following is a portion of the Notice of Receipt of Application and Intent to Obtain a Water Quality Permit which contains information relevant to your application. Please read it carefully and indicate if it contains any errors or omissions. The complete notice will be sent to you once the application is declared administratively complete.

APPLICATION. City Public Service Board, 500 McCulough Avenue, San Antonio, Texas 78215, which owns a natural gas-fired power generation facility, has applied to the Texas Commission on Environmental Quality (TCEQ) to renew Texas Pollutant Discharge Elimination System (TPDES) Permit No. WQ0001200000 (EPA I.D. No. TX0001627) to authorize the discharge of treated wastewater and stormwater at a volume not to exceed a daily average flow of 1,300,000 gallons per day. The facility is located at 7300 CPL Road, in the city of Laredo, in Webb County, Texas 78041. The discharge route is from the plant site directly to Rio Grande Below Amistad Reservoir. TCEQ received this application on July 16,

2025. The permit application will be available for viewing and copying at Joe A. Guerra Laredo Public Library, 1120 East Calton Road, Laredo, in Webb County, Texas prior to the date this notice is published in the newspaper. The application, including any updates, and associated notices are available electronically at the following webpage:

<https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

This link to an electronic map of the site or facility's general location is provided as a public courtesy and not part of the application or notice. For the exact location, refer to the application.

<https://gisweb.tceq.texas.gov/LocationMapper/?marker=-99.508611,27.566944&level=18>

Further information may also be obtained from City Public Service Board at the address stated above or by calling Ms. Summer Johnson, Environmental Analyst, at 210-353-2770.

RESPONSE 1

APPLICATION. City Public Service Board, 500 McCullough McCullough Avenue, San Antonio, Texas 78215, which owns a natural gas-fired power generation facility, has applied to the Texas Commission on Environmental Quality (TCEQ) to renew Texas Pollutant Discharge Elimination System (TPDES) Permit No. WQ0001200000 (EPA I.D. No. TX0001627) to authorize the discharge of treated wastewater and stormwater at a volume not to exceed a daily average flow of 1,300,000 gallons per day. The facility is located at 7300 CPL Road, in the city of Laredo, in Webb County, Texas 78041. The discharge route is from the plant site directly to the Rio Grande Below Amistad Reservoir. TCEQ received this application on July 16, 2025. The permit application will be available for viewing and copying at Joe A. Guerra Laredo Public Library, 1120 East Calton Road, Laredo, in Webb County, Texas prior to the date this notice is published in the newspaper. The application, including any updates, and associated notices are available electronically at the following webpage:

<https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

This link to an electronic map of the site or facility's general location is provided as a public courtesy and not part of the application or notice. For the exact location, refer to the application.

<https://gisweb.tceq.texas.gov/LocationMapper/?marker=-99.508611,27.566944&level=18>

Further information may also be obtained from City Public Service Board at the address stated above or by calling Ms. Summer Johnson, Environmental Analyst, at 210-353-2770.

COMMENT 2

The application indicates that public notices in Spanish are required. After confirming the portion of the NORI above does not contain any errors or omissions, please use the attached template to translate the NORI into Spanish. Only the first and last paragraphs are unique to this application and require translation. Please provide the translated Spanish NORI in a Microsoft Word document.

RESPONSE 2

The translated Spanish NORI is provided as separately in a Microsoft Word document, as requested. Changes identified above in the English NORI have already been incorporated in the Spanish NORI.

Should you have any questions regarding this application or require any additional information, please contact me at 281-446-7070.

Sincerely,

A handwritten signature in black ink that reads "Hailey Cofty". The signature is fluid and cursive, with the first name "Hailey" and last name "Cofty" clearly distinguishable.

Hailey Cofty

Senior Project Manager, Technical Services

hcofty@wcmgroup.com

HJC/ala

Enclosures

ATTACHMENT A
TCEQ NOTICE OF DEFICIENCY LETTER DATED JULY 24, 2025

Brooke T. Paup, *Chairwoman*
Bobby Janecka, *Commissioner*
Catarina R. Gonzales, *Commissioner*
Kelly Keel, *Executive Director*



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

Protecting Texas by Reducing and Preventing Pollution

July 24, 2025

Ms. Summer Johnson
Environmental Analyst
CPS Energy
500 McCulough Avenue
San Antonio, Texas 78215

RE: Application to Renew Permit No.: WQ0001200000 (EPA I.D. No. TX0001627)
Applicant Name: City Public Service Board (CN600129019)
Site Name: Laredo Power Station (RN100213909)
Type of Application: Renewal without changes

VIA EMAIL

Dear Ms. Johnson:

We have received the application for the above-mentioned permit, and it is currently under review. Your attention to the following items is requested before we can declare the application administratively complete. Please submit responses to the following items via email.

1. The following is a portion of the NORI which contains information relevant to your application. Please read it carefully and indicate if it contains any errors or omissions. The complete notice will be sent to you once the application is declared administratively complete.

APPLICATION. City Public Service Board, 500 McCulough Avenue, San Antonio, Texas 78215, which owns a natural gas-fired power generation facility, has applied to the Texas Commission on Environmental Quality (TCEQ) to renew Texas Pollutant Discharge Elimination System (TPDES) Permit No. WQ0001200000 (EPA I.D. No. TX0001627) to authorize the discharge of treated wastewater and stormwater at a volume not to exceed a daily average flow of 1,300,000 gallons per day. The facility is located at 7300 CPL Road, in the city of Laredo, in Webb County, Texas 78041. The discharge route is from the plant site directly to Rio Grande Below Amistad Reservoir. TCEQ received this application on July 16, 2025. The permit application will be available for viewing and copying at Joe A. Guerra Laredo Public Library, 1120 East Calton Road, Laredo, in Webb County, Texas prior to the date this notice is published in the newspaper. The application, including any updates, and associated notices are available electronically at the following webpage:

<https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

This link to an electronic map of the site or facility's general location is provided as a public courtesy and not part of the application or notice. For the exact location, refer to the application.

<https://gisweb.tceq.texas.gov/LocationMapper/?marker=-99.508611,27.566944&level=18>


Further information may also be obtained from City Public Service Board at the address stated above or by calling Ms. Summer Johnson, Environmental Analyst, at 210-353-2770.

Ms. Summer Johnson
Page 2
July 24, 2025
Permit No. WQ0001200000

2. The application indicates that public notices in Spanish are required. After confirming the portion of the NORI above does not contain any errors or omissions, please use the attached template to translate the NORI into Spanish. Only the first and last paragraphs are unique to this application and require translation. Please provide the translated Spanish NORI in a Microsoft Word document.

Please submit the complete response addressed to my attention by August 7, 2025. If you should have any questions, please do not hesitate to contact me by phone at (512) 239-0084 or by email at leah.whallon@tceq.texas.gov

Sincerely,



Leah Whallon
Applications Review and Processing Team (MC148)
Water Quality Division
Texas Commission of Environmental Quality

lcw

Enclosure
Industrial Discharge Renewal Spanish NORI

cc: Ms. Hailey Cofty, Senior Project Manager, The WCM Group, Inc., P.O. Box 3247, Humble, Texas 77347

Comisión de Calidad Ambiental del Estado de Texas



AVISO DE RECIBO DE LA SOLICITUD Y EL INTENTO DE OBTENER PERMISO PARA LA CALIDAD DEL AGUA RENOVACION

PERMISO NO. WQ000

SOLICITUD. *City Public Service Board, 500 McCullough Avenue, San Antonio, Texas 78215 que posee una planta de generación de energía a gas natural*, ha solicitado a la Comisión de Calidad Ambiental del Estado de Texas (TCEQ) para renovar el Permiso No. WQ0001200000 (EPA I.D. No. TX 0001627) del Sistema de Eliminación de Descargas de Contaminantes de Texas (TPDES) para autorizar la descarga de aguas residuales tratadas en un volumen que no sobrepasa un flujo promedio diario de *1,300,000* galones por día. La planta está ubicada *7300 CPL Road en la ciudad de Laredo* en el Condado de *Webb*, Texas *78041*. La ruta de descarga es del sitio de la planta *directamente al Río Grande debajo del embalse de la Amistad*. La TCEQ recibió esta solicitud el *July 16, 2025*. La solicitud para el permiso estará disponible para leerla y copiarla en *Joe A. Guerra Laredo Public Library, 1120 East Calton Road, Laredo, en el Condado de Webb* antes de la fecha de publicación de este aviso en el periódico. La solicitud (cualquier actualización y aviso inclusive) está disponible electrónicamente en la siguiente página web: <https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

Este enlace a un mapa electrónico de la ubicación general del sitio o de la instalación es proporcionado como una cortesía y no es parte de la solicitud o del aviso. Para la ubicación exacta, consulte la solicitud.

<https://gisweb.tceq.texas.gov/LocationMapper/?marker=-99.508611,27.566944&level=18>

AVISO DE IDIOMA ALTERNATIVO. El aviso de idioma alternativo en español está disponible en <https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

AVISO ADICIONAL. El Director Ejecutivo de la TCEQ ha determinado que la solicitud es administrativamente completa y conducirá una revisión técnica de la solicitud. Después de completar la revisión técnica, el Director Ejecutivo puede preparar un borrador del permiso y emitirá una Decisión Preliminar sobre la solicitud. **El aviso de la solicitud y la decisión preliminar serán publicados y enviado a los que están en la lista de correo de las personas a lo largo del condado que desean recibir los avisos y los que están en la lista de correo que desean recibir avisos de esta solicitud. El aviso dará la fecha límite para someter comentarios públicos.**

COMENTARIO PUBLICO / REUNION PUBLICA. Usted puede presentar comentarios públicos o pedir una reunión pública sobre esta solicitud. El propósito de una reunión pública es dar la oportunidad de presentar comentarios o hacer preguntas acerca de la solicitud. La TCEQ

realiza una reunión pública si el Director Ejecutivo determina que hay un grado de interés público suficiente en la solicitud o si un legislador local lo pide. Una reunión pública no es una audiencia administrativa de lo contencioso.

OPORTUNIDAD DE UNA AUDIENCIA ADMINISTRATIVA DE LO CONTENCIOSO. Después del plazo para presentar comentarios públicos, el Director Ejecutivo considerará todos los comentarios apropiados y preparará una respuesta a todo los comentarios públicos esenciales, pertinentes, o significativos. **A menos que la solicitud haya sido referida directamente a una audiencia administrativa de lo contencioso, la respuesta a los comentarios y la decisión del Director Ejecutivo sobre la solicitud serán enviados por correo a todos los que presentaron un comentario público y a las personas que están en la lista para recibir avisos sobre esta solicitud. Si se reciben comentarios, el aviso también proveerá instrucciones para pedir una reconsideración de la decisión del Director Ejecutivo y para pedir una audiencia administrativa de lo contencioso.** Una audiencia administrativa de lo contencioso es un procedimiento legal similar a un procedimiento legal civil en un tribunal de distrito del estado.

PARA SOLICITAR UNA AUDIENCIA DE CASO IMPUGNADO, USTED DEBE INCLUIR EN SU SOLICITUD LOS SIGUIENTES DATOS: su nombre, dirección, y número de teléfono; el nombre del solicitante y número del permiso; la ubicación y distancia de su propiedad/actividad con respecto a la instalación; una descripción específica de la forma cómo usted sería afectado adversamente por el sitio de una manera no común al público en general; una lista de todas las cuestiones de hecho en disputa que usted presente durante el período de comentarios; y la declaración "[Yo/nosotros] solicito/solicitamos una audiencia de caso impugnado". Si presenta la petición para una audiencia de caso impugnado de parte de un grupo o asociación, debe identificar una persona que representa al grupo para recibir correspondencia en el futuro; identificar el nombre y la dirección de un miembro del grupo que sería afectado adversamente por la planta o la actividad propuesta; proveer la información indicada anteriormente con respecto a la ubicación del miembro afectado y su distancia de la planta o actividad propuesta; explicar cómo y porqué el miembro sería afectado; y explicar cómo los intereses que el grupo desea proteger son pertinentes al propósito del grupo.

Después del cierre de todos los períodos de comentarios y de petición que aplican, el Director Ejecutivo enviará la solicitud y cualquier petición para reconsideración o para una audiencia de caso impugnado a los Comisionados de la TCEQ para su consideración durante una reunión programada de la Comisión.

La Comisión sólo puede conceder una solicitud de una audiencia de caso impugnado sobre los temas que el solicitante haya presentado en sus comentarios oportunos que no fueron retirados posteriormente. **Si se concede una audiencia, el tema de la audiencia estará limitado a cuestiones de hecho en disputa o cuestiones mixtas de hecho y de derecho relacionadas a intereses pertinentes y materiales de calidad del agua que se hayan presentado durante el período de comentarios. Si ciertos criterios se cumplen, la TCEQ puede actuar sobre una solicitud para renovar un permiso sin proveer una oportunidad de una audiencia administrativa de lo contencioso.**

LISTA DE CORREO. Si somete comentarios públicos, un pedido para una audiencia administrativa de lo contencioso o una reconsideración de la decisión del Director Ejecutivo,

la Oficina del Secretario Principal enviará por correo los avisos públicos en relación con la solicitud. Además, puede pedir que la TCEQ ponga su nombre en una o más de las listas correos siguientes (1) la lista de correo permanente para recibir los avisos del solicitante indicado por nombre y número del permiso específico y/o (2) la lista de correo de todas las solicitudes en un condado específico. Si desea que se agregue su nombre en una de las listas designe cual lista(s) y envía por correo su pedido a la Oficina del Secretario Principal de la TCEQ.

INFORMACIÓN DISPONIBLE EN LÍNEA. Para detalles sobre el estado de la solicitud, favor de visitar la Base de Datos Integrada de los Comisionados en www.tceq.texas.gov/goto/cid. Para buscar en la base de datos, utilizar el número de permiso para esta solicitud que aparece en la parte superior de este aviso.

CONTACTOS E INFORMACIÓN A LA AGENCIA. Todos los comentarios públicos y solicitudes deben ser presentadas electrónicamente vía <http://www14.tceq.texas.gov/epic/eComment/> o por escrito dirigidos a la Comisión de Texas de Calidad Ambiental, Oficial de la Secretaría (Office of Chief Clerk), MC-105, P.O. Box 13087, Austin, Texas 78711-3087. Tenga en cuenta que cualquier información personal que usted proporcione, incluyendo su nombre, número de teléfono, dirección de correo electrónico y dirección física pasarán a formar parte del registro público de la Agencia. Para obtener más información acerca de esta solicitud de permiso o el proceso de permisos, llame al programa de educación pública de la TCEQ, gratis, al 1-800-687-4040. Si desea información en Español, puede llamar al 1-800-687-4040.

También se puede obtener información adicional del *City Public Service Board* a la dirección indicada arriba o llamando a *Ms. Summer Johnson, Análisis ambiental*, al 210-353-2770.

Fecha de emisión: *[Date notice issued]*

Hailey V. Cofty

From: Leah Whallon <Leah.Whallon@Tceq.Texas.Gov>
Sent: Monday, August 11, 2025 11:36 AM
To: Hailey V. Cofty
Cc: Summer L. Johnson
Subject: NORI for Permit No. WQ0001200000; City Public Service Board; Laredo Power Station
Attachments: wq0001200000-nori-letter.pdf; wq0001200000-nori-eng.pdf; wq0001200000-nori-esp.pdf; NORI Instructions Combined.pdf

Good Morning,

Permit No. WQ0001200000

Applicants are required to publish the Notice of Receipt of Application and Intent to Obtain a Water Quality Permit (NORI) within 30 days of the application being declared administratively complete.

Attached are:

- Letter of Declaration of Administrative Completeness
- Notice of Receipt of Application and Intent to Obtain a Water Quality Permit
- Notice of Receipt of Application and Intent to Obtain a Water Quality Permit in Spanish Language
- Instructions of Public Notice
- Public Notice Verification Form
- Affidavit of Publication

IMPORTANT: You must enter the Applicant Name and Permit Number into the sections provided in the upper right portion of the Affidavit of Publication. The CID or CCO Number section does not need to be entered and is intended for internal use only.

Please let me know if you have any questions.

Thank you,



Leah Whallon
Texas Commission on Environmental Quality
Water Quality Division
512-239-0084
leah.whallon@tceq.texas.gov

How is our customer service? Fill out our online customer satisfaction survey at www.tceq.texas.gov/customersurvey

Brooke T. Paup, *Chairwoman*
Bobby Janecka, *Commissioner*
Catarina R. Gonzales, *Commissioner*
Kelly Keel, *Executive Director*



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

Protecting Texas by Reducing and Preventing Pollution

August 11, 2025

Ms. Hailey Cofty
Senior Project Manager
The WCM Group, Inc.
P.O. Box 3247
Humble, Texas 77347

RE: Declaration of Administrative Completeness
Applicant Name: City Public Service Board (CN600129019)
Permit No.: WQ0001200000 (EPA I.D. No. TX0001627)
Site Name: Laredo Power Station (RN100213909)
Type of Application: Renewal without changes

Dear Ms. Cofty:

The executive director has declared the above referenced application, received on July 16, 2025, administratively complete on August 11, 2025.

You are now required to publish notice of your proposed activity and make a copy of the application available for public review. The following items are included to help you meet the regulatory requirements associated with this notice:

- Instructions for Public Notice
- Notice for Newspaper Publication
- Public Notice Verification Form
- Publisher's Affidavits

You must follow all the directions in the enclosed instructions. The most common mistakes are the unauthorized changing of notice, wording, or font. If you fail to follow these instructions, you may be required to republish the notices.

The following requirements are also described in the enclosed instructions. However, due to their importance, they are highlighted here as well.

1. Publish the enclosed notice within **30 calendar days** after your application is declared administratively complete. (See this letter's first paragraph for the declaration date.) **You may be required to publish the notice in more than one newspaper, including a newspaper published in an alternative language, to satisfy all of the notice requirements.**
2. On or before the date you publish notice, place a copy of your permit application in a public place in the county where the facility is or will be located. This copy must be accessible to the public for review and copying, must be updated to reflect changes to the application, and must remain in place throughout the comment period.


Ms. Hailey Cofty
Page 2
August 11, 2025
Permit No. WQ0001200000

3. For each publication, submit proof of publication of the notice that shows the publication date and newspaper name to the Office of the Chief Clerk within **30 calendar days** after notice is published in the newspaper.
4. Return the original enclosed Public Notice Verification and the Publisher's Affidavits to the Office of the Chief Clerk within **30 calendar days** after the notice is published in the newspaper.

If you do not comply with **all** the requirements described in the instructions, further processing of your application may be suspended, or the agency may take other actions.

If you have any questions regarding publication requirements, please contact the Office of Legal Services at (512) 239-0600. If you have any questions regarding the content of the notice, please contact Leah Whallon at (512) 239-0084 or leah.whallon@tceq.texas.gov.

Sincerely,

A handwritten signature in black ink that reads "J E Bowers". The signature is written in a cursive, flowing style.

Jennifer E. Bowers
Section Manager, Water Quality Division Support
Office of Water
Texas Commission of Environmental Quality

JEB/lcw

Enclosures

Texas Commission on Environmental Quality

Instructions for Public Notice for a Water Quality Permit

Notice of Receipt of Application and Intent to Obtain a Permit (NORI)

Your application has been declared administratively complete. You must comply with the following instructions. There are seven (7) steps involved in publishing notice. Complete each step.

1. REVIEW THE NOTICE FOR ACCURACY

Read the enclosed notice carefully and notify the Application Review and Processing Team at 512-239-4671 immediately if it contains any errors or omissions. You are responsible for ensuring the accuracy of all information published. Do not change the text or formatting of the notice or affidavit of publication without prior approval from the TCEQ. Changing the text or formatting of the notice may require new publication at your expense and delay processing of your application.

2. PUBLISH THE NOTICE IN THE NEWSPAPER

You must publish the enclosed notice as soon as possible, but no later than 30 days from the date of administrative completeness. Refer to the cover letter for the date of administrative completeness.

You must publish the enclosed notice at your expense, at least once in the newspaper of largest circulation within each county where the facility and discharge point are located or will be located. If the facility and discharge point are located or will be located in a municipality, the enclosed notice must be published at least once in a newspaper of general circulation in the municipality. These requirements may be satisfied by one publication if the newspaper meets all of the above requirements.

The bold text of the enclosed notice must be printed in the newspaper in a font style or size that distinguishes it from the rest of the notice (i.e., bold, italics). Failure to do so may require re-notice.

3. PUBLISH THE NOTICE IN AN ALTERNATIVE LANGUAGE

You must publish notice in an alternative language IF: either the elementary or middle school nearest to the facility or proposed facility is required to provide a "bilingual education program" (BEP) as required by Texas Education Code (TEC), Chapter 29, Subchapter B, and 19 Tex. Admin. Code §89.1205(a) AND one of the following conditions is met:

- students are enrolled in a program at that school;
- students from that school attend a bilingual education program at another location; or
- the school that otherwise would be required to provide a bilingual education program has been granted an exception from the requirements to provide the program as provided for in 19 Tex. Admin. Code §89.1207(a).

A "bilingual education program" is different from an "English as a second language program" (ESL). An ESL program alone, will not require public notice in an alternative language.

If triggered, you must publish the notice in a newspaper or publication primarily published in the alternative language taught in the bilingual education program. Publication in an alternative language section or insert within a large publication which is not printed primarily in that

alternative language does not satisfy these requirements. The newspaper or publication must be of general circulation in the county in which the facility and discharge point are located or proposed to be located. If the facility and discharge point are located or proposed to be located in a municipality, and there exists a newspaper or publication of general circulation in the municipality, you must publish the notice only in the newspaper or publication in the municipality.

You must demonstrate a good faith effort to identify a newspaper or publication in the required language. If there is no general circulation newspaper or publication printed in such language, then publishing in that language is not required. You have the burden to demonstrate compliance with these requirements.

If you are required to publish notice in Spanish, you must translate the site-specific information in the notice that is specific to your application, at your own expense. You may then insert the Spanish translation of your site-specific information into a Spanish template developed by the TCEQ. The Spanish templates are available on the TCEQ website at www.tceq.texas.gov/permitting/wastewater/review/napd/wqspanish_napd.html. If you are required to publish notice in a language other than Spanish, you must translate the entire public notice, at your own expense.

4. PUT THE APPLICATION IN A PUBLIC PLACE

You must put a copy of the administratively complete application in the public place identified in the enclosed notice.

This copy must be accessible to the public for review and copying beginning on the first day of newspaper publication and remain in place for the publication's designated comment period.

During the technical review, you must update the publicly available application so that it includes all application revisions within 10 business days from the date the revision is transmitted to the TCEQ.

For confidential information contained in the application, you must indicate which specific portions of the application cannot be made available to the public. These portions of the application must be accompanied with the following statement: "Any request for portions of this application that are marked as confidential must be submitted in writing, pursuant to the Public Information Act, to the TCEQ Public Information Coordinator, MC 197, P.O. Box 13087, Austin, Texas 78711-3087."

5. PROVIDE PROOF OF PUBLICATION

For each newspaper in which you published, you must submit proof of publication.

Proof of publication must include the following:

- a completed Publisher's Affidavit (enclosed); and
- a copy of the published notice which shows the notice, the date published, and the newspaper name. The copy must be on standard-size 8½ x 11" paper and must show the actual size of the published notice. Do not reduce the image when making copies. Published notices longer than 11" must be copied onto multiple 8½ x 11" pages. Or you can submit the original newspaper clipping.

If you are required to publish notice in an alternative language and are unable to do so, complete and submit the Alternative Language Exemption form (enclosed).

6. PROVIDE PROOF OF APPLICATION VIEWING LOCATION

You must submit a completed Public Notice Verification Form (enclosed), which certifies that the administratively complete application was placed at the public place identified in the enclosed notice.

7. SUBMIT PROOFS TO TCEQ

You must submit the proof of publication documents (Step 5) and the completed Public Notice Verification Form (Step 6) to TCEQ **within 30 days of publication.**

Scan and email to: PROOFS@tceq.texas.gov;

Or Mail to:

TCEQ
Office of the Chief Clerk, MC 105
Attn: Notice Team
P.O. Box 13087
Austin, Texas 78711-3087

Additional Information

If you fail to publish the notice or submit proofs within the timeframes noted above, the TCEQ may suspend further processing on your application or take other actions in accordance with 30 Tex. Admin. Code §39.405(a).

If you have any questions regarding publication requirements, please contact the Office of Legal Services at 512-239-0600. If you have any questions regarding the content of the notice, please contact the Application Review and Processing Team at 512-239- 4671. When contacting TCEQ regarding this application, please refer to the permit number at the top of the enclosed notice.

If you wish to obtain an electronic copy of the notice, please visit our web site at www.tceq.texas.gov/agency/decisions/cc/cc_db.html or www.tceq.texas.gov/agency/decisions/cc/eda.html. Please be aware that formatting codes may be lost and that any notices downloaded from these web sites must be reformatted by you so that your downloaded copy looks like the notice document you received from us.

TCEQ-OFFICE OF THE CHIEF CLERK
MC-105 Attn: Notice Team
P.O. BOX 13087
AUSTIN, TX 78711-3087

APPLICANT NAME: _____
PERMIT NO.: _____
NOTICE OF RECEIPT OF APPLICATION AND
INTENT TO OBTAIN WATER QUALITY PERMIT

**PUBLISHER'S AFFIDAVIT
FOR WATER QUALITY PERMITS**

STATE OF TEXAS §
COUNTY OF _____ §

Before me, the undersigned authority, on this day personally appeared

_____, who being by me duly
(name of person representing newspaper)

sworn, deposes and says that (s)he is the _____
(title of person representing newspaper)

of the _____; that this newspaper is
(name of newspaper)

a newspaper of largest circulation in _____ County, Texas,
(name of county)

or is a newspaper of general circulation in _____ Texas,
(name of municipality)

and that the enclosed notice was published in said newspaper on the following date(s):

(date or dates, of publication in the newspaper)

Newspaper Representative's Signature

Subscribed and sworn to before me this the ____ day of _____,
20____, to certify which witness my and seal of office.

(Seal)

Notary Public in and for the State of Texas

Print or Type Name of Notary Public

My Commission Expires _____

TCEQ-OFFICE OF THE CHIEF CLERK
MC-105 Attn: Notice Team
P.O. BOX 13087
AUSTIN, TX 78711-3087

APPLICANT NAME: _____
PERMIT NO.: _____
NOTICE OF RECEIPT OF APPLICATION AND
INTENT TO OBTAIN WATER QUALITY PERMIT

ALTERNATIVE LANGUAGE PUBLISHER'S AFFIDAVIT

STATE OF TEXAS §
COUNTY OF _____ §

Before me, the undersigned authority, on this day personally appeared

_____, who being by me duly
(name of person representing newspaper)

sworn, deposes and says that (s)he is the _____
(title of person representing newspaper)

of the _____;
(name of newspaper)

generally circulated in _____ County, Texas,
(same county as proposed facility)

and is published primarily in _____ language;
(alternative language)

and that the enclosed notice was published in said newspaper on the following date(s):

(date or dates, of publication in the newspaper)

Newspaper Representative's Signature

Subscribed and sworn to before me this the ____ day of _____,
20_____, to certify which witness my and seal of office.

(Seal)

Notary Public in and for the State of Texas

Print or Type Name of Notary Public

My Commission Expires _____



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY
Public Notice Verification Form
Notice of Receipt of Application and
Intent to Obtain a Water Quality Permit
(NORI)

All applicants must complete this page.

Applicant Name: _____

Site or Facility Name: _____

Water Quality Permit Number: WQ00_____

Regulated Entity Number: RN_____ Customer Number: CN_____

PUBLIC VIEWING LOCATION

I certify that a copy of the complete water quality application, and all revisions, were placed at the following public place for public viewing and copying. I understand that the copy will remain available at the public place from the 1st day of publication of the NORI until the end of the designated comment period. I further understand that the copy will be updated with any revisions to the application.

Name of Public Place: _____

Address of Public Place: _____

Applicant or Applicant Representative Signature: _____

Title: _____ Date: _____



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY
Public Notice Verification Form
Notice of Receipt of Application and
Intent to Obtain a Water Quality Permit
(NORI)

Complete this page only if you are required to publish in an alternative language and are not able to do so.

Applicant Name: _____

Site or Facility Name: _____

Water Quality Permit Number: WQ00_____

Regulated Entity Number: RN_____ Customer Number: CN_____

ALTERNATIVE LANGUAGE EXEMPTION

I certify that I have conducted a diligent search for a newspaper or publication of general circulation in both the municipality and county in which the facility is located or proposed to be located and was unable to publish the notice in the required alternative language because:

☐

A newspaper or publication could not be found in any of the alternative languages in which notice is required.

☐

The publishers of the newspapers listed below refused to publish the notice as requested, and another newspaper or publication in the same language and of general circulation could not be found in the municipality or county in which the facility is located or proposed to be located.

Newspaper Name: _____

Language: _____

Applicant or Applicant Representative Signature: _____

Title: _____ Date: _____

TEXAS COMMISSION ON ENVIRONMENTAL QUALITY



NOTICE OF RECEIPT OF APPLICATION AND INTENT TO OBTAIN WATER QUALITY PERMIT RENEWAL

PERMIT NO. WQ0001200000

APPLICATION. City Public Service Board, 500 McCullough Avenue, San Antonio, Texas 78215, which owns a natural gas-fired power generation facility, has applied to the Texas Commission on Environmental Quality (TCEQ) to renew Texas Pollutant Discharge Elimination System (TPDES) Permit No. WQ0001200000 (EPA I.D. No. TX0001627) to authorize the discharge of treated wastewater and stormwater at a volume not to exceed a daily average flow of 1,300,000 gallons per day. The facility is located at 7300 CPL Road, in the city of Laredo, Webb County, Texas 78041. The discharge route is from the plant site directly to the Rio Grande Below Amistad Reservoir. TCEQ received this application on July 16, 2025. The permit application will be available for viewing and copying at Joe A. Guerra Laredo Public Library, 1120 East Calton Road, Laredo, Webb County, Texas prior to the date this notice is published in the newspaper. The application, including any updates, and associated notices are available electronically at the following webpage:

<https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

This link to an electronic map of the site or facility's general location is provided as a public courtesy and not part of the application or notice. For the exact location, refer to the application.

<https://gisweb.tceq.texas.gov/LocationMapper/?marker=-99.508611,27.566944&level=18>

ALTERNATIVE LANGUAGE NOTICE. Alternative language notice in Spanish is available at:

<https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

El aviso de idioma alternativo en español está disponible en

<https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

ADDITIONAL NOTICE. TCEQ's Executive Director has determined the application is administratively complete and will conduct a technical review of the application. After technical review of the application is complete, the Executive Director may prepare a draft permit and will issue a preliminary decision on the application. **Notice of the Application and Preliminary Decision will be published and mailed to those who are on the county-wide mailing list and to those who are on the mailing list for this application. That notice will contain the deadline for submitting public comments.**

PUBLIC COMMENT / PUBLIC MEETING. You may submit public comments or request a public meeting on this application. The purpose of a public meeting is to provide the opportunity to submit comments or to ask questions about the application. TCEQ will hold a public meeting if the Executive Director determines that there is a significant degree of public

interest in the application or if requested by a local legislator. A public meeting is not a contested case hearing.

OPPORTUNITY FOR A CONTESTED CASE HEARING. After the deadline for submitting public comments, the Executive Director will consider all timely comments and prepare a response to all relevant and material, or significant public comments. **Unless the application is directly referred for a contested case hearing, the response to comments, and the Executive Director's decision on the application, will be mailed to everyone who submitted public comments and to those persons who are on the mailing list for this application.** If comments are received, the mailing will also provide instructions for requesting reconsideration of the Executive Director's decision and for requesting a contested case hearing. A contested case hearing is a legal proceeding similar to a civil trial in state district court.

TO REQUEST A CONTESTED CASE HEARING, YOU MUST INCLUDE THE FOLLOWING ITEMS IN YOUR REQUEST: your name, address, phone number; applicant's name and proposed permit number; the location and distance of your property/activities relative to the proposed facility; a specific description of how you would be adversely affected by the facility in a way not common to the general public; a list of all disputed issues of fact that you submit during the comment period and, the statement "[I/we] request a contested case hearing." If the request for contested case hearing is filed on behalf of a group or association, the request must designate the group's representative for receiving future correspondence; identify by name and physical address an individual member of the group who would be adversely affected by the proposed facility or activity; provide the information discussed above regarding the affected member's location and distance from the facility or activity; explain how and why the member would be affected; and explain how the interests the group seeks to protect are relevant to the group's purpose.

Following the close of all applicable comment and request periods, the Executive Director will forward the application and any requests for reconsideration or for a contested case hearing to the TCEQ Commissioners for their consideration at a scheduled Commission meeting.

The Commission may only grant a request for a contested case hearing on issues the requestor submitted in their timely comments that were not subsequently withdrawn. **If a hearing is granted, the subject of a hearing will be limited to disputed issues of fact or mixed questions of fact and law relating to relevant and material water quality concerns submitted during the comment period. TCEQ may act on an application to renew a permit for discharge of wastewater without providing an opportunity for a contested case hearing if certain criteria are met.**

MAILING LIST. If you submit public comments, a request for a contested case hearing or a reconsideration of the Executive Director's decision, you will be added to the mailing list for this specific application to receive future public notices mailed by the Office of the Chief Clerk. In addition, you may request to be placed on: (1) the permanent mailing list for a specific applicant name and permit number; and/or (2) the mailing list for a specific county. If you wish to be placed on the permanent and/or the county mailing list, clearly specify which list(s) and send your request to TCEQ Office of the Chief Clerk at the address below.

INFORMATION AVAILABLE ONLINE. For details about the status of the application, visit the Commissioners' Integrated Database at www.tceq.texas.gov/goto/cid. Search the database using the permit number for this application, which is provided at the top of this notice.

AGENCY CONTACTS AND INFORMATION. All public comments and requests must be submitted either electronically at <https://www14.tceq.texas.gov/epic/eComment/>, or in writing to the Texas Commission on Environmental Quality, Office of the Chief Clerk, MC-105, P.O. Box 13087, Austin, Texas 78711-3087. Please be aware that any contact information you provide, including your name, phone number, email address and physical address will become part of the agency's public record. For more information about this permit application or the permitting process, please call the TCEQ Public Education Program, Toll Free, at 1-800-687-4040 or visit their website at www.tceq.texas.gov/goto/pep. Si desea información en Español, puede llamar al 1-800-687-4040.

Further information may also be obtained from City Public Service Board at the address stated above or by calling Ms. Summer Johnson, Environmental Analyst, at 210-353-2770.

Issuance Date: August 11, 2025

Comisión de Calidad Ambiental del Estado de Texas



AVISO DE RECIBO DE LA SOLICITUD Y EL INTENTO DE OBTENER PERMISO PARA LA CALIDAD DEL AGUA RENOVACION

PERMISO NO. WQ0001200000

SOLICITUD. City Public Service Board, 500 McCullough Avenue, San Antonio, Texas 78215, que posee una planta de generación de energía a gas natural, ha solicitado a la Comisión de Calidad Ambiental del Estado de Texas (TCEQ) para renovar el Permiso No. WQ0001200000 (EPA I.D. No. TX 0001627) del Sistema de Eliminación de Descargas de Contaminantes de Texas (TPDES) para autorizar la descarga de aguas residuales tratadas en un volumen que no sobrepasa un flujo promedio diario de 1,300,000 galones por día. La planta está ubicada 7300 CPL Road, en la ciudad de Laredo, Condado de Webb, Texas 78041. La ruta de descarga es del sitio de la planta directamente al Río Grande debajo del embalse de la Amistad. La TCEQ recibió esta solicitud el 16 de julio de 2025. La solicitud para el permiso estará disponible para leerla y copiarla en Joe A. Guerra Laredo Public Library, 1120 East Calton Road, Laredo, Condado de Webb, Texas antes de la fecha de publicación de este aviso en el periódico. La solicitud (cualquier actualización y aviso inclusive) está disponible electrónicamente en la siguiente página web: <https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

Este enlace a un mapa electrónico de la ubicación general del sitio o de la instalación es proporcionado como una cortesía y no es parte de la solicitud o del aviso. Para la ubicación exacta, consulte la solicitud.

<https://gisweb.tceq.texas.gov/LocationMapper/?marker=-99.508611,27.566944&level=18>

AVISO DE IDIOMA ALTERNATIVO. El aviso de idioma alternativo en español está disponible en <https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

AVISO ADICIONAL. El Director Ejecutivo de la TCEQ ha determinado que la solicitud es administrativamente completa y conducirá una revisión técnica de la solicitud. Después de completar la revisión técnica, el Director Ejecutivo puede preparar un borrador del permiso y emitirá una Decisión Preliminar sobre la solicitud. **El aviso de la solicitud y la decisión preliminar serán publicados y enviado a los que están en la lista de correo de las personas a lo largo del condado que desean recibir los avisos y los que están en la lista de correo que desean recibir avisos de esta solicitud. El aviso dará la fecha límite para someter comentarios públicos.**

COMENTARIO PUBLICO / REUNION PUBLICA. Usted puede presentar comentarios públicos o pedir una reunión pública sobre esta solicitud. El propósito de una reunión pública es dar la oportunidad de presentar comentarios o hacer preguntas acerca de la solicitud. La TCEQ

realiza una reunión pública si el Director Ejecutivo determina que hay un grado de interés público suficiente en la solicitud o si un legislador local lo pide. Una reunión pública no es una audiencia administrativa de lo contencioso.

OPORTUNIDAD DE UNA AUDIENCIA ADMINISTRATIVA DE LO CONTENCIOSO. Después del plazo para presentar comentarios públicos, el Director Ejecutivo considerará todos los comentarios apropiados y preparará una respuesta a todo los comentarios públicos esenciales, pertinentes, o significativos. **A menos que la solicitud haya sido referida directamente a una audiencia administrativa de lo contencioso, la respuesta a los comentarios y la decisión del Director Ejecutivo sobre la solicitud serán enviados por correo a todos los que presentaron un comentario público y a las personas que están en la lista para recibir avisos sobre esta solicitud. Si se reciben comentarios, el aviso también proveerá instrucciones para pedir una reconsideración de la decisión del Director Ejecutivo y para pedir una audiencia administrativa de lo contencioso.** Una audiencia administrativa de lo contencioso es un procedimiento legal similar a un procedimiento legal civil en un tribunal de distrito del estado.

PARA SOLICITAR UNA AUDIENCIA DE CASO IMPUGNADO, USTED DEBE INCLUIR EN SU SOLICITUD LOS SIGUIENTES DATOS: su nombre, dirección, y número de teléfono; el nombre del solicitante y número del permiso; la ubicación y distancia de su propiedad/actividad con respecto a la instalación; una descripción específica de la forma cómo usted sería afectado adversamente por el sitio de una manera no común al público en general; una lista de todas las cuestiones de hecho en disputa que usted presente durante el período de comentarios; y la declaración "[Yo/nosotros] solicito/solicitamos una audiencia de caso impugnado". Si presenta la petición para una audiencia de caso impugnado de parte de un grupo o asociación, debe identificar una persona que representa al grupo para recibir correspondencia en el futuro; identificar el nombre y la dirección de un miembro del grupo que sería afectado adversamente por la planta o la actividad propuesta; proveer la información indicada anteriormente con respecto a la ubicación del miembro afectado y su distancia de la planta o actividad propuesta; explicar cómo y porqué el miembro sería afectado; y explicar cómo los intereses que el grupo desea proteger son pertinentes al propósito del grupo.

Después del cierre de todos los períodos de comentarios y de petición que aplican, el Director Ejecutivo enviará la solicitud y cualquier petición para reconsideración o para una audiencia de caso impugnado a los Comisionados de la TCEQ para su consideración durante una reunión programada de la Comisión.

La Comisión sólo puede conceder una solicitud de una audiencia de caso impugnado sobre los temas que el solicitante haya presentado en sus comentarios oportunos que no fueron retirados posteriormente. **Si se concede una audiencia, el tema de la audiencia estará limitado a cuestiones de hecho en disputa o cuestiones mixtas de hecho y de derecho relacionadas a intereses pertinentes y materiales de calidad del agua que se hayan presentado durante el período de comentarios. Si ciertos criterios se cumplen, la TCEQ puede actuar sobre una solicitud para renovar un permiso sin proveer una oportunidad de una audiencia administrativa de lo contencioso.**

LISTA DE CORREO. Si somete comentarios públicos, un pedido para una audiencia administrativa de lo contencioso o una reconsideración de la decisión del Director Ejecutivo,

la Oficina del Secretario Principal enviará por correo los avisos públicos en relación con la solicitud. Además, puede pedir que la TCEQ ponga su nombre en una o más de las listas correos siguientes (1) la lista de correo permanente para recibir los avisos del solicitante indicado por nombre y número del permiso específico y/o (2) la lista de correo de todas las solicitudes en un condado específico. Si desea que se agregue su nombre en una de las listas designe cual lista(s) y envía por correo su pedido a la Oficina del Secretario Principal de la TCEQ.

INFORMACIÓN DISPONIBLE EN LÍNEA. Para detalles sobre el estado de la solicitud, favor de visitar la Base de Datos Integrada de los Comisionados en www.tceq.texas.gov/goto/cid. Para buscar en la base de datos, utilizar el número de permiso para esta solicitud que aparece en la parte superior de este aviso.

CONTACTOS E INFORMACIÓN A LA AGENCIA. Todos los comentarios públicos y solicitudes deben ser presentadas electrónicamente vía <http://www14.tceq.texas.gov/epic/eComment/> o por escrito dirigidos a la Comisión de Texas de Calidad Ambiental, Oficial de la Secretaría (Office of Chief Clerk), MC-105, P.O. Box 13087, Austin, Texas 78711-3087. Tenga en cuenta que cualquier información personal que usted proporcione, incluyendo su nombre, número de teléfono, dirección de correo electrónico y dirección física pasarán a formar parte del registro público de la Agencia. Para obtener más información acerca de esta solicitud de permiso o el proceso de permisos, llame al programa de educación pública de la TCEQ, gratis, al 1-800-687-4040. Si desea información en Español, puede llamar al 1-800-687-4040.

También se puede obtener información adicional del City Public Service Board a la dirección indicada arriba o llamando a Summer Johnson, Análisis ambiental, al 210-353-2770.

Fecha de emisión: 11 de agosto de 2025